

Milling Cutters

H1 to H251

H



Face Milling	For General Milling of Steel, Die Steel, Cast Iron, Stainless Steel, Exotic Alloys, and Non-Ferrous Metal	SEC-WaveMill WGX series H20
	For General Milling of Steel, Die Steel, Cast Iron, Stainless Steel, Exotic Alloys, and Non-Ferrous Metal	SEC-WaveMill WGC series H26
Shoulder Milling	For General Milling of Steel, Die Steel, Cast Iron, Stainless Steel, Exotic Alloys, and Non-Ferrous Metal	SEC-Sumi Dual Mill DGC series H30
	For General Milling of Steel and Exotic Alloy	SEC-SUMI UFO MILL UFO series H36
	For General Milling of Stainless Steel and Exotic Alloy	SEC-MILL GRC series H39
	For General Milling of Steel and Exotic Alloy	SEC-ACE MILL FPG series H40
	For General Milling of Steel and Exotic Alloy	SEC-Multi Use Endmill FPE series H41
	For General Milling of Steel and Exotic Alloy	SEC-ACE MILL EHG series H42
	For High-efficiency Cast Iron/Cast Steel Milling	SEC-DNX(F) series / DNH series, DNHS series H44
	For General Milling of Steel and Cast Iron	SEC-ACE MILL DNF series H47
	For General Milling of Non-Ferrous Metal	SEC-ACE MILL APG series H48
	For General Milling of Steel, Cast Iron and Stainless Steel	SEC-ACE MILL DPG series / DPGF series H49
High-Feed	For High-precision Milling of Steel, Die Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	SEC-WaveMill WEZ series H52
	For High-precision Milling of Steel, Die Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	new SEC-WaveMill WEZR series H76
	For High-precision Milling of Steel, Die Steel, Cast Iron, Stainless Steel, Exotic Alloys, and Non-Ferrous Metal	SEC-WaveMill WEX series H86
	For High-efficiency Deep-Step Shoulder Milling	SEC-Wave Repeater WRX series H96
	For Roughing of Stainless Steel and Exotic Alloy	new SEC-WaveMill WSE series H102
	For General Milling of Steel, Die Steel, Cast Iron, Stainless Steel, and Non-Ferrous Metal	SEC-WaveMill WFX series H108
	For General Milling of Steel and Cast Iron	SEC-Sumi Dual Mill DFC series H117
	For High-efficiency Milling of Steel, Cast Iron and Stainless Steel	SEC-Sumi Dual Mill TSX series H124
	For High-efficiency Cast Iron/Cast Steel Milling	SEC-Sumi Power Mill PWC(F) series H152
	For Milling of Steel, Cast Iron and Stainless Steel	SEC-Sumi Power Mill PWS(F) series / PWSR series ... H153
	For Milling of Steel, Cast Iron and Stainless Steel	SEC-ACE MILL CHG series H156
	For Milling of Steel, Cast Iron and Non-Ferrous Metal	SEC-Multi Use Endmill CHE series H157
Multi-purpose	For Milling of Steel, Cast Iron and Stainless Steel	SEC-ACE MILL CPG series H160
	For Milling of Steel, Cast Iron and Stainless Steel	SEC-Light Endmill FMS series H161
	For High-feed Milling of Steel, Die Steel, Cast Iron, and Stainless Steel	new SEC-Sumi Dual Mill DMSL series / DMSW series ... H162
Radius	For High-speed, High-efficiency Milling of Steel, Die Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	SEC-WaveMill WFXH series H174
	For High Feed Milling of Steel, Cast Iron and Stainless Steel	SEC-Metal Slash Mill MSX series H180
	For Milling of Stainless Steel and Exotic Alloy	SEC-WaveMulti WMM series H184
R/3D Profiling	For Milling of Steel, Die Steel, Cast Iron, Stainless Steel and Exotic Alloy	new SEC-Wave Radius Mill RSE series H188
	For Milling of Steel, Die Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	SEC-Wave Radius Mill RSX series H194
	For Milling of Steel, Die Steel, Cast Iron, Stainless Steel and Non-Ferrous Metal	SEC-Wave Radius Mill WRCX series H202
Side Cutters / T-Slot Cutters	For Roughing	SEC-WaveBall WBMR series H207
	For Finishing	SEC-WaveBall WBMF series H210
Chamfering	For Groove Milling	new SEC-Sumi Dual Mill TGC series H212
	For T-Slot Endmilling	SEC-T Slot Cutters TSE series H218
Non-Ferrous Metals	For Chamfering	SEC-WaveMill WFXC series H219
	For Chamfering	SEC-Chamfering Cutters SMC series H222
Cast Iron, High-Speed	For High-speed, High-efficiency Milling of Aluminum Alloy and Non-Ferrous Metal	Expansion ALNEX ANX Series H224
	For High-efficiency Milling of Aluminum Alloy and Non-Ferrous Metal	HF series H234
	For High-speed Milling of Aluminum Alloy and Non-Ferrous Metal	RF series H240
	For Small Diameter Milling of Aluminum Alloy and Non-Ferrous Metal	SRF series H242
Expansion	For High-speed, High-efficiency Milling of Non-Ferrous Metal	SEC-WaveMill WAX series H244
	For High-speed Finishing of Cast Iron	Expansion SUMIBORON BN Finish Mill EASY (FMU/FMU-E series) ... H249
	For High-speed Finishing of Cast Iron	Expansion SUMIBORON BN Finish Mill (FM series / FMF series) ... H250
	For High-speed, High-efficiency Milling of Cast Iron	Cutter RM series for High-speed Milling of SUMIBORON Cast Iron ... H251

H Modular ToolsH253

H Special Purpose Cutters ...H275

Stock Markings and Symbols

- mark: Standard stocked item
- mark: To be replaced with the new item featured on the same page
- ▲ mark: To be replaced by a new product, made to order, or discontinued (please confirm stock availability)

- * mark: Semi-standard stock (please confirm stock availability)
- mark: Stock or planned stock (please confirm stock availability)
- Blank: Made-to-order item
- mark: Not available

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters / T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Selection Guide for Milling Cutters

◎: Best ○: Suitable ✕: Unsuitable Blank: Not Recommended

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius













































Radial/3D Profiling

Side Cutters T-Slot Cutters


Chamfering












Non-Ferrous Metals

Cast Iron, High-Speed

Applications	Cutting Angle / Maximum Depth of Cut 	Dia. (mm)	Shank Dia. (mm)	Series (Page)	Model	Insert Shape Example 	Rake Angle Axial Radial	Application											Work Material								
								Face Milling		Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti-Alloy/Heat-Resistant Alloy	HRC 55-65 Hardened Steel			
								General-purpose	Finishing																High-Feed	High-Feed	High-Feed
Face Milling		ø40 to ø250	-	WGX 	WGX13000R(S) WGXM13000R(S) WGXF13000R(S) →H22		20° to 22° / -20° to -24°	◎	◎									◎	◎	◎	◎	◎	◎	◎			
								◎	◎																		
Face Milling		ø32 to ø63	ø32	WGX-EW 	WGX13000EW →H25		20° to 22° / -20° to -24°	◎	◎																		
								◎	◎																		
Shoulder Milling		ø32 to ø100	-	WGC 	WGC3000 WGC3000RS →H26		20° / -10° to -19°	◎	◎																		
							20° to 22° / -20° to -24°	◎	◎																		
High-Feed		ø20 to ø63	ø20 to ø32	WGC-EW 	WGC3000EW →H28		20° / -10° to -19°	◎	◎																		
							20° to 22° / -20° to -24°	◎	◎																		
Multi-purpose		ø40 to ø250	-	DGC 	DGC13000R(S) DGCM13000R(S) DGCF13000R(S) →H32		-5° / -10°	◎																			
								◎																			
Radius		ø40 to ø63	ø32	DGC-EW 	DGC13000EW →H35		-5° / -10°	◎																			
								◎																			
Face Milling		ø40 to ø63	ø32	DGC-EW 	DGC13000EW →H35		-5° / -10°	◎																			
								◎																			
Radial/3D Profiling		ø80 to ø315	-	UFO 	UFO4000 →H36		27° / -7°	○	○																		
								○	○																		
Side Cutters T-Slot Cutters		ø80 to ø315	-	UFO 	UFO5000 →H36		27° / -7°	○	○																		
								○	○																		
Chamfering		ø50 to ø100	ø32 to ø42	UFO-E 	UFO4000E →H38		27° / -7°	○	○																		
								○	○																		
Non-Ferrous Metals		ø80 to ø250	-	GRC 	GRC6000 →H39		25° / 10°	○																			
								○																			
Cast Iron, High-Speed		ø80 to ø315	-	FPG 	FPG4000 →H40		15° / -4°	○																			
								○																			
Cast Iron, High-Speed		ø80 to ø315	-	FPG 	FPG5000 →H40		15° / -4°	○																			
								○																			
Cast Iron, High-Speed		ø50 to ø100	ø32 to ø42	FPE 	FPE4000 →H41		15° / -3°	○																			
								○																			

*Use a chamfering cutter for chamfering operations. * The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Smart Damper™ for Milling  G20 *Smart Damper™ is a registered trademark of BIG DAISHOWA Co., Ltd.

Applications	Cutting Angle / Maximum Depth of Cut 	Dia. (mm)	Shank Dia. (mm)	Series	Model	Insert Shape Example	Rake Angle	Application											Work Material								
								Axial	Radial	Face Milling			Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing		P	M	K	N	S	H	
										General-purpose	Finishing	High-Feed							General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel							Stainless Steel
Face Milling	5.5mm / 45°	ø80 to ø200	—	EHG	EHG4000		20°	-3°										○	○	○							
	7.5mm / 45°	ø80 to ø200	—	→H42	EHG5000	(4)	20°	-3°	○									○	○	○							
	8mm / 65°	ø80 to ø160	—	DNX	DNX12000 DNXF12000		-5°	-6°	○	○										○							
	3mm / 24°	ø80 to ø160	—	DNH(S)	DNH12000 DNHS12000		-5°	-6°	○											○							
	5mm / 24°																										
	6.5mm / 65°	ø80 to ø500	—	DNF	DNF4000		-5°	-6°	○	○										○	○	○	○				
	7mm / 65°	ø80 to ø500	—	APG	APG4000		18°	-2°	○	○															○		
	9.5mm / 75°	ø80 to ø200	—	DPG	DPG4000 DPGF4000		8°	0°	○	○											○	○	○	○			
12mm / 75°	ø82 to ø502	—	DPG5000		(4)																						8°
Shoulder Milling / Deep Shoulder Milling / Semi-Shoulder Milling	10mm / 90°	ø40 to ø100	—	WEZ	WEZ11000R(S)		14°	-7° to -11°																			
	15mm / 90°	ø40 to ø160	—	→H60	WEZ17000R(S)		10°	-4° to -9°	○	○																	
	10mm / 90°	ø14 to ø80	ø10 to ø32	WEZ-E	WEZ11000E WEZ11000ES WEZ17000E WEZ17000ES WEZ17000EL		6°	-7° to -18°	○	○																	
	15mm / 90°	ø25 to ø80	ø16 to ø42	→H64	WEZ17000E WEZ17000EL	(2)	6°	-6° to -12°	○	○																	
	44.53mm / 90°	ø40 to ø50	—	WEZR <i>NEW!</i>	WEZR11000RS		14°	-11° to -9°																			
	29.84mm / 90°	ø50 to ø80	—	→H78	WEZR17000RS		7°	-8° to -6°	○																		
	19.61mm / 90°	ø20 to ø40	ø20 to ø32	WEZR-E <i>NEW!</i>	WEZR11000E	(2)	8°	-15° to -11°																			
	29.84mm / 90°	ø40 to ø50	ø32 to ø42	→H82	WEZR17000E		21°	-9° to -8°																			
	6mm / 90°	ø32 to ø63	—	WEX-F/R	WEX1000F		9°	-7° to -17°																			
	10mm / 90°	ø40 to ø63	—	→H90	WEX2000F		23°	-16° to -18°	○																		
	14mm / 90°	ø40 to ø125	—		WEX3000F WEX3000R WEXF3000R			19°	-12° to -15°																		
	6mm / 90°	ø10 to ø25	ø10 to ø20	WEX-E	WEX1000E WEX1000EL		(2)	9°	-7° to -17°																		
	10mm / 90°	ø14 to ø63	ø16 to ø32		WEX2000E WEX2000EL		14°	-10° to -18°	○																		
14mm / 90°	ø25 to ø63	ø20 to ø42	→H93	WEX3000E(-C) WEX3000ES(-C) WEX3000EL		16°	-8° to -15°																				

*Use a chamfering cutter for chamfering operations. * The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

©: Best ○: Suitable ✕: Unsuitable Blank: Not Recommended

Applications	Cutting Angle / Maximum Depth of Cut	Dia. (mm)	Shank Dia. (mm)	Series	Model	Insert Shape Example	Rake Angle	Application													Work Material					
								Face Milling		Shoulder Milling		Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	General Steel	Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti Alloy/Heat-Resistant Alloy	Hardened Steel
								General-purpose	Finishing	High-Feed	Shoulder Milling							Groove Milling	General Steel	Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti Alloy/Heat-Resistant Alloy
								Axial	Radial	General-purpose	Finishing	High-Feed	Shoulder Milling	Groove Milling	General Steel	Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti Alloy/Heat-Resistant Alloy	Hardened Steel			
Shoulder Milling / Deep Shoulder Milling / Semi-Shoulder Milling		ø80 to ø200	-	PWC 	PWC4000 PWCF4000 →H152		-5° -15°	○	○	○																
		ø80 to ø250	-	PWS 	PWS4000 PWSF4000 PWSR4000 →H154		-6° -15°	○	○	○																
		ø80 to ø315	-	CHG 	CHG4000 →H156		15° 4°	○	○																	
		ø16 to ø28	ø16 to ø25	CHE 	CHE2000		6° to 15°	-3° to 0°	○	○	○															
		ø30 to ø40	ø32		CHE3000		15°	-3° to 0°																		
		ø50 to ø80	ø32 to ø42		CHE4000 →H157		15°	2° to 4°																		
		ø80 to ø315	-	CPG 	CPG4000 →H160		6° 0°		○	○																
		ø16 to ø60	ø16 to ø42	FMS 	FMS →H161		3° to 7°	-4° to -6°		○	○															
High-Feed		ø32.3 to ø55.3	-	DMSL 	DMSL06000R(S) →H166		-8°	-8° to -12.5°		◎	○	○	○									◎	◎			
		ø50 to ø160	-	DMSW 	DMSW08000R(S) →H168		-6°	-7° to -10°		◎	○	○	○									◎	◎			
		ø8.4 to ø32.3	ø16 to ø32	DMSL-E 	DMSL06000E(L) →H170		-8°	-12.5° to -16.5°		◎	○	○	○									◎	◎			
		ø35 to ø63	ø32 to ø42	DMSW-E 	DMSW08000E(L) →H172		-6°	-10° to -13°		◎	○	○	○									◎	◎			
		ø40 to ø63	-	WFXH 	WFXH08000RS		-6°	6°		◎	○	○	○										◎	◎		
		ø50 to ø63	-		WFXH12000RS →H177		-6°	6°		◎	○	○	○	○										◎	◎	

*The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Smart Damper™ for Milling *Smart Damper™ is a registered trademark of BIG DAISHOWA Co., Ltd.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Selection Guide for Milling Cutters

◎: Best ○: Suitable ×: Unsuitable Blank: Not Recommended

Milling
Cutters

High-Feed

Face Milling

Multi-purpose
Shoulder Milling

High-Feed

Multi-purpose

Radius



































Radial/3D
Profiling

Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous
Metals







































Cast Iron,
High-Speed

Applications	Cutting Angle / Maximum Depth of Cut 	Dia. (mm) Shank Dia. (mm)	Series (Page)	Model	Insert Shape Example 	Rake Angle	Application												Work Material												
							Application												P	M	K	N	S	H							
							Face Milling	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti Alloy/Heat-Resistant Alloy	Hardened Steel									
Axial	Radial	General-purpose Finishing	High-Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	General-purpose Finishing	High-Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti Alloy/Heat-Resistant Alloy	Hardened Steel				
High-Feed		ø40 to ø100	MSX  →H182	MSX08000RS MSX12000RS MSX14000R(S)		8°	-3° to -8°		◎												◎	◎	◎	◎				○			
		ø16 to ø63	MSX-E  →H183	MSX06000E MSX08000E MSX12000E MSX14000E	(3)	8°	-3° to -8°		◎												◎	◎	◎	◎				○			
Multi-purpose		ø20 to ø30	WMM  →H185	WMM2000E/EL WMM2000ELH /EXLH		7° to 11°	15° to 16°		◎												◎	◎	◎	◎	◎	◎					
		ø32 to ø40		WMM3000E/EL WMM3000ELH /EXLH	(2)	7° to 11°	17° to 19°																								
High-Feed		ø40 to ø50	RSE  →H190	RSE10000RS		4°	-5°			○																			◎		
																															
Multi-purpose		ø40 to ø80		RSE12000R(S)	(4)	4°	-5°		○	○																				◎	
																															
Radius		ø25 to ø32	RSE-E  →H192	RSE10000E		4°	0°			○																				◎	
																															
Radius		ø40 to ø52	RSX  →H197	RSX10000 RSXF10000		10°	-5°																								
		ø40 to ø100		RSX12000 RSXF12000		10°	-5°																								
																															
		ø63 to ø160		RSX16000 RSXF16000	(4) (8)	10°	-5°		○	○	○	○	◎																		◎
																															
		ø80 to ø160		RSX20000 RSXF20000		10°	-5°																								
Non-Ferrous Metals		ø20 to ø25	RSX-ES  →H201	RSX08000ES RSXF08000ES		10°	-8°																								
		ø25 to ø32		RSX10000ES RSXF10000ES		10°	-5°																								
		ø32		RSX12000ES RSXF12000ES	(4) (8)	10°	-5°			○	○	○	○	◎																	◎
Cast Iron, High-Speed		ø32				10°	-5°																								
																															


*The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Smart Damper™ for Milling G20 *Smart Damper™ is a registered trademark of BIG DAISHOWA Co., Ltd.

©: Best ○: Suitable ×: Unsuitable Blank: Not Recommended

Applications	Cutting Angle / Maximum Depth of Cut 	Dia. (mm)	Shank Dia. (mm)	Series (Page)	Model	Insert Shape Example 	Rake Angle	Application									Work Material									
								Axial	Radial	General-purpose	Face Milling	High-Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling								
																			General-purpose	Face Milling	High-Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling
Radius		ø40 to ø80	-	WRCX  →H203	WRCX12000 WRCXF12000		-3° 0°																			
		ø63 to ø100	-		WRCX16000 WRCXF16000		-3° 0°	○	○	○	○	○						○	○	○	○	○	○			
		ø125 to ø160	-		WRCX20000		-3° 0°												○	○	○	○	○	○		
		ø20 to ø25	ø20 to ø25	WRCX-E  →H206	WRCX08000E		-3° -3° to 0°																			
		ø25 to ø32	ø25 to ø32		WRCX10000E		-3° 0°	○	○	○	○	○							○	○	○	○	○	○		
		ø40 to ø50	ø32		WRCX16000E		-3° 0°																			
R/3D Profiling		R10 (ø20) to R25 (ø50)	ø25 to ø50.8	WBMR  →H208	WBMR2000		-10° -																			
					WBMR2000L		-10° -																			
		R5 (ø10) to R15 (ø30)	ø16 to ø32	WBMF  →H211	WBMF1000		0° -																			
Side Cutters / T-Slot Cutters		ø100 to ø200	-	TGC  Standard Disc Shape →H215	TGC13000		10° -11.5° to -9.5°	○																		
		ø21 to ø50	ø25 to ø32		TSE  →H218	TSE		0° 0°																		
Chamfering		ø8 to ø16	ø10 to ø16	WFXC-E  →H220	WFXC08000E		0° 0°																			
		ø25 to ø32	ø25 to ø32		WFXC12000E		0° 0°																			
		ø7 to ø35	ø32	SMC  →H222	SMC		0° 0°																			
Non-Ferrous Metals		ø80 to ø160 ø40 to ø125	-	ANX  →H228	ANXA16000R(S)		5° 5°																			
					ANXS16000R(S)		5° 5°	○	○	○	○															
ANXS16000E					5° -2° to 0°																					
		ø25 to ø50	ø20 to ø32	ANX-E  →H232	ANXS16000E		5° -2° to 0°	○	○	○	○	○														

*The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Smart Damper™ for Milling  *Smart Damper™ is a registered trademark of BIG DAISHOWA Co., Ltd.

Selection Guide for Milling Cutters

◎: Best ○: Suitable ✕: Unsuitable Blank: Not Recommended

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius





































Radial/3D Profiling

Side Cutters T-Slot Cutters


Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



















































Applications	Cutting Angle / Maximum Depth of Cut	Dia. (mm)	Shank Dia. (mm)	Series	Model	Insert Shape Example	Rake Angle	Application													Work Material											
								Axial		Radial		Face Finishing	High-Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing						P	M	K	N	S	H	
								General-purpose	Finishing	General-purpose	Finishing									General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy							Ti Alloy/Heat-Resistant Alloy
Non-Ferrous Metals		ø80 to ø125	-	HF  →H236	HFM12000RS/R	 (1)	10°	4°	◎	◎									×	×	×	×	○	◎	×							
					HFF12000RS/R																											
					HFFH12000RS/R																											
					HFFH12000R-BBT30																											
		ø80 to ø200	-	RF  →H241	RF4000	 (1)	10°	4°	◎	◎									×	×	×	×	○	◎	×							
		ø30 to ø63	ø20	SRF  →H243	SRF	 (1)	6°	-2° to 4°	◎	◎	○								×	×	×	×	○	◎	×							
					SRF-ST																											
		ø50 to ø125	-	WAX  →H245	WAX3000	 (2)	19° to 25°	6°	○	◎	◎	◎							×	×	×	×	○	◎	×							
					WAX4000																											
	ø20 to ø40	ø20 to ø32	WAX-E  →H246	WAX3000E	 (2)	19° to 25°	6°	○	◎	◎	◎							×	×	×	×	○	◎	×								
				WAX3000EL																												
	ø25 to ø40	ø25 to ø32	WAX-E  →H246	WAX4000E	 (2)	19° to 25°	6°	○	◎	◎	◎							×	×	×	×	○	◎	×								
				WAX4000EL																												
	ø80 to ø200	-	FAM  →M56	FAM	 (1)	13°	4°	○	○									×	×	×	×	○	○	×								
	ø80 to ø100	-	SAM  →M56	SAM	 (1)	10°	6°	○	○	○								×	×	×	×	○	○	×								
	ø50 to ø80	ø32	SAM-E  →M57	SAM-E	 (1)	10°	0° to 2°	○	○	○								×	×	×	×	○	○	×								
Cast Iron, High-Speed		ø37 to ø315	FMU  →H249, L143	FMU	 (1)	8°	2°	◎										×	×	×	◎(FC)	×	×	×								
				FMU-E																												
	ø80 to ø160	-	FM  →H250, L144	FM	 (1)	8°	2°	◎										×	×	×	◎(FC)	×	×	×								
				FMF																												
	ø80 to ø160	-	RM  →H251, L145	RM	 (4)	-5°	-6°	○	◎									×	×	×	◎(FC)	×	×	×								

*The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Smart Damper™ for Milling  *Smart Damper™ is a registered trademark of BIG DAISHOWA Co., Ltd.

Selection Guide for Modular Tools

◎: Best ○: Suitable ✕: Unsuitable Blank: Not Recommended

Applications	Cutting Angle / Maximum Depth of Cut 	Dia. (mm)	Shank Dia. (mm)	Series (Page)	Model	Insert Shape Example 	Rake Angle	Application											Work Material							
								Face Milling	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	General Purpose		M	K	N	S	H				
																General Purpose	Finishing High-Feed						P	M		
Shoulder Milling / Deep Shoulder Milling		ø16 to ø40	ø15 to ø32	WEZ-M Modular 	WEZ11000M		6° to 15° / -7° to -18°	◎	◎	◎	◎							◎	◎	◎	◎	◎	◎			
		ø25 to ø40	ø23 to ø32	WEZ-M Modular 	WEZ17000M		6° to 15° / -6° to -12°																			
		ø32	-	WEZR-M Modular New 	WEZR11000M		11° / -12°			◎	◎							◎	◎	◎	◎	◎	◎	◎		
		ø40	-	WEZR-M Modular New 	WEZR17000M		10° / -9°																			
		ø16 to ø40	ø15 to ø32	WEX-M Modular 	WEX2000M		14° to 25° / 10° to 18°			◎																
		ø25 to ø40	ø23 to ø32	WEX-M Modular 	WEX3000M		16° to 24° / 8° to 15°																			
High-Feed		ø20 to ø40	ø18 to ø32	WFX-M Modular 	WFX08000M		12° / -6°	◎	◎																	
		ø8.4 to ø34.3	-	DMSL-M Modular New 	DMSL06000M		-8° / -12.5° to -16.5°											◎	◎					◎	◎	
		ø35 to ø42	-	DMSW-M Modular 	DMSW08000M		-6° / -11° to -13°																		◎	
		ø25 to ø32	ø23 to ø32	WFXH-M Modular 	WFXH08000M		6° / -6°																			
		ø40	ø28 to ø32	WFXH-M Modular 	WFXH12000M		6° / -6°																			
		ø16 to ø24.7	ø15 to ø25	MSX-M Modular 	MSX06000M		8° / -3° to -6°																			
Radius		ø25 to ø32	ø23 to ø32	RSX-M Modular 	RSX10000M		10° / -5°																			
		ø32 to ø40	ø28 to ø32	RSX-M Modular 	RSX12000M		10° / -5°																			
		ø20 to ø32	ø18 to ø32	RSX-M Modular 	RSX08000M		10° / -8°	◎																		
		ø25 to ø32	ø23 to ø32	RSX-M Modular 	RSXF10000M		10° / -5°																			
		ø32 to ø40	ø28 to ø32	RSX-M Modular 	RSXF12000M		10° / -5°																			

Shank diameters listed are sizes of corresponding arbors. Refer to page H255 for details.

*The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Selection Guide for Modular Tools / Cast Iron High-Feed and Milling Cutters (Special Purpose)

©: Best ○: Suitable ✕: Unsuitable Blank: Not Recommended






















































Applications	Cutting Angle / Maximum Depth of Cut 	Dia. (mm) Shank Dia. (mm)	Series (Page)	Model	Insert Shape Example (No. of Cutting Edges)	Rake Angle		Application										Work Material									
						Axial	Radial	Face Milling	General-purpose Finishing	High-Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti Alloy/Heat-Resistant Alloy	Hardened Steel		
Radius		ø20 to ø25	WRCX-M Modular →H272	WRCX08000M		-3°	0° to 3°	○	○	○	○	○	○				○	○	○	○	○	○					
								○	○	○	○	○				○	○	○	○	○							
								○	○	○	○	○				○	○	○	○	○							
		ø40				0°																					
Chamfering		ø16 to ø32	WFXC-M Modular →H273	WFXC08000M		0°	0°										○	○	○	○	○	○					
				WFXC12000M				○																			
High-Feed		ø25 to ø40	ANXS-M Modular →H274	ANXS16000M		5°	-2° to 0°	○	○	○	○																
High Feed Cast Iron Machining		ø63 to ø315	GFX →H278	GFX(C)13000		-5°	-8°		○																		
				GFX16000																							
Radius		ø80 to ø315	GRHN →H280	GRHNF17000		-6°	-30' to 5°				○																
				GRHNM17000																							
Milling Cutters (Special Purpose)		ø100 to ø450	NRV →H284	NRV4000		-5°	-6°				○																
				NRV5000																							
Side Cutters T-Slot Cutters		ø100 to ø450	DPV →H285	DPV4000		10°	5°				○	○															
				DPV5000																							
Chamfering		ø100 to ø450				10°	5°																				
Non-Ferrous Metals		ø100 to ø450	NFV →H286	NFV4000		-5°	-6°	○	○																		
				NFV5000																							
Cast Iron, High-Speed		ø200 to ø450	APV →H287	APV5000		18°	-2°	○	○																		

*Use a chamfering cutter for chamfering operations. * The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Smart Damper™ for Milling G20 *Smart Damper™ is a registered trademark of BIG DAISHOWA Co., Ltd.

Selection Guide for Milling Cutters (Shank type)

◎: Best ○: Suitable ×: Unsuitable Blank: Not Recommended

Applications	Cutting Angle / Maximum Depth of Cut 	Dia. (mm)	Shank Dia. (mm)	Series	Model	Insert Shape Example 	Rake Angle	Application												Work Material					
								Axial	Radial	General-purpose	Face Milling	High-Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	P	M	K	N	S	H
																				General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy
Face Milling	 6mm / 45°	ø32 to ø63	ø32	WGX-EW 	WGX13000EW →H25		20° to 22° / -20° to -24°	◎	◎									◎	◎	◎	◎	◎	◎		
	 4mm / 45°	ø20 to ø63	ø20 to ø32	WGC-EW 	WGC3000EW		20° / -10° to -19°	◎	◎									◎	◎	◎	◎	◎	◎		
	 6mm / 45°	ø32 to ø63	ø32		WGC4000EW →H28		20° to 22° / -20° to -24°																	◎	
	 6mm / 45°	ø40 to ø63	ø32	DGC-EW 	DGC13000EW →H35		-5° / -10°	◎										◎	◎	◎	◎	◎	◎	◎	
	 3mm / 45°																								
	 5.5mm / 45°	ø50 to ø100	ø32 to ø42	UFO-E 	UFO4000E →H38		27° / -7°	○	○										○	○	○	○	○	○	
 6.5mm / 45°	ø50 to ø100	ø32 to ø42	FPE 	FPE4000 →H41		15° / -3°	○											○	○	○	○	○	○		
Shoulder Milling / Deep Shoulder Milling	 10mm / 90°	ø14 to ø80	ø10 to ø32	WEZ-E 	WEZ11000E WEZ11000ES WEZ11000EL →H64		6° to 15° / -7° to -18°	◎	◎		◎	◎	◎					◎	◎	◎	◎	◎	◎	◎	
	 15mm / 90°	ø25 to ø80	ø16 to ø42		WEZ17000E WEZ17000ES WEZ17000EL		6° to 15° / -6° to -12°																		
	 19.61mm / 90°	ø20 to ø40	ø20 to ø32	WEZR-E 	WEZR11000E →H82		8° to 14° / -15° to -11°	○				◎	◎						◎	◎	◎	◎	◎	◎	
	 29.84mm / 90°	ø40 to ø50	ø32 to ø42		WEZR17000E		10° to 12° / -9° to -8°																		
	 6mm / 90°	ø10 to ø25	ø10 to ø20	WEX-E 	WEX1000E WEX1000EL		9° to 17° / 7° to 17°																		
	 10mm / 90°	ø14 to ø63	ø16 to ø32		WEX2000E WEX2000EL		14° to 25° / 10° to 18°	○				◎	◎	◎					◎	◎	◎	◎	◎	◎	
	 14mm / 90°	ø25 to ø63	ø20 to ø42		WEX3000E(-C) WEX3000ES(-C) WEX3000EL →H93		16° to 24° / 8° to 15°																		
	 18.36mm / 90°	ø20 to ø40	ø20 to ø42	WRX-E 	WRX2000E →H100		16° to 24° / 13° to 16°	○				◎	◎	◎					◎	◎	◎	◎	◎	◎	
	 27.53mm / 90°	ø40 to ø50	ø32 to ø42		WRX3000E		20° to 22° / 12° to 13°																		
	 15mm / 90°	ø32	ø32	WSE-E 	WSE16000E →H106		8° / -9°	○				◎	◎	◎											◎
	 6mm / 90°	ø20 to ø63	ø16 to ø32	WFX-E 	WFX08000E WFXM08000E		12° / -6°		○	◎		◎	◎						◎	◎	◎	◎	◎	◎	
	 10mm / 90°	ø40 to ø80	ø32		WFX12000E WFXF12000E →H115		8° / -8°																		
 6mm / 90°	ø25 to ø80	ø25 to ø42	DFC-E 	DFC09000E DFCM09000E →H123		-5° / -9°	◎	○			◎	◎						◎	◎	◎	◎	◎	◎		

*Use a chamfering cutter for chamfering operations. * The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Selection Guide for Milling Cutters (Shank type)

◎: Best ○: Suitable ✕: Unsuitable Blank: Not Recommended

Milling Cutters

Face Milling

Shoulder Milling / Deep Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Applications	Cutting Angle / Maximum Depth of Cut	Dia. (mm)	Shank Dia. (mm)	Series	Model	Insert Shape Example	Rake Angle	Application											Work Material						
								Face Milling		Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing									
								General-purpose	Finishing							High-Feed	General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti Alloy/Heat-Resistant Alloy	Hardened Steel	
Shoulder Milling / Deep Shoulder Milling		ø16 to ø80	ø16 to ø32	TSX-E <i>(Page)</i>	TSX08000E TSXF08000E		-36° to -20° -6°	◎	◎	◎	○							◎	◎	◎	◎	◎			
		ø25 to ø80	ø25 to ø32	→H136	TSX13000E TSXM13000E TSXF13000E																				
		ø20 to ø40	ø20 to ø32	TSXR-E	TSXR08000E		-33° to -18° -6° to -3°	○		◎									◎	◎	◎	◎	◎		
		ø40 to ø50	ø32 to ø42	→H144	TSXR13000E																				
	Shoulder Milling / High-Feed		ø16 to ø28	ø16 to ø25	CHE	CHE2000		6° to 15° 15° 15°																	
			ø30 to ø40	ø32	CHE3000																				
		ø50 to ø80	ø32 to ø42	→H157	CHE4000																				
		ø16 to ø60	ø16 to ø42	FMS	FMS		3° to 7°																		
High-Feed		ø8.4 to ø32.3	ø16 to ø32	DMSL-E <i>new</i>	DMSL06000E(L)		-8°																		
		ø35 to ø63	ø32 to ø42	DMSW-E	DMSW08000E(L)		-6°																		
		ø16 to ø63	ø16 to ø42	MSX-E	MSX06000E MSX08000E MSX12000E MSX14000E		8°																		
Multi-purpose		ø20 to ø30	ø20 to ø25	WMM	WMM2000E/EL WMM2000ELH/EXLH		7° to 11° 7° to 11°	◎																	
		ø32 to ø40	ø32	→H185	WMM3000E/EL WMM3000ELH/EXLH																				
Radius		ø25 to ø32	ø25 to ø32	RSE-E <i>new</i>	RSE10000E		4°																		
		ø25 to ø32	ø32	→H192																					
		ø20 to ø25	ø20 to ø25	RSX-ES	RSX08000ES RSXF08000ES		10° -8° 10° -5° 10° -5°																		
		ø25 to ø32	ø25 to ø32	→H201	RSX10000ES RSXF10000ES																				
		ø32	ø32		RSX12000ES RSXF12000ES																				
		ø20 to ø25	ø20 to ø25	WRCX-E	WRCX08000E		-3° -3° to 0° -3° 0° -3° 0°																		
	ø25 to ø32	ø25 to ø32	→H206	WRCX10000E																					
	ø40 to ø50	ø32		WRCX16000E																					

*The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

©: Best ○: Suitable ✕: Unsuitable Blank: Not Recommended

Applications	Cutting Angle / Maximum Depth of Cut	Dia. (mm)	Shank Dia. (mm)	Series	Model	Insert Shape Example	Rake Angle		Application											Work Material							
							Axial	Radial	General purpose	Face Milling	High-Feed	Shoulder Milling	Groove Milling	Ramping	Chamfering	Drilling	Profiling	Profile finishing	General Steel/Carbon Steel/Alloy Steel	Tempered Steel/Die Steel	Stainless Steel	Cast Iron/Ductile Cast Iron	Non-Ferrous Metals	Aluminum Alloy	Ti Alloy/Heat-Resistant Alloy	Hardened Steel	
																											P
R/3D Profiling	20 to 47 mm 30 to 69 mm	R10 (ø20) to R25 (ø50)	ø25 to ø50.8	WBMR	WBMR2000 WBMR2000L	(2)	-10°	—																			
	0.1 to 0.4 mm	R5 (ø10) to R15 (ø30)	ø16 to ø32	WBMF	WBMF1000	(1)	0°	—																			
Side Cutters / T-Slot Cutters	9 to 22 mm 90°	ø21 to ø50	ø25 to ø32	TSE	TSE	(2)	0°	0°																			
Chamfering	45° 45°	ø8 to ø16 ø25 to ø32	ø10 to ø16 ø25 to ø32	WFXC-E	WFXC08000E WFXC12000E	(4)	0°	0°																			
	45°	ø7 to ø35	ø32	SMC	SMC	(4)	0°	0°																			
Non-Ferrous Metals	3 mm 90°	ø25 to ø50	ø20 to ø32	ANX-E	ANXS16000E	(1)	5°	-2° to 0°																			
	16 to 18 mm 22 to 24 mm 90°	ø20 to ø40 ø25 to ø40	ø20 to ø32 ø25 to ø32	WAX-E	WAX3000E WAX3000EL WAX4000E WAX4000EL	(2)	19° to 25°	6°																			

*The number of cutting edges may vary depending on the insert size, etc. Refer to each product page for details.

Milling
Cutters

Face Milling

Shoulder
Milling

High-Feed

Multi-
purpose

Radius

Radial/3D
Profiling

Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous
Metals

Cast Iron,
High-Speed

Grades for Milling

Milling Cutters
Face Milling
Shoulder Milling
High-Feed
Multi-purpose
Radius
Radial/3D Profiling
Side Cutters
T-Slot Cutters
Chamfering
Non-Ferrous Metals
Cast Iron, High-Speed

Work Material	P General Steel (Carbon Steel, Alloy Steel), Mild Steel					M Stainless Steel					K Cast Iron						
	Classification					Classification					Classification						
	Wear Resistance	Fracture Resistance				Wear Resistance	Fracture Resistance				Wear Resistance	Fracture Resistance					
	—	P01	P10	P20	P30	P40	—	M01	M10	M20	M30	M40	—	K01	K10	K20	K30
Coated Carbide																	
Cermet																	
Cemented Carbide																	
Uncoated CBN Coated CBN																	
Coated Carbide																	
Cemented Carbide																	
Uncoated CBN																	
PCD																	
Coated Carbide																	
Cemented Carbide																	
Uncoated CBN																	
PCD																	

Grades for Milling / Characteristic Values



Work Material	Grade	Hardness (HRA)	TRS (GPa)	Coating type	Coating Thickness (µm)	Features	Old Grade
P Steel	ACP100	89.3	3.1	Super FF Coat	6	· For high-speed machining of steel · Grade emphasising wear resistance for high-speed cutting	AC230
	ACP2000	89.5	3.2	ABSOTECH	10	· For high-speed machining of steel · Stable long tool life in high-speed machining is realised by adopting a tough carbide substrate and a new coating with excellent thermal crack resistance	ACP100
	XCU2500	89.5	3.2	ABSOTECH X	6	· General-purpose grade for a wide variety of materials such as steel, cast iron and stainless steel · New coating combining wear and fracture resistance realises long tool life in medium-speed to high-speed machining	—
M Stainless Steel	ACM200	89.8	3.4	Super FF Coat	6	· For machining high-hardness stainless steel · Adopts a newly developed high-strength carbide substrate with excellent wear resistance and thermal resistance, realizing outstanding stability when machining hardened stainless steel	AC230
K Cast Iron	ACK100	92.0	2.4	Super FF Coat	6	· For high-speed cast iron milling · Adopts a high-hardness substrate with high wear resistance	—
	ACK200	91.7	2.5	Super FF Coat	6	· For high-speed cast iron milling · Adopts a tough carbide substrate with excellent wear resistance and thermal crack resistance	AC211
	ACK2000	91.7	3.1	ABSOTECH	10	· For high-speed cast iron milling · Stable long tool life in high-speed machining is realised by adopting a tough carbide substrate and a new coating with excellent thermal resistance	ACK100 ACK200
	XCK2000	91.7	2.5	ABSOTECH X	6	· For high-speed cast iron milling · Along with a high-hardness carbide substrate, the new coating combining wear and fracture resistance realises superb long tool life in medium-speed to high-speed machining	—
S Exotic Alloy	XCS2000	89.8	3.4	ABSOTECH X	4	· For high-speed machining of exotic alloys · New coating combining wear and fracture resistance realises overwhelming long tool life in medium-speed to high-speed machining	—



Work Material	Grade	Hardness (HRA)	TRS (GPa)	Coating type	Coating Thickness (µm)	Features	Old Grade
P Steel	ACU2500	91.6	3.8	ABSOTECH	3	· General-purpose grade covering steel, stainless steel, and cast iron machining · Adopts a carbide substrate with excellent fracture resistance and wear resistance, plus a new coating with excellent wear resistance and chipping resistance, realising stable long tool life on various work materials	—
	ACP200	89.5	3.2	(New) Super ZX Coat	3	· Our 1st recommended grade for steel applications · General-purpose grade with an excellent balance of wear and fracture resistance · Also suitable for machining stainless steel	ACZ330
	ACP300	89.3	3.1	(New) Super ZX Coat	3	· For interrupted machining of steel · Tough grade with an emphasis on fracture resistance · Also suitable for interrupted machining of stainless steel	ACZ350
	ACP3000	89.5	3.2	ABSOTECH	3	· Our 1st recommended grade for milling steel · Carbide substrate with excellent thermal crack resistance, plus a new coating with excellent wear resistance and chipping resistance, realises stable long tool life over a wide range of cutting conditions	ACP200 ACP300
M Stainless Steel	ACM100	91.4	3.3	(New) Super ZX Coat	3	· For high-speed machining of stainless steel · Adopts high-hardness micro-grained carbide substrate and super multi-layered coating to realise outstanding wear resistance	ACZ310
	ACM300	89.8	3.4	(New) Super ZX Coat	3	· Our 1st recommended grade for milling stainless steel · Adopts a high-strength carbide substrate and super multi-layered coating for next-level wear resistance and fracture resistance	—
K Cast Iron	ACK300	91.4	3.3	(New) Super ZX Coat	3	· General-purpose grade with an excellent balance of wear and fracture resistance	ACZ310
	ACK3000	91.7	3.1	ABSOTECH	3	· Our 1st recommended grade for milling cast iron · Adopts a high thermal conductivity carbide substrate and a new coating with excellent wear resistance and chipping resistance, realizing stable long tool life over a wide range of cast iron machining operations	ACK300
N Non-Ferrous Metal	DL1000	92.9	2.1	AURORA Coat (DLC)	0.5	· Grade for milling non-ferrous metal, utilising DLC coat with a low coefficient of friction and excellent adhesion resistance	—
	DL2000	91.6	3.8	AURORA Coat (DLC)	0.5	· Grade for milling non-ferrous metal, utilising DLC coat with a low coefficient of friction and excellent adhesion resistance	—
S Exotic Alloy	ACS2500	90.8	4.2	ABSOTECH	3	· First recommendation for titanium alloy applications · Carbide substrate with excellent wear and adhesion resistance, coupled with a chipping-resistant coating, balances excellent wear and fracture resistance	ACZ310
	ACS3000	89.8	3.4	ABSOTECH	3	· Suitable for a wide range of exotic alloy machining applications · Realises superb stability due to a high-toughness carbide substrate with a highly chipping-resistant coating	—



Work Material	Grade	Hardness (HRA)	TRS (GPa)	Coating type	Coating Thickness (µm)	Features	Old Grade
P Steel	T250A	91.4	2.1	—	—	· For finishing of steel and stainless steel · Tough grade with enhanced crack development resistance	—
	T2500A	91.8	2.4	—	—	· For finishing of steel and stainless steel · Fine, uniform grain structure greatly improves toughness, realising long tool life and excellent surface finishes	T250A
M Stainless Steel	T4500A	91.0	2.3	—	—	· For finishing of steel and stainless steel · Tough grade with excellent fracture resistance and reduced thermal cracking	—



Work Material	Grade	Binder	CBN Content (%)	Grain Size (µm)	Hardness HV (GPa)	TRS (GPa)	TIAlN	Coating Thickness (µm)	Features
K Cast Iron	BN7125	Co Compound	90 to 95	2	41 to 44	1.9 to 2.0	-	-	General-purpose grade with excellent wear resistance, fracture resistance, and thermal shock resistance, suitable for machining of cast iron and exotic alloys
	BNS8125	Al Alloy	85 to 90	8	39 to 42	0.95 to 1.15	-	-	Grade with 100% solid CBN structure that exhibits excellent wear and fracture resistance
	BNC8115	Al Alloy	85 to 90	8	39 to 42	0.95 to 1.15	TIAlN	2	Grade with 100% solid CBN structure, using PVD coating with excellent wear resistance to enable roughing operations.
	BN500	TiC	65 to 70	6	32 to 34	1.0 to 1.1	-	-	Grade optimised for cast iron cutting. Provides superior wear and fracture resistance.
H Hardened Steel	BN350	TiN	60 to 65	1	33 to 35	1.5 to 1.6	-	-	Grade with the highest cutting edge strength, suitable for heavy interrupted cutting.
	BN2000	TiN	50 to 55	2	31 to 34	1.1 to 1.2	-	-	General-purpose grade for hardened steel machining with a high degree of fracture and wear resistance.



Work Material	Grade	Binder	CBN Content (%)	Grain Size (µm)	Hardness HK (GPa)	TRS (GPa)	Features
N Non-Ferrous Metal	DA1000	Co	90 to 95	up to 0.5	50 to 60	≈ 2.60	High-density sintered material made of ultra-fine grain diamond that exhibits optimum wear and fracture resistance as well as excellent edge sharpness.



A30



A36

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

XCS2000/ACS2500/ACS3000

■ Features of XCS2000

- Uses the revolutionary ABSOTECH X coating, combining the wear resistance of conventional CVD coatings and fracture resistance equivalent to that of PVD coatings.
- Realises amazing long tool life in machining of exotic alloys.

■ Features of ACS2500 and ACS3000

- Uses ABSOTECH, a new coating with excellent wear and chipping resistance.
- Its carbide substrate, with excellent fracture and wear resistance, achieves the ultimate in stable long tool life for milling of exotic alloys.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling


Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

ABSOTECH X CVD

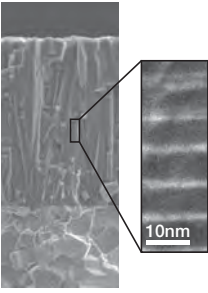


Pure cubic crystal AlTiN with high Al content: With proprietary structural control technology, differently composed layers of AlTiN are stacked at the nanometre level. With a high-Al composition containing over 80% Al on average, it also maintains a cubic crystalline structure to achieve excellent thermal resistance and high hardness. Vastly improved wear resistance.

Special Surface Treatment: Proprietary surface treatment introduces high compression stress to the coating, suppressing the development of cracks. Greatly improved fracture and thermal crack resistance.

Applicable Grades: XCS2000

ABSOTECH PVD

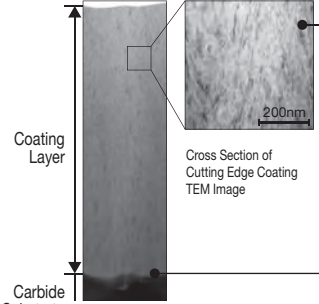


Ultra-fine Grained B Additive New AlTiBN coating, with an ultra-fine coating structure, achieves high strength and toughness. Outstanding chipping and wear resistance.

High Adhesion Strength Significantly improved coating adhesion has more than twice the chipping resistance of conventional coatings.


Applicable Grades: ACS2500, ACS3000

■ Application Range


S Heat-Resistant Alloy

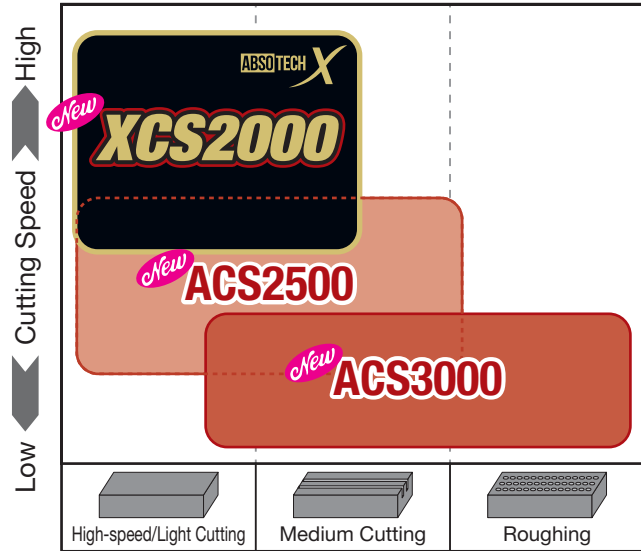

S Titanium Alloy


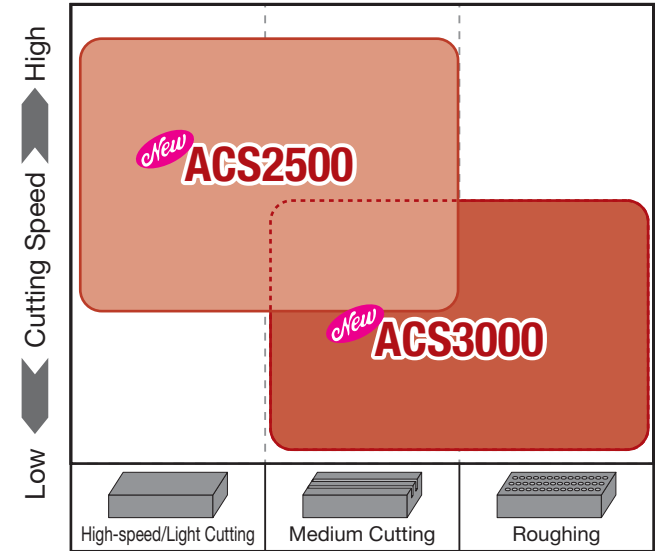


M Stainless Steel




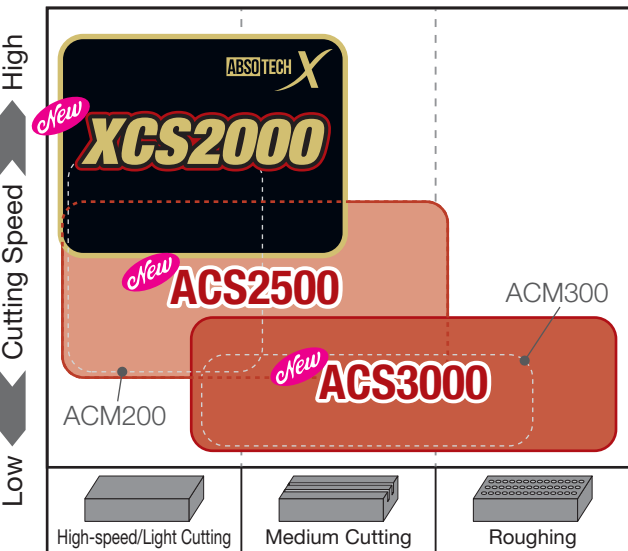


XCS2000/ACS2500/ACS3000

Application Examples (XCS2000)

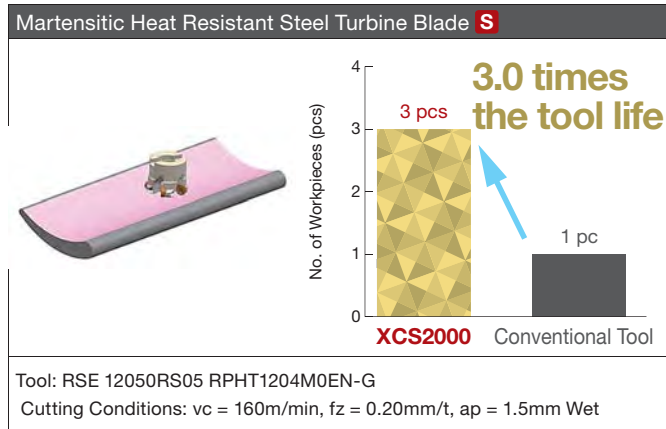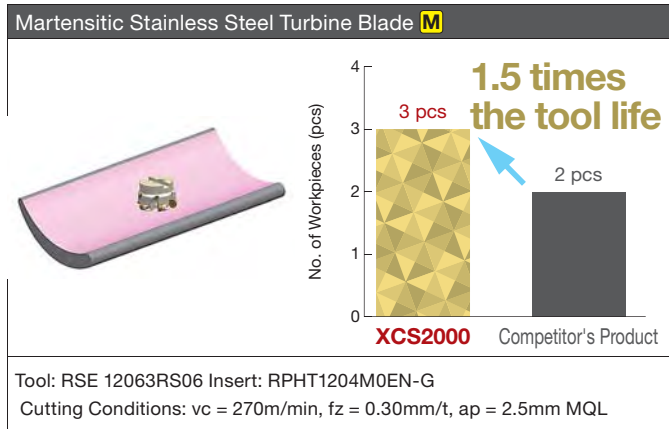

Application Examples (ACS2500/ACS3000)

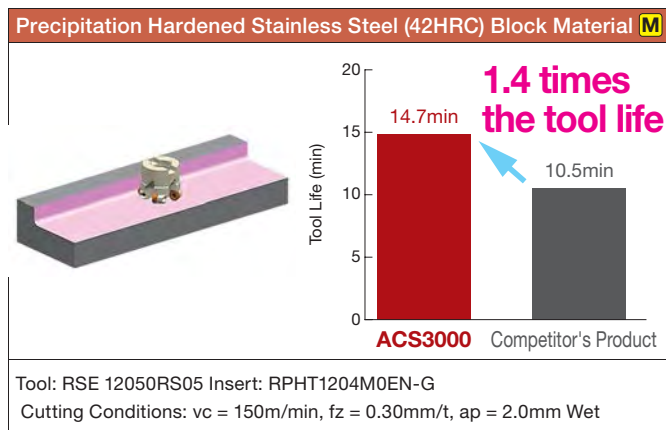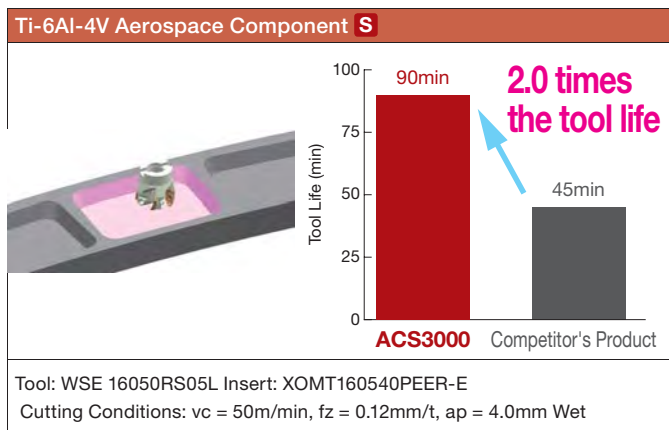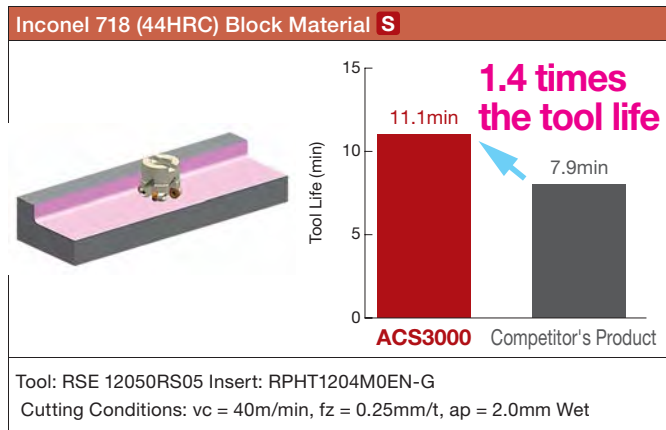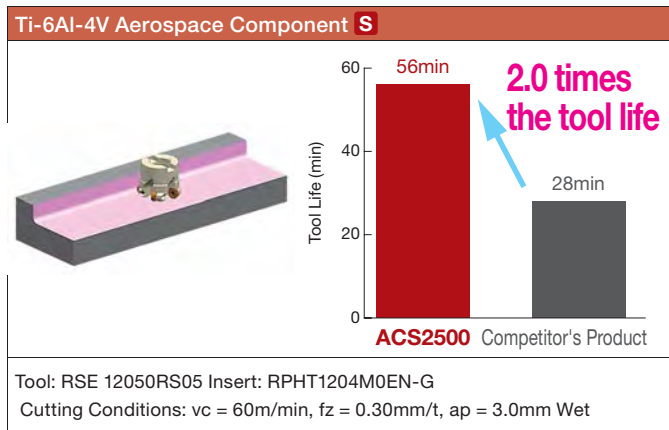

Milling Cutters



Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Cutter Identification Code

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Standard Cutters

DFC (F) 09 050 R (S)

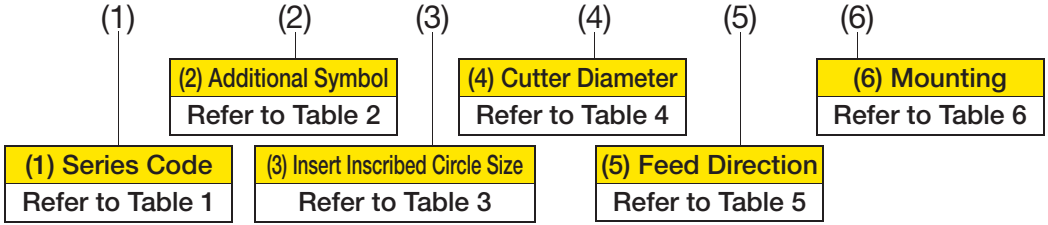


Table 1: (1) Series Code

Representative example

DFC
DGC
WGX
WGC
UFO
FPG
EHG
DNX
APG
WRCX
MSX
PWC
PWS
WFX
WEX
TSX

Table 2: (2) Additional Symbol

Fine-pitch Design	
M	Fine Pitch
F	Extra Fine Pitch

Table 3 (3) Insert Incribed Circle Size

Inch	Inscribed Circle Dimensions (mm)
3	9.525
4	12.70
5	15.875
6	20.0
Millimetre	Inscribed Circle Dimensions (mm)
12	12.7
13	13.5
14	14.0
16	16.0
20	20.0

Inscribed Circle Example



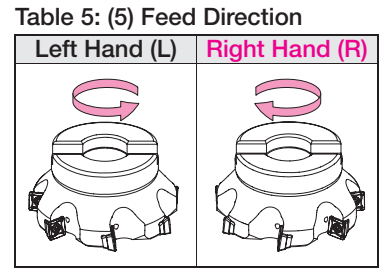


Table 6: (6) Mounting

Mounting	
S	Metric Bore

Milling Cutters (Special Purpose)

DPV (Z) 4 100 (Q) R

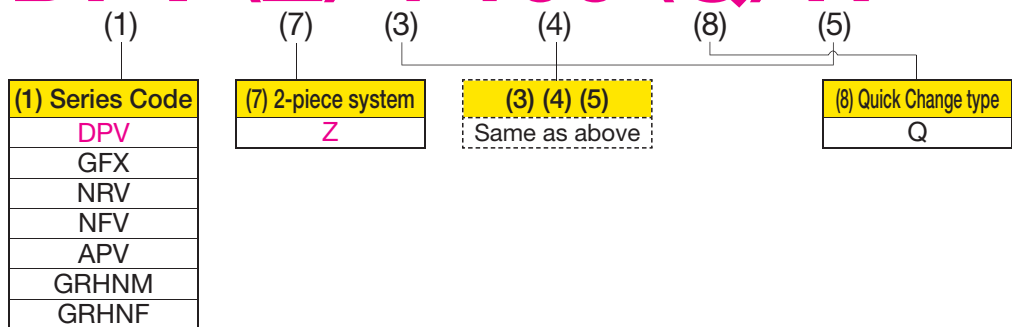

Insert Identification Code

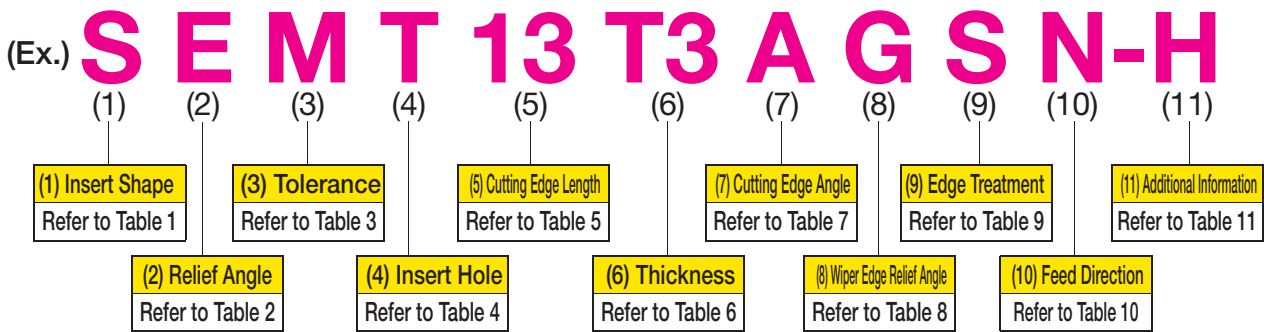


Table 1: (1) Insert Shape

Symbol	Insert Shape	Apex Angle
A	Parallelogram type	85°
H	Hexagonal type	120°
L	Rectangular type	90°
O	Octagonal type	135°
P	Pentagonal type	108°
R	Round type	—
S	Square type	90°
T	Triangular type	60°
Q	Special	—
X	Special	—

Table 2: (2) Relief Angle

Symbol	Relief Angle
N	0°
A	3°
B	5°
C	7°
P	11°
D	15°
E	20°
F	25°
G	30°
O	Special

Table 3: (3) Tolerance

Symbol	Inscribed Circle (mm)	Thickness (mm)
A	±0.025	±0.025
C	±0.025	±0.025
E	±0.025	±0.025
G	±0.025	±0.13
K	±0.05 to ±0.15	±0.025
M	±0.05 to ±0.15	±0.13

Table 4: (4) Insert Hole

Symbol	Shape (Cross Section)
W	
M	
R	
N	
T	

Table 5: (5) Cutting Edge Length

Shape	Cutting Edge Length (ℓ)
S	
T	
R	
H	
A	
O	

Table 6: (6) Thickness

Symbol	Thickness (mm)
02	2.38
03	3.18
T3	3.97
04	4.76
06	6.35

Table 7: (7) Cutting Edge Angle

Symbol	Cutting edge angle
A	45°
D	60°
E	75°
F	85°
H	87°
P	90°
Z	Special

Table 8 (8) Wiper Edge Relief Angle

Symbol	Relief Angle
A	3°
B	5°
C	7°
D	15°
E	20°
F	25°
G	30°
N	0°
P	11°
Z	Special

Table 9: (9) Edge Treatment

Symbol	Shape
F	
Sharp Edge	
E	
Round Honing	
T	
Negative Land	
S	
Negative Land + Round Honing	

Table 10 (10) Feed Direction

Symbol	Feed Direction
N	No
R	Right Hand
L	Left Hand

Table 11 (11) Additional Information (Ex.)

Symbol	Code Description
A	Sharp Edged
H	Strong Edged
W	Large Edge Treatment
S	For WBMR Insert Main Blade

* Exceptions

The above table does not apply to the following insert codes: SPCH42TR, SPCH42R, SPCH53TR, SPCH53R, SDKN42MT, SDKN42M, SDKN53MT, SDKN53M, SEKN42MT, SEKN42M, SEKN53MT and SEKN53M.

For example,

- although "H" and "K" indicate precision tolerances, the main cutting edges have general precision.
- "M" in this instance represents the Neutral Hand insert.
- "T" in this instance represents negative land edge treatment.
- "R" indicates the feed direction (right hand).



■ Features

SEC-WaveMill WGX series employs a unique chipbreaker design to provide lower cutting force and higher-quality surface finish than conventional tools. Lineup of insert grades and chipbreakers has been significantly expanded, and employment of the ACM series enables machining of stainless steel and exotic alloys. Also applicable to any work material, using the general-purpose grade ACU2500.



● Reduced Cutting Force

· High-rake chipbreaker designed for use with the WGX series achieves low cutting force

● High Quality

· Improved runout precision and unique wiper edge shape ensure excellent surface finish quality
· Additional edge chamfer reduces burrs and edge chipping

● Wide Ranging Product Lineup

· A wide selection of grades along with 4 types of chipbreakers and wiper inserts are available.
· Can be used for a wide variety of machining applications.

■ Insert Shape Features

● General-purpose G type Chipbreaker




1 Unique wiper edge shape for improved surface roughness

2 Large rake angle and cutting edge rake angle for improved sharpness



Optimal corner radius for high strength

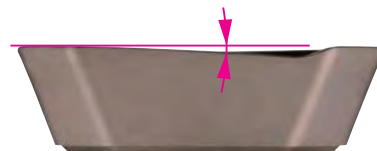


● FG type Chipbreaker with Low-Burr Design



Additional edge chamfer reduces burrs on cutting surfaces

■ Product Range

Type	Cat. No.	Description	Dia. (mm)									
			ø32	ø40	ø50	ø63	ø80	ø100	ø125	ø160	ø200	ø250
Shell	WGX13000R 	Standard Pitch					4	5	6	7	8	10
	WGX13000RS	Standard Pitch		3	3	4	4	5	6	7	8	10
	WGXM13000R 	Fine Pitch					6	7	8	10	12	14
	WGXM13000RS	Fine Pitch			4	5	6	7	8	10	12	14
	WGXF13000R 	Extra Fine Pitch					8	10	12	16	20	24
	WGXF13000RS	Extra Fine Pitch			5	6	8	10	12	16	20	24
Shank	WGX13000EW	Shank type	3	3	4	5						

Number in ● shows the number of teeth  Inch Bore
Sizes of ø125mm and below have coolant holes

For the shell type, left-handed tools can also be manufactured.



WGX 13000R(S) Standard Pitch WGXM 13000R(S) Fine Pitch




WGXF 13000R(S) Extra Fine Pitch WGX 13000EW Shank type

■ Chipbreaker Selection


Work Material	P M K S N	P M K S			P K
Applications	Light Cutting	General-purpose/ Burr Prevention	General-purpose	Heavy Cutting	Surface Finish Emphasised
Features	Low Cutting Force	Standard / With Chamfer	Standard	High Strength	Wiper
Chipbreaker	L type	FG type	G type	H type	WR type
Cutting Edge Cross Section					

■ Chipbreaker Selection Guide

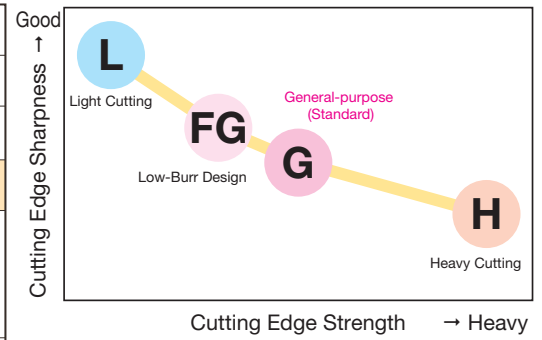


■ Cutting Performance

● Comparison of Cutting Force (G type)

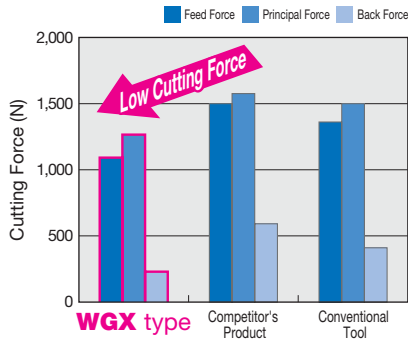


Work Material: S50C, Tool: $\phi 100$
Cutting Conditions: $vc = 200\text{m/min}$, $fz = 0.2\text{mm/t}$, $ap = 3.0\text{mm}$

● Runout with Insert Attached (G type)

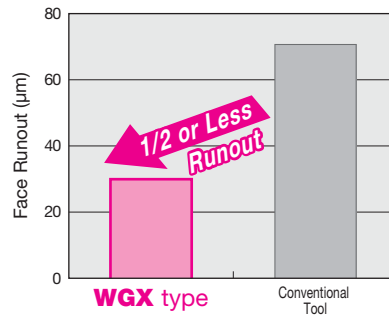



Tool: WGXM13100R ($\phi 100$)
Number of Teeth: 7

● Surface Finish Comparison (WR type)

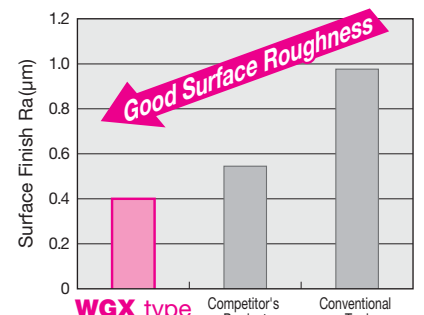

Work Material: S50C, Tool: $\phi 100$
Cutting Conditions: $vc = 200\text{m/min}$, $fz = 0.2\text{mm/t}$, $ap = 3.0\text{mm}$

● FG type Chipbreaker with Low-Burr Design

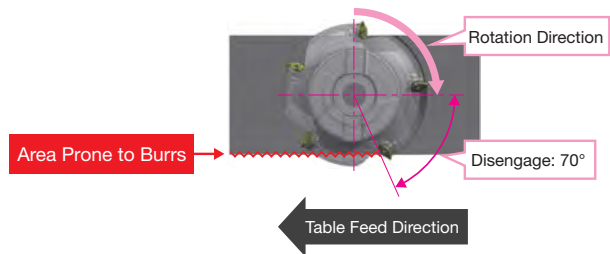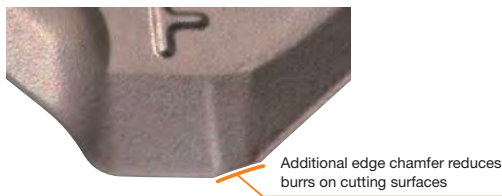


● Machined Surface Comparison

Work Material	FG type	G type	Conventional Tool	Competitor's Product
S50C				
SUS304				
SCM440				

Machine: Machining Centre BT50
Tool: WGX13100R ($\phi 100$),
Insert Grade: ACP200
Cutting Conditions:
 $vc = 200\text{m/min}$,
 $fz = 0.2\text{mm/t}$,
 $ap = 3.0\text{mm}$,
 $ae = 80\text{mm}$, Dry


■ Precautions when Using Wiper Inserts with Holes

- When mounting the wiper insert, attach it as shown in Fig 1. When mounted as shown in Fig 2, normal machined surface roughness cannot be obtained.

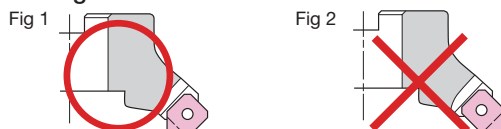

- The wiper insert has a single corner specification.
- Refer to page N19 of Technical Guidance for details about milling with wiper inserts.

WGX 13000R(S) type



Milling Cutters

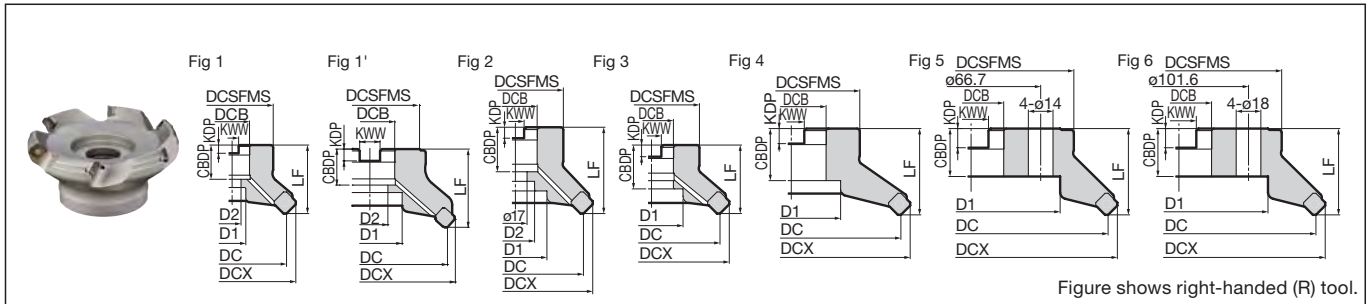


Figure shows right-handed (R) tool.

Body (Standard Pitch)

Dimensions (mm)

Cat. No.	Stock		Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
	R	L													
WGX 13040RS	●		40	52	32	40	16	8.4	5.6	18	14	9	3	0.3	1
13050RS	●		50	62	40	40	22	10.4	6.3	20	18	11	3	0.4	1
13063RS	●		63	76	50	40	22	10.4	6.3	20	18	11	4	0.6	1
13080RS	●		80	93	55	50	27	12.4	7	25	20	13.5	4	1.2	1
13100RS	●		100	113	70	50	32	14.4	8.5	32	46	—	5	1.6	3
13125RS	●		125	138	80	63	40	16.4	9.5	29	52	29	6	2.8	1*
13160RS	●		160	173	100	63	40	16.4	9.5	29	88	—	7	4.5	5
13200RS	●		200	213	130	63	60	25.7	14	35	130	—	8	7.1	6
13250RS	●		250	263	130	63	60	25.7	14	35	160	—	10	11.2	6
WGX 13080R	●		80	93	60	50	25.4	9.5	6	25	20	13	4	1.2	1
13100R	●		100	113	70	63	31.75	12.7	8	32.5	46	28	5	2.3	2
13125R	●		125	138	80	63	38.1	15.9	10	35.5	55	30	6	2.9	1
13160R	●		160	173	100	63	50.8	19.1	11	38	72	—	7	4.5	4
13200R	●		200	213	130	63	47.625	25.4	14	35	130	—	8	7.1	6
13250R	●		250	263	130	63	47.625	25.4	14	35	150	—	10	11.2	6

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter. Sizes ø160mm and above do not have coolant holes.


Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermets	Applications	Fig
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300					
Process	High-speed/Light Cutting	Medium Cutting	Roughing										
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A
SEET 13T3AGFR-L	●	●	●	●	●	●	●	●	●	●	●	●	●
13T3AGSR-L	●	●	●	●	●	●	●	●	●	●	●	●	●
13T3AGSR-G	●	●	●	●	●	●	●	●	●	●	●	●	●
SEMT 13T3AGSR-L	●	●	●	●	●	●	●	●	●	●	●	●	●
13T3AGSR-G	●	●	●	●	●	●	●	●	●	●	●	●	●
13T3AGSR-H	●	●	●	●	●	●	●	●	●	●	●	●	●
13T3AGSR-FG	●	●	●	●	●	●	●	●	●	●	●	●	●
13T3AGSL-G	●	●	●	●	●	●	●	●	●	●	●	●	●
XEEW 13T3AGER-WR	●	●	●	●	●	●	●	●	●	●	●	●	●

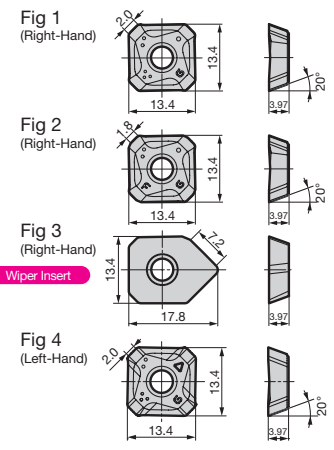


The ACP100 and ACK200 may vary in colour or lustre, but these variations do not affect the performance. Refer to H21 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Identification Code

WGX 13 040 R S

Series Code Insert Size Cutter Dia. Feed Direction Metric Bore

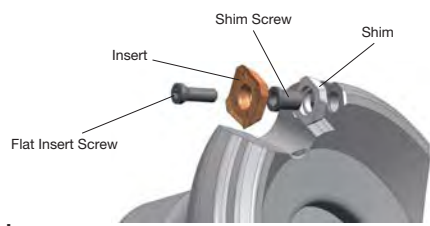

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.10-0.20-0.30	ACU2500
	Mild Steel	≤ 180HB	180-270-350	0.10-0.25-0.40	ACP200
	Die Steel	200 to 220 HB	100-150-200	0.15-0.20-0.25	XCU2500
M	Stainless Steel	—	160-210-250	0.15-0.23-0.30	ACU2500 ACM300
K	Cast Iron	250HB	100-180-250	0.15-0.23-0.30	ACU2500 ACK200 XCU2500 XCK2000
N	Non-Ferrous Alloy	—	500-750-1,000	0.15-0.23-0.30	DL1000
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	ACU2500 ACM300



Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream
						Handle Grip	Bit	
DC ø40 to 125 Other than above	WGCS13R	BW0507F	LH035	BFTX03512IP	TRDR151P	HPS1015	TRB151P	SUMI-P

Recommended Tightening Torque (N·m)

WGXM 13000R(S) type

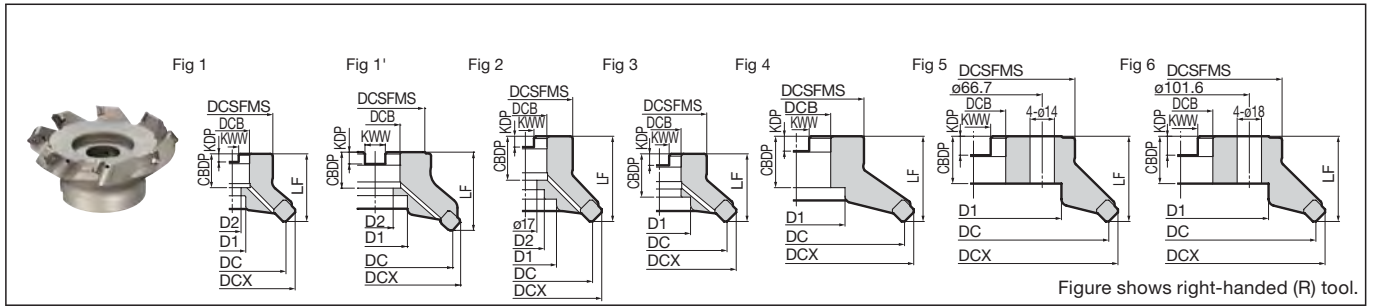

Body (Fine Pitch)

Cat. No.	Stock		Dimensions (mm)											Fig	
	R	L	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth		Weight (kg)
WGXM 13050RS	●		50	62	40	40	22	10.4	6.3	20	18	11	4	0.4	1
13063RS	●		63	76	50	40	22	10.4	6.3	20	18	11	5	0.6	1
13080RS	●		80	93	55	50	27	12.4	7	25	20	13.5	6	1.1	1
13100RS	●		100	113	70	50	32	14.4	8.5	32	46	—	7	1.6	3
13125RS	●		125	138	80	63	40	16.4	9.5	29	52	29	8	2.8	1'
13160RS	●		160	173	100	63	40	16.4	9.5	29	88	—	10	4.5	5
13200RS	●		200	213	130	63	60	25.7	14	35	130	—	12	7.0	6
13250RS	●		250	263	130	63	60	25.7	14	35	160	—	14	11.1	6
WGXM 13080R	●		80	93	60	50	25.4	9.5	6	25	20	13	6	1.1	1
13100R	●		100	113	70	63	31.75	12.7	8	32.5	46	28	7	2.2	2
13125R	●		125	138	80	63	38.1	15.9	10	35.5	55	30	8	2.9	1
13160R	●		160	173	100	63	50.8	19.1	11	38	72	—	10	4.5	4
13200R	●		200	213	130	63	47.625	25.4	14	35	130	—	12	7.0	6
13250R	●		250	263	130	63	47.625	25.4	14	35	150	—	14	11.1	6

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter. Sizes ø160mm and above do not have coolant holes.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert


Grade Classification		Coated Carbide								Cemented Carbide	DLC	Cermet	Applications		Fig		
Process	High-speed/Light Cutting												Light Cutting (For Non-Ferrous Metals)	Light Cutting	1		
	Medium Cutting															General-purpose	1
	Roughing																
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A	General-purpose	1		
SEET 13T3AGFR-L	●	●	●	●	●	●	●	●	●	●	●	●	—			Light Cutting	1
13T3AGSR-L	●	●	●	●	●	●	●	●	●	●	—	—	●	General-purpose	1		
13T3AGSR-G	●	●	●	●	●	●	●	●	●	●	—	—	●			General-purpose	1
SEMT 13T3AGSR-L	●	●	●	●	●	●	●	●	●	●	—	—	—	Heavy Cutting	1		
13T3AGSR-G	●	●	●	●	●	●	●	●	●	●	—	—	—			Low-burr Design	2
13T3AGSR-H	●	●	●	●	●	●	●	●	●	●	—	—	—	General-purpose	4		
13T3AGSR-FG	●	●	●	●	●	●	●	●	●	●	—	—	—			Wiper Insert	3
13T3AGSL-G	●	●	●	●	●	●	●	●	●	●	—	—	—	Wiper Insert	3		
XEEW 13T3AGER-WR	●	●	●	●	●	●	●	●	●	●	—	—	●			Wiper Insert	3

The ACP100 and ACK200 may vary in colour or lustre, but these variations do not affect the performance. Refer to H21 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Identification Code

WGXM 13050 R S

Series Code: WG, Fine Pitch: M, Insert Size: 13, Cutter Dia.: 050, Feed Direction: R, Metric Bore: S

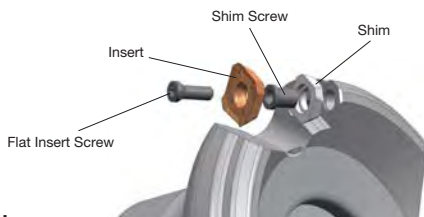

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream
DC ø50 to 125	WGCS13R	BW0507F	LH035	BFTX03512IP	3.0	Handle Grip	Bit	SUMI-P
Other than above						TRDR15IP	HPS1015	

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.10-0.20-0.30	ACU2500
	Mild Steel	≤ 180HB	180-270-350	0.10-0.25-0.40	ACP200
	Die Steel	200 to 220 HB	100-150-200	0.15-0.20-0.25	XCU2500
M	Stainless Steel	—	160-210-250	0.15-0.23-0.30	ACU2500 ACM300
K	Cast Iron	250HB	100-180-250	0.15-0.23-0.30	ACU2500 ACK200 XCU2500 XCK2000
N	Non-Ferrous Alloy	—	500-750-1,000	0.15-0.23-0.30	DL1000
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	ACU2500 ACM300

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WGXF 13000R(S) type

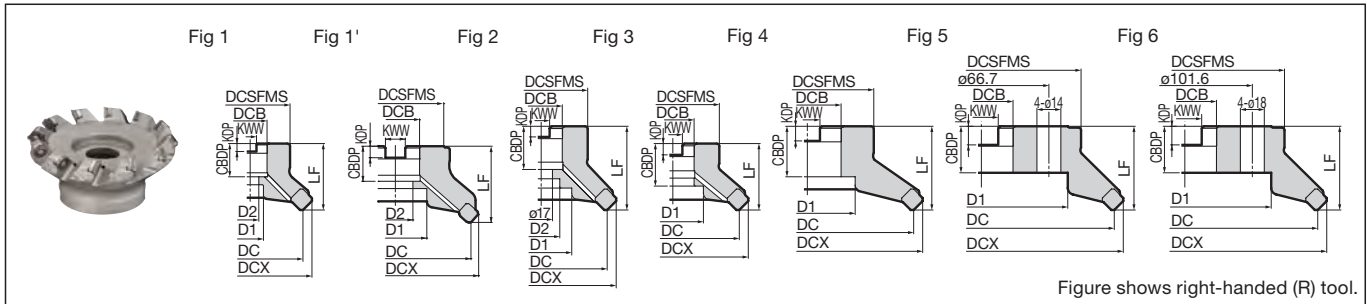



Figure shows right-handed (R) tool.

Body (Extra Fine Pitch)

Dimensions (mm)

Cat. No.	Stock		Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
	R	L													
WGXF 13050RS	●		50	62	40	40	22	10.4	6.3	20	18	11	5	0.4	1
13063RS	●		63	76	50	40	22	10.4	6.3	20	18	11	6	0.6	1
13080RS	●		80	93	55	50	27	12.4	7	25	20	13.5	8	1.1	1
13100RS	●		100	113	70	50	32	14.4	8.5	32	46	—	10	1.5	3
13125RS	●		125	138	80	63	40	16.4	9.5	29	52	29	12	2.7	1'
13160RS	●		160	173	100	63	40	16.4	9.5	29	88	—	16	4.5	5
13200RS	●		200	213	130	63	60	25.7	14	35	130	—	20	6.9	6
13250RS	●		250	263	130	63	60	25.7	14	35	160	—	24	11.0	6
WGXF 13080R	●		80	93	60	50	25.4	9.5	6	25	20	13	8	1.1	1
13100R	●		100	113	70	63	31.75	12.7	8	32.5	46	28	10	2.1	2
13125R	●		125	138	80	63	38.1	15.9	10	35.5	55	30	12	2.8	1
13160R	●		160	173	100	63	50.8	19.1	11	38	72	—	16	4.5	4
13200R	●		200	213	130	63	47.625	25.4	14	35	130	—	20	6.9	6
13250R	●		250	263	130	63	47.625	25.4	14	35	150	—	24	11.0	6

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter. Sizes ø160mm and above do not have coolant holes.


Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert


Dimensions (mm)

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet	Applications	Fig				
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300			ACM200	ACM300	H1	DL1000
Process	High-speed/Light Cutting	Medium Cutting	Roughing														
Cat. No.																	
SEET 13T3AGFR-L	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Light Cutting (For Non-Ferrous Metals)	1
13T3AGSR-L	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Light Cutting	1
13T3AGSR-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	General-purpose	1
SEMT 13T3AGSR-L	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Light Cutting	1
13T3AGSR-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	General-purpose	1
13T3AGSR-H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Heavy Cutting	1
13T3AGSR-FG	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Low-burr Design	2
13T3AGSL-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	General-purpose	4
XEEW 13T3AGER-WR	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	Wiper Insert	3

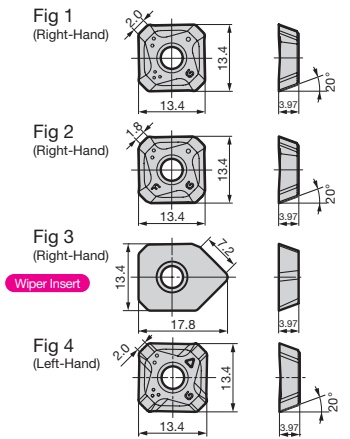

The ACP100 and ACK200 may vary in colour or lustre, but these variations do not affect the performance. Refer to H21 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Identification Code

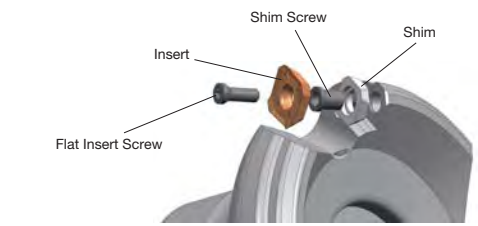

Parts



Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream
DC ø50 to 125 Other than above	WGCS13R	BW0507F	LH035	BFTX03512IP	N·m 3.0	Handle Grip	Bit	SUMI-P
						TRDR15IP	—	

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.10-0.20-0.30	ACU2500
	Mild Steel	≤ 180HB	180-270-350	0.10-0.25-0.40	ACP200
	Die Steel	200 to 220 HB	100-150-200	0.15-0.20-0.25	XCU2500
M	Stainless Steel	—	160-210-250	0.15-0.23-0.30	ACU2500 ACM300
K	Cast Iron	250HB	100-180-250	0.15-0.23-0.30	ACU2500 ACK200 XCU2500 XCK2000
N	Non-Ferrous Alloy	—	500-750-1,000	0.15-0.23-0.30	DL1000
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	ACU2500 ACM300

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WGX 13000EW type

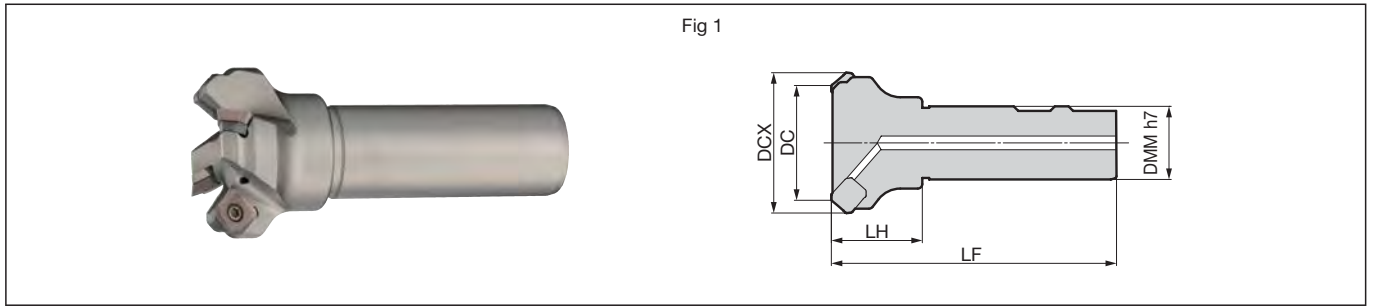


Body (Shank type)

								Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Fig	
WGX 13032EW	●	32	44	32	40	125	3	1	
13040EW	●	40	52	32	40	125	3	1	
13050EW	●	50	62	32	40	125	4	1	
13063EW	●	63	76	32	40	125	5	1	

Inserts are sold separately. ø32mm size does not have shims.

Insert


Grade Classification	Coated Carbide										Cemented Carbide	DLC	Cermet			
	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	Cemented Carbide	DLC	Cermet		
Process	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	Cemented Carbide	DLC	Cermet		
	Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting	Medium Cutting	Cemented Carbide	DLC	Cermet		
	Roughing	Roughing	Roughing	Roughing	Roughing	Roughing	Roughing	Roughing	Roughing	Roughing	Roughing	Cemented Carbide	DLC	Cermet		
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	ACK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A	Applications	Fig	
SEET 13T3AGFR-L	●	●	●	●	●	●	●	●	●	●	●	●	●	Light Cutting (For Non-Ferrous Metals)	1	
13T3AGSR-L	●	●	●	●	●	●	●	●	●	●	●	●	●	Light Cutting	1	
13T3AGSR-G	●	●	●	●	●	●	●	●	●	●	●	●	●	General-purpose	1	
SEMT 13T3AGSR-L	●	●	●	●	●	●	●	●	●	●	●	●	●	Light Cutting	1	
13T3AGSR-G	●	●	●	●	●	●	●	●	●	●	●	●	●	General-purpose	1	
13T3AGSR-H	●	●	●	●	●	●	●	●	●	●	●	●	●	Heavy Cutting	1	
13T3AGSR-FG	●	●	●	●	●	●	●	●	●	●	●	●	●	Low-burr Design	2	
XEEW 13T3AGER-WR	●	●	●	●	●	●	●	●	●	●	●	●	●	Wiper Insert	3	

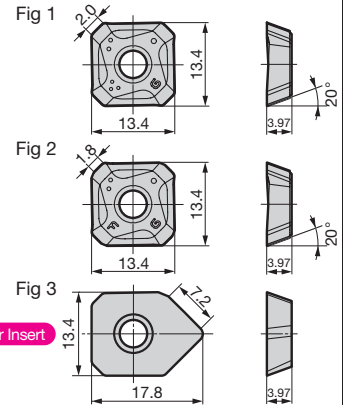

The ACP100 and ACK200 may vary in colour or lustre, but these variations do not affect the performance. Refer to H21 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Identification Code

WGX **13** **032** **EW**
 Series Code Insert Size Cutter Dia. Shank type

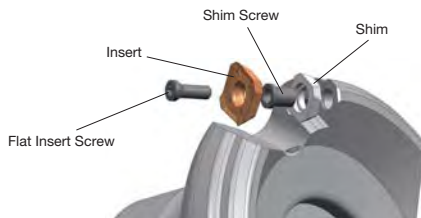

Recommended Cutting Conditions


ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.10-0.20-0.30	ACU2500
	Mild Steel	≤ 180HB	180-270-350	0.10-0.25-0.40	ACP200
	Die Steel	200 to 220 HB	100-150-200	0.15-0.20-0.25	XCU2500
M	Stainless Steel	—	160-210-250	0.15-0.23-0.30	ACU2500 ACM300
K	Cast Iron	250HB	100-180-250	0.15-0.23-0.30	ACU2500 ACK200 XCU2500 XCK2000
N	Non-Ferrous Alloy	—	500-750-1,000	0.15-0.23-0.30	DL1000
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	ACU2500 ACM300

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Wrench	Anti-seizure Cream
WGX13032EW type	—	—	—	BFTX03512IP	3.0	TRDR15IP
Other than above	WGCS13R	BW0507F	LH035	—	—	SUMI-P

WGC 3000R(S) type



Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

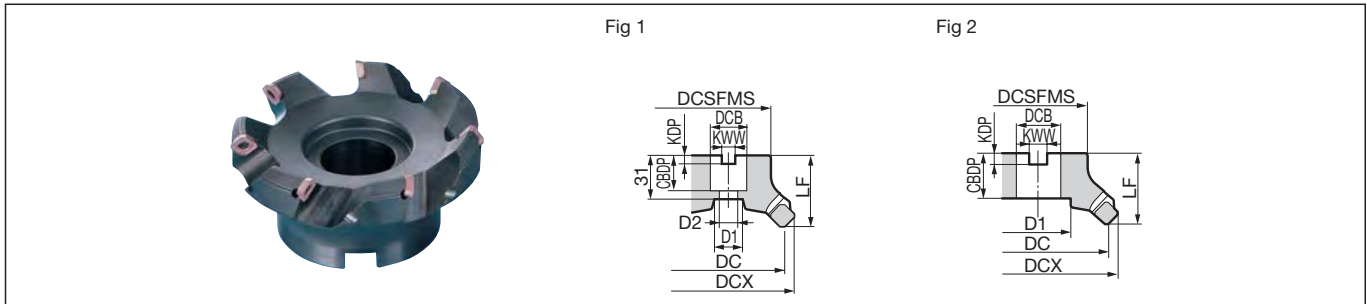

Body


Cat. No.		Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	WGC 3032RS	●	32	41	32	40	16	8.4	5.6	18	14	9	4	—	1
	3040RS	●	40	49	32	40	16	8.4	5.6	18	14	9	4	—	1
	3050RS	●	50	59	40	40	22	10.4	6.3	20	18	11	5	—	1
	3063RS	●	63	72	50	40	22	10.4	6.3	20	18	11	6	—	1
Inch	WGC 3080R	●	80	89	60	50	25.4	9.5	6	25	20	13	6	1.1	1
	3100R	●	100	109	70	50	31.75	12.7	8	32	46	—	7	1.5	2

Inserts are sold separately.


Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert

Grade Classification		Coated Carbide			DLC	Cemented Carbide			Cermet	SUMIDIA		Fig	
Process	High-speed/Light Cutting	P		K	N			K		N	N		
	General-purpose	P	M	K	N	P	S		P	N	N		
	Roughing	P	M	K	N					N	N		
Cat. No.		ACP100	ACP200	ACP300	ACK200	ACK300	DL1000	A30N	EH520	H1	T250A	DA1000	DA2200
SEET 0903AGFN-L		●	●	●	●	●	●			●			
0903AGSN-G		●	●	●	●	●	●		●		●		
0903AGSN-N		●	●	●	●	●	●				●		
SEMT 0903AGSN-L		●	●	●	●	●	●						
0903AGSN-G		●	●	●	●	●	●	●					

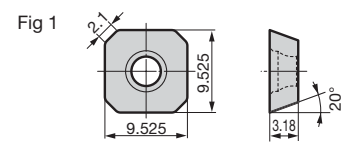

Refer to H21 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

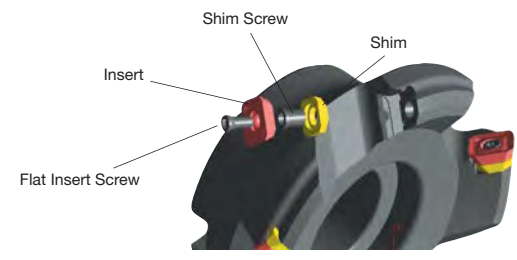

Recommended Cutting Conditions



WGC3000RS type							
ISO	Work		Cutting Speed vc (m/min)		Feed Rate fz (mm/t)	Insert Grade	
	Material	Hardness	Min.	Optimum - Max.			
P	General Steel	180 to 280HB	150-200	250	0.10-0.15	0.20	ACP200
	Mild Steel	≤ 180HB	180-250	350	0.10-0.18	0.25	ACP200
	Die Steel	200 to 220HB	100-150	200	0.15-0.18	0.20	ACP200
M	Stainless Steel	—	160-200	250	0.15-0.18	0.20	ACP300
K	Cast Iron	250HB	100-200	250	0.15-0.18	0.20	ACK200
N	Non-Ferrous Alloy	—	300-500	1,000	0.15-0.18	0.20	DL1000
S	Exotic Alloy	—	30-50	80	0.10-0.20	0.30	EH520

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Flat Insert Screw		Detachable Wrench		Anti-seizure Cream
		Handle Grip	Bit	
BFTX0307IP	2.0	HPS1015	TRB10IP	SUMI-P

WGC(F) 4000R(S) type

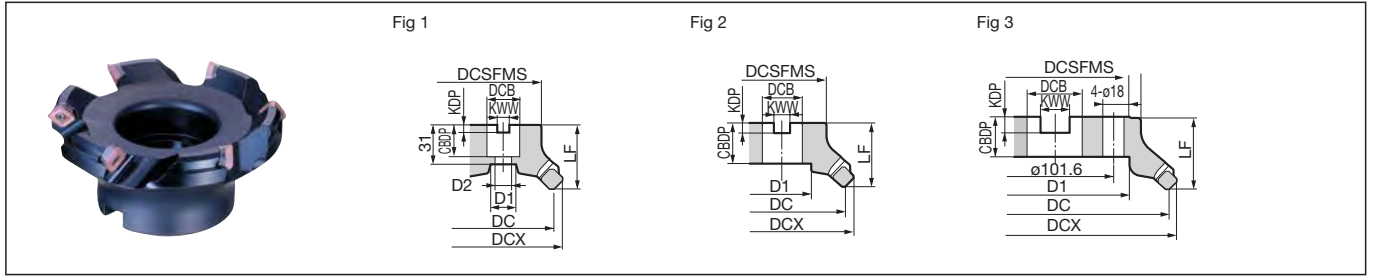

Body (Standard Pitch)

Cat. No.		Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	WGC 4040RS	●	40	52	32	40	16	8.4	5.6	18	14	9	3	—	1
	4050RS	●	50	62	40	40	22	10.4	6.3	20	18	11	3	—	1
	4063RS	●	63	76	50	40	22	10.4	6.3	20	18	11	4	—	1
Inch	WGC 4080R	●	80	93	60	50	25.4	9.5	6	25	20	13	4	1	1
	4100R	●	100	113	70	50	31.75	12.7	8	32	46	—	5	1.5	2
	4125R	●	125	138	80	63	38.1	15.9	10	38	56	—	6	2.6	2
	4160R	●	160	173	100	63	50.8	19.1	11	38	72	—	7	4	2
	4200R	●	200	213	130	63	47.625	25.4	14	35	130	—	8	6.6	3

Body (Extra Fine Pitch)

Cat. No.		Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	WGCF 4050RS	●	50	62	40	40	22	10.4	6.3	20	18	11	5	—	1
	4063RS	●	63	76	50	40	22	10.4	6.3	20	18	11	6	—	1
Inch	WGCF 4080R	●	80	93	60	50	25.4	9.5	6	25	20	13	8	1	1
	4100R	●	100	113	70	50	31.75	12.7	8	32	46	—	10	1.5	2
	4125R	●	125	138	80	63	38.1	15.9	10	38	56	—	12	2.6	2
	4160R	●	160	173	100	63	50.8	19.1	11	38	72	—	16	4	2
	4200R	●	200	213	130	63	47.625	25.4	14	35	130	—	20	6.6	3


Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide	DLC	Cemented Carbide	Cermet	SUMIDIA	Fig							
Process	High-speed/Light Cutting	P	K	N	NS	N	N							
	General-purpose	P	K	N	NS	N	N							
	Roughing	P	K	N	NS	N	N							
Cat. No.		ACP100	ACP200	ACP300	ACK200	ACK300	DL1000	A30N	EH520	H1	T250A	DA1000	DA2200	Fig
SEET 13T3AGFN-L		●	●	●	●	●	●	●	●	●	—	—	—	1
13T3AGSN-G		●	●	●	●	●	—	●	●	●	—	—	—	1
13T3AGSN-N		●	●	●	●	●	—	—	—	—	—	—	—	1
SEMT 13T3AGSN-L		●	●	●	●	●	—	—	—	—	—	—	—	1
13T3AGSN-G		●	●	●	●	●	—	—	—	—	—	—	—	1
13T3AGSN-H		●	●	●	●	●	—	—	—	—	—	—	—	1
NF-SECW 13T3AGTN-N		—	—	—	—	—	—	—	—	—	—	●	▲	1
NF-XEEW 13T3AGFR-W		—	—	—	—	—	—	—	—	—	—	●	▲	2
XEEW 13T3AGER-W		—	—	—	—	●	—	—	—	—	—	—	—	2

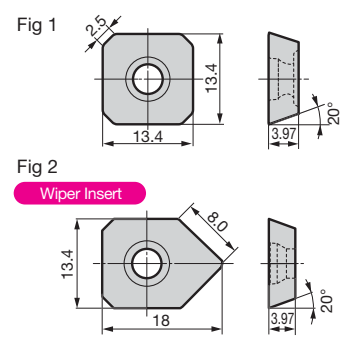

Refer to H21 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Recommended Cutting Conditions for WGC4000RS/WGCF4000RS type

ISO	Work Material	Hardness	Cutting Speed vc (m/min)	Feed Rate fz (mm/t)	Insert Grade
P	General Steel	180 to 280HB	150-200-250	0.10-0.20-0.30	ACP200
	Mild Steel	≤ 180HB	180-250-350	0.10-0.25-0.40	ACP200
	Die Steel	200 to 220HB	100-150-200	0.15-0.20-0.25	ACP200
M	Stainless Steel	—	160-200-250	0.15-0.23-0.30	ACP300
K	Cast Iron	250HB	100-200-250	0.15-0.23-0.30	ACK200
N	Non-Ferrous Alloy	—	300-500-1,000	0.15-0.18-0.20	DL1000
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	EH520

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream
						Handle Grip	Bit	
WGC(F) 4080R to WGC(F) 4125R	WGCS13R	BW0507F	LH035	BFTX03512IP	3.0	HPS1015	TRB15IP	SUMI-P
WGC(F) 4160R to WGC(F) 4200R	WGCS13R	BW0507F	LH035	BFTX03512IP	3.0	TRDR15IP	—	
WGC 4000RS to WGCF 4000RS	WGCS13R	BW0507F	LH035	BFTX03512IP	3.0	HPS1015	TRB15IP	


Note Recommended tightening torque (N·m) ▲ mark: To be replaced by a new product, made to order, or discontinued (please confirm stock availability)

Milling Cutters
Face Milling
Shoulder Milling
High-Feed
Multi-purpose
Radius
Radial/3D Profiling
Side Cutters
Chamfering
Non-Ferrous Metals
Cast Iron, High-Speed

WGC 3000EW/4000EW type



Rake Angle	Radial	-10° to -19°	-20° to -24°	4mm	45°	6mm	45°	
	Axial	20°	20° to 22°	(3000 type)	(4000 type)	(3000 type)	(4000 type)	

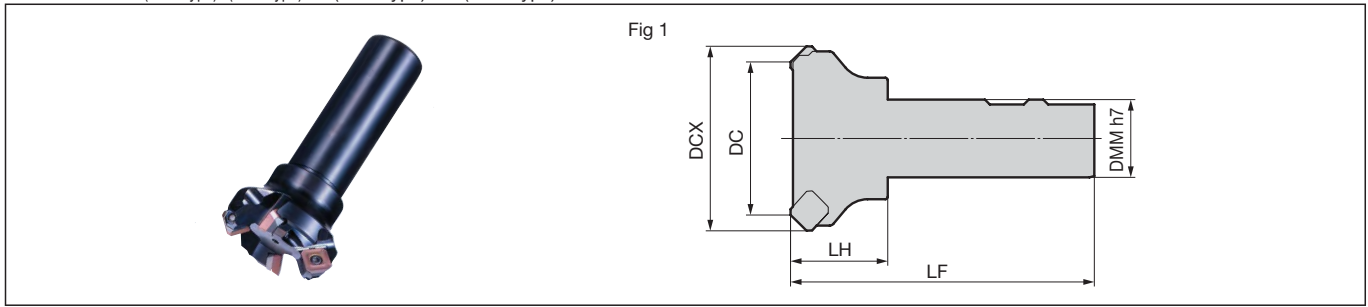

Body (Shank type) Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Fig
WGC 3020EW	●	20	29	20	40	100	2	1
3025EW	●	25	34	20	40	100	3	1
3032EW	●	32	41	32	40	125	4	1
3040EW	●	40	49	32	40	125	4	1
3050EW	●	50	59	32	40	125	5	1
3063EW	●	63	72	32	40	125	6	1


Body (Shank type) Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Fig
WGC 4032EW	●	32	44	32	40	125	3	1
4040EW	●	40	52	32	40	125	3	1
4050EW	●	50	62	32	40	125	4	1
4063EW	●	63	76	32	40	125	5	1

Inserts are sold separately.

Insert

Grade Classification	Coated Carbide		DLC	Cemented Carbide		Cermet	SUMIDIA							
	P	M	K	N	PS	K	N	N						
Process	High-speed/Light Cutting													
	General-purpose													
	Roughing													
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	DL1000	A30N	EH520	H1	T250A	DA1000	DA2200	Applicable Cutter	Fig
SEET 0903AGFN-L	●	●	●	●	●	●	●	●	●	●	—	—	WGC3000 type	1
0903AGSN-G	●	●	●	●	●	—	—	—	—	—	—	—		1
0903AGSN-N	●	●	●	●	●	—	—	—	—	—	—	—		1
SEMT 0903AGSN-L	●	●	●	●	●	—	●	—	—	—	—	—	WGC4000 type	2
0903AGSN-G	●	●	●	●	●	—	—	—	—	—	—	—		1
SEET 13T3AGFN-L	●	●	●	●	●	—	—	—	—	—	—	—		2
13T3AGSN-G	●	●	●	●	●	—	—	—	—	—	—	—	WGC4000 type	2
13T3AGSN-N	●	●	●	●	●	—	—	—	—	—	—	—		2
SEMT 13T3AGSN-L	●	●	●	●	●	—	—	—	—	—	—	—		WGC4000 type
13T3AGSN-G	●	●	●	●	●	—	—	—	—	—	—	—	2	
13T3AGSN-H	●	●	●	●	●	—	—	—	—	—	—	—	2	
NF-SECW 13T3AGTN-N	—	—	—	—	—	—	—	—	—	—	●	▲	2	
NF-XEEW 13T3AGFR-W	—	—	—	—	—	—	—	—	—	—	●	▲	3	
XEEW 13T3AGER-W	—	—	—	—	—	—	—	—	—	—	—	—	3	

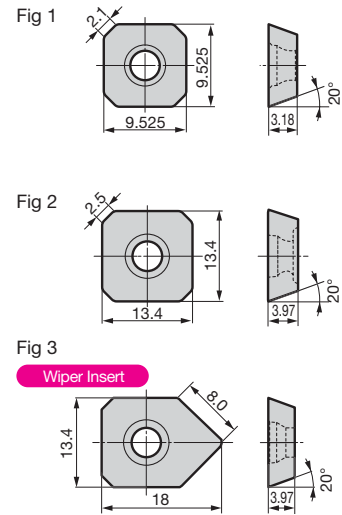

Refer to H21 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Recommended Cutting Conditions

WGC3000EW type

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280HB	150-200-250	0.10-0.15-0.20	ACP200
	Mild Steel	≤ 180HB	180-250-350	0.10-0.18-0.25	ACP200
	Die Steel	200 to 220HB	100-150-200	0.15-0.18-0.20	ACP200
M	Stainless Steel	—	160-200-250	0.15-0.18-0.20	ACP300
K	Cast Iron	250HB	100-200-250	0.15-0.18-0.20	ACK200
N	Non-Ferrous Alloy	—	300-500-1,000	0.15-0.18-0.20	DL1000
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	EH520

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WGC4000EW type


ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280HB	150-200-250	0.10-0.20-0.30	ACP200
	Mild Steel	≤ 180HB	180-250-350	0.10-0.25-0.40	ACP200
	Die Steel	200 to 220HB	100-150-200	0.15-0.20-0.25	ACP200
M	Stainless Steel	—	160-200-250	0.15-0.23-0.30	ACP300
K	Cast Iron	250HB	100-200-250	0.15-0.23-0.30	ACK200
N	Non-Ferrous Alloy	—	300-500-1,000	0.15-0.18-0.20	DL1000
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	EH520

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Wrench	Anti-seizure Cream
WGC 3000EW	—	—	—	BFTX0307IP	2.0	TRDR10IP
WGC 4032EW	—	—	—	BFTX03512IP	3.0	TRDR15IP
WGC 4000EW (Except WGC 4032EW)	WGCS13R	BW0507F	LH035	BFTX03512IP	3.0	TRDR15IP

MEMO

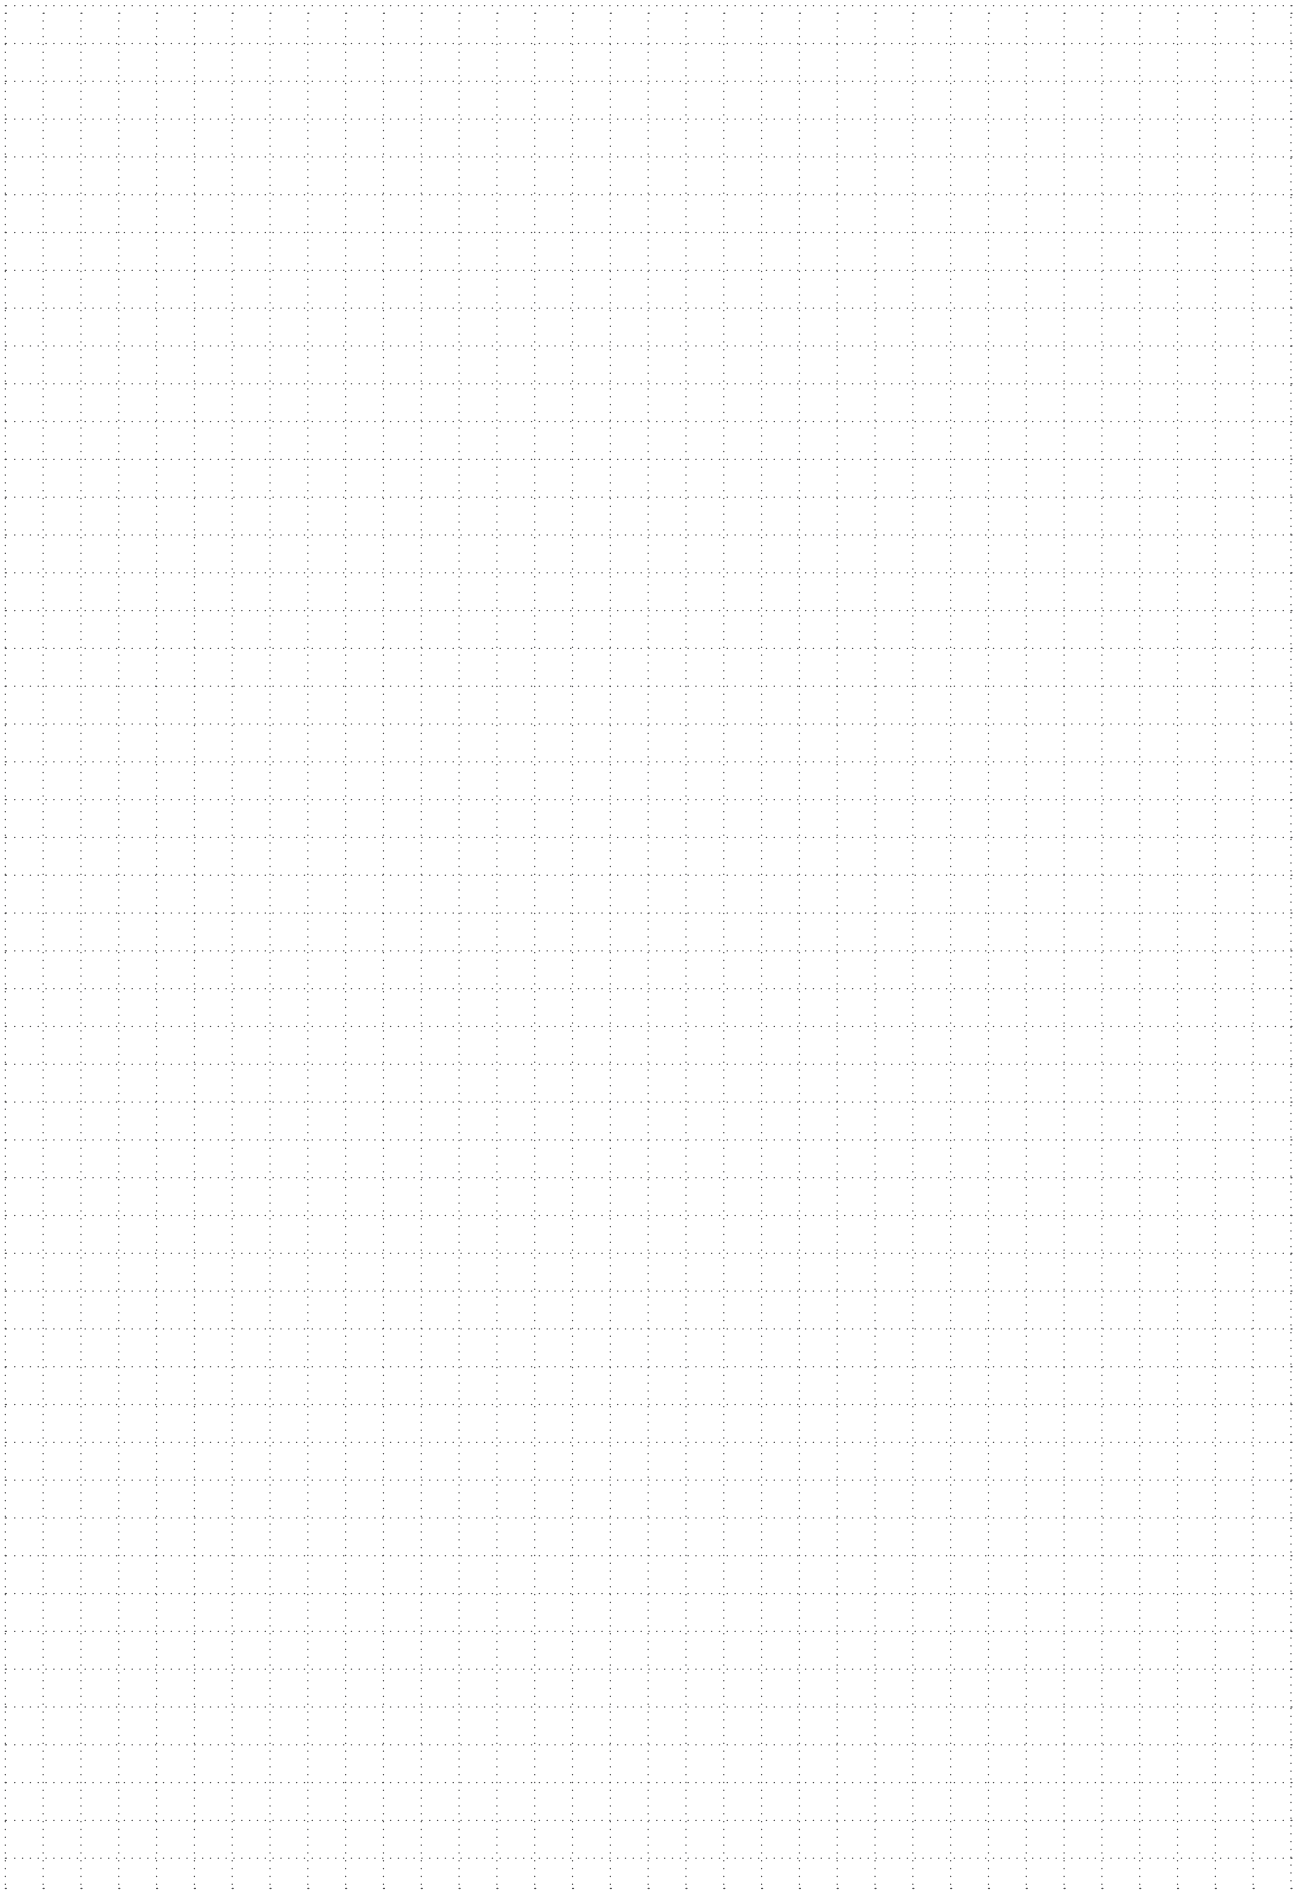




Milling Cutters
H
Face Milling
Shoulder Milling
High-Feed
Multi-purpose
Radius
Radial/3D Profiling
Side Cutters T-Slot Cutters
Chamfering
Non-Ferrous Metals
Cast Iron, High-Speed



■ Features

SEC-Sumi Dual Mill DGC series employs double-sided inserts with up to 16 corners for excellent economy. This is a general-purpose cutter featuring high cutting edge strength for high-efficiency milling and a low-burr chipbreaker design that provides high machined surface quality.


The DGC series insert lineup includes double-sided SNMT/SNET and ONMT/ONET types. Up to 16 corners can be used for improved economy.

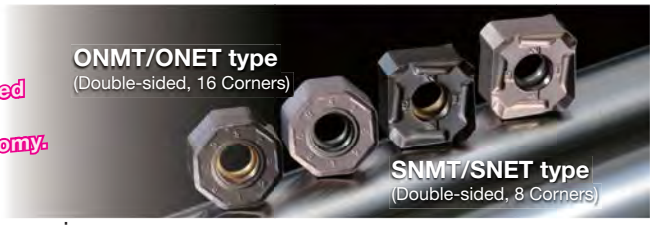


● Same cutting performance as single-sided inserts plus superior economy

Achieves levels of cutting edge sharpness and machined surface quality equivalent to single-sided cutters at a maximum depth of cut of $a_p = 3\text{mm}$.

● Application Range for General Steel Machining

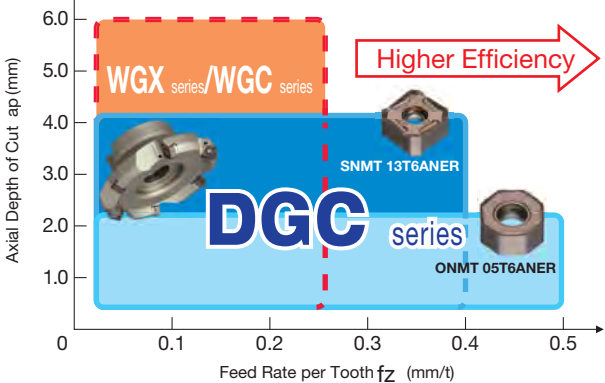


● Comparison of Cutting Force

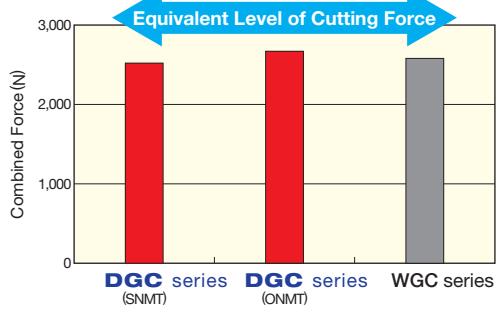


Work Material: SCM435 Tool: $\phi 100$
Cutting Conditions: $VC = 200\text{m/min}$, $f_z = 0.3\text{mm/t}$, $a_p = 3\text{mm}$, $a_e = 85\text{mm}$

● Dual-purpose body features

Two types of inserts can be used with a single body depending on the milling application, to help reduce tool costs.

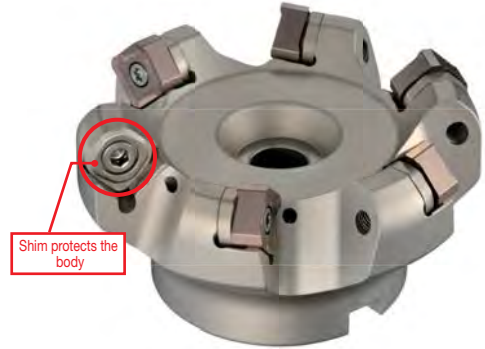

Use two types of insert for different applications

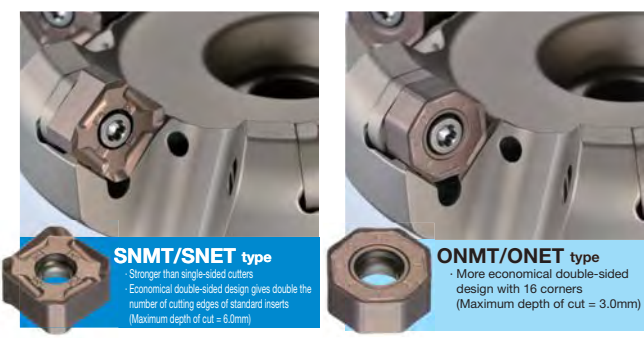

● General-purpose grade applicable to any work material

Introducing the new grade ACU2500, which is applicable to a wide variety of processes and work materials such as steel, stainless steel and cast iron.

■ Product Range

Type	Cat. No.	Dia. (mm)								
		$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	$\phi 125$	$\phi 160$	$\phi 200$	$\phi 250$
Shell	DGC 13000RS	3	3	4	4	5	6	7	8	10
	DGC 13000R <small>(inch)</small>				4	5	6	7	8	10
	DGCM 13000RS		4	5	6	7	8	10	12	14
	DGCM 13000R <small>(inch)</small>				6	7	8	10	12	14
	DGCF 13000RS		5	6	8	10	12	14	16	18
	DGCF 13000R <small>(inch)</small>				8	10	12	14	16	18
Shank	DGC 13000EW	3	3	4						

Number in ● shows the number of teeth (inch) Inch Bore


■ Chipbreaker Selection

Work Material	P M K S				N	P K	
Applications	Light Cutting/ Burr Prevention	Light Cutting	General-purpose/ Burr Prevention	General-purpose	Heavy Cutting	Non-Ferrous Metals	Surface Finish Emphasised
Features	Low Cutting Force / With Chamfer	Low Cutting Force	Standard / With Chamfer	Standard	High Strength	High Rake	Wiper
Chipbreaker	FL type	L type	FG type	G type	H type	S type	W type
Cutting Edge Cross Section							
8 16	Not Available		Not Available		Not Available	Not Available	Double-Sided, 2 Corners (*)

*Can only be used in conjunction with 8 corner inserts

● Improved machining quality

- FG type / FL type chipbreakers feature a chamfered corner to minimise burrs and provide excellent milling quality.

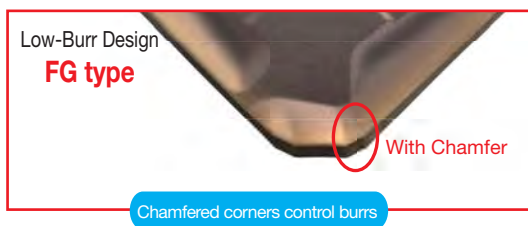


● FG type



● Competitor's Product




FG type chipbreakers with low-burr design enable high-quality milling with few burrs and minimal edge chipping




Work Material: SCM435
Tool: ø100
Cutting Conditions: vc = 200m/min, fz = 0.2mm/t
ap = 3mm, ae = 85mm

Cutter Diameter and Cutting Edge Height

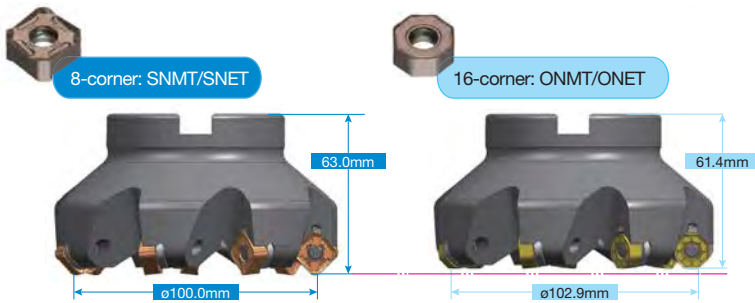

16-corner Mounting Method

⚠ Firmly align insert with guide faces, press down in the direction of the arrow, and tighten the screw to fix the insert.



⚠ Note that while the 8-corner and 16-corner types can be used interchangeably on the same body, however they create different cutter diameters, cutting edge heights and maximum cutting depths.

Body Shape (Example: With Cutter Dia. of ø100mm)

Insert	Cutter Dia. DC (mm)	Cutting Edge Height LF (mm)	Max. Depth of Cut APMX (mm)
SNMT/SNET	100.0	63.0	6.0
ONMT/ONET	102.9	61.4	3.0

Recommended Cutting Conditions (SNMT/SNET)

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Depth of Cut ap (mm)	Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.		
P	General Steel	180 to 280 HB	150-200-250	0.10-0.25-0.40	< 4	ACU2500 ACP200 ACP300 XCU2500		
	Mild Steel	≤ 180HB	180-250-350	0.10-0.30-0.45	< 4			
	Die Steel	200 to 220 HB	100-150-200	0.15-0.25-0.35	< 4			
M	Stainless Steel	—	160-200-250	0.15-0.23-0.30	< 3	ACU2500 ACM300		
K	Cast Iron	250HB	100-200-250	0.10-0.25-0.40	< 5	ACU2500 ACK200 ACK300 XCU2500 XCK2000		
N	Non-Ferrous Metals	—	500-750-1,000	0.15-0.23-0.30	< 3	DL1000		
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	< 3	ACU2500 ACM200 ACM300		


Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Recommended Cutting Conditions (ONMT/ONET)

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Depth of Cut ap (mm)	Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.		
P	General Steel	180 to 280 HB	150-200-250	0.10-0.30-0.50	< 2	ACU2500 ACP200 ACP300 XCU2500		
	Mild Steel	≤ 180HB	180-250-350	0.10-0.50-0.50	< 2			
	Die Steel	200 to 220 HB	100-150-200	0.15-0.25-0.30	< 2			
M	Stainless Steel	—	160-200-250	0.15-0.23-0.30	< 2	ACU2500 ACM300		
K	Cast Iron	250HB	100-200-250	0.10-0.30-0.50	< 2	ACU2500 ACK200 ACK300 XCU2500 XCK2000		
S	Exotic Alloy	—	30-50-80	0.10-0.20-0.30	< 2	ACU2500 ACM200 ACM300		


Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

■ Precautions when Using Wiper Inserts with Holes


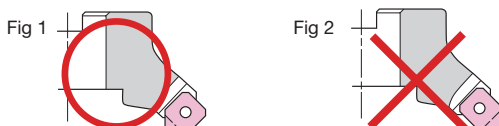


- When mounting the wiper insert, attach it as shown in Fig 1. When mounted as shown in Fig 2, normal machined surface roughness cannot be obtained.
- The wiper insert has a single corner specification.
- Refer to page N17 of Technical Guidance for details about milling with wiper inserts.

■ Chipbreaker Selection Guide

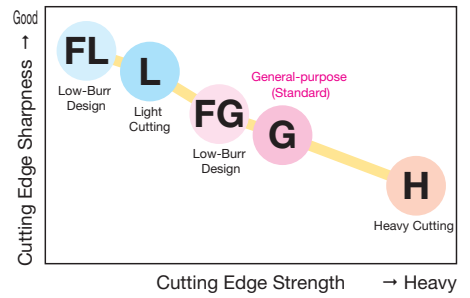

DGC 13000R(S) type

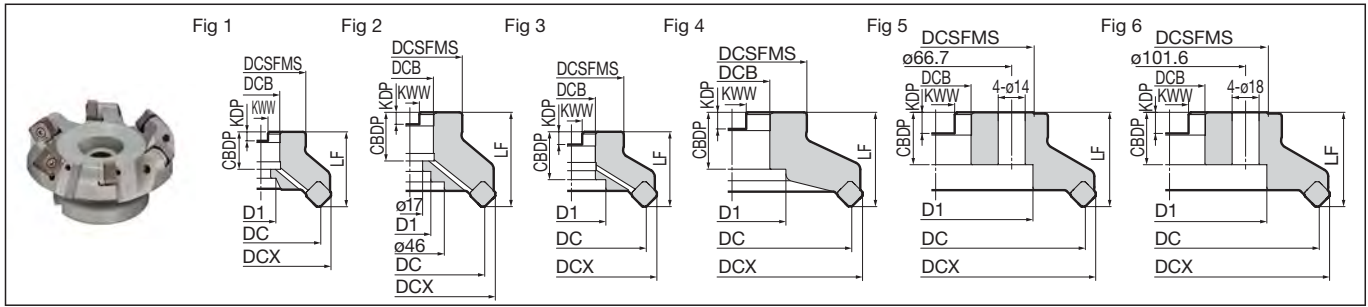

Body (Standard Pitch)

Cat. No.	Stock	Dimensions (mm)											Fig
		Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBDP	Bolt D1	Number of Teeth	Weight (kg)	
DGC 13040RS	●	40(42.9)	54(50.8)	36	40(38.44)	16	8.4	5.6	18	13.5	3	0.3	1
13050RS	●	50(52.9)	64(60.8)	40	40(38.44)	22	10.4	6.3	20	18	3	0.4	1
13063RS	●	63(65.9)	77(73.8)	50	40(38.44)	22	10.4	6.3	20	18	4	0.5	1
13080RS	●	80(82.9)	94(90.8)	60	50(48.44)	27	12.4	7	25	20	4	1.2	1
13100RS	●	100(102.9)	114(110.8)	70	50(48.44)	32	14.4	8.5	32	46	5	1.6	3
13125RS	●	125(127.9)	139(135.8)	80	63(61.44)	40	16.4	9.5	29	52	6	2.8	1
13160RS	●	160(162.9)	174(170.8)	100	63(61.44)	40	16.4	9.5	29	88	7	4.5	5
13200RS	●	200(202.9)	214(210.8)	130	63(61.44)	60	25.7	14	35	130	8	7.1	6
13250RS	●	250(252.9)	264(260.8)	130	63(61.44)	60	25.7	14	35	160	10	11.2	6
DGC 13080R	●	80(82.9)	94(90.8)	60	50(48.44)	25.4	9.5	6	25	20	4	1.2	1
13100R	●	100(102.9)	114(110.8)	70	63(61.44)	31.75	12.7	8	32.5	28	5	2.2	2
13125R	●	125(127.9)	139(135.8)	80	63(61.44)	38.1	15.9	10	35.5	55	6	2.8	1
13160R	●	160(162.9)	174(170.8)	100	63(61.44)	50.8	19.1	11	38	72	7	4.5	4
13200R	●	200(202.9)	214(210.8)	130	63(61.44)	47.625	25.4	14	35	130	8	7.1	6
13250R	●	250(252.9)	264(260.8)	130	63(61.44)	47.625	25.4	14	35	150	10	11.2	6

() indicates value for ONMT/ONET type inserts.


Inserts are sold separately. Sizes ø160mm and above do not have coolant holes.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide										Cemented Carbide	DLC	Cermet	Fig				
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300		H1	EH520	DL1000	T4500A
Process	High-speed/Light Cutting	Medium Cutting	Roughing	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	EH520	DL1000	T4500A	Fig			
SNMT 13T6ANER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1			
13T6ANER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1			
13T6ANER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1			
13T6ANER-FL	●	●	●	●	●	●	●	●	●	●	—	—	—	—	2			
13T6ANER-FG	●	●	●	●	●	●	●	●	●	●	—	—	—	—	2			
SNET 13T6ANER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1			
13T6ANER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1			
13T6ANER-FL	●	●	●	●	●	●	●	●	●	●	—	—	—	—	2			
13T6ANER-FG	●	●	●	●	●	●	●	●	●	●	—	—	—	—	2			
13T6ANFR-S	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1			
XNEU 13T6ANEN-W	●	●	●	●	●	●	●	●	●	●	—	—	—	—	3			
ONMT 05T6ANER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	—	4			
05T6ANER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	—	4			
ONET 05T6ANER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	—	4			
05T6ANER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	—	4			

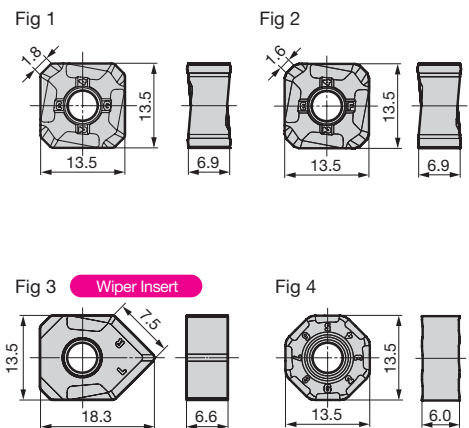


Wiper inserts can only be used in combination with 8-cornered inserts (SNMT/SNET).

The ACP100 and ACK200 may vary in colour or lustre, but these variations do not affect the performance.

Refer to H31 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Recommended Cutting Conditions **H31**

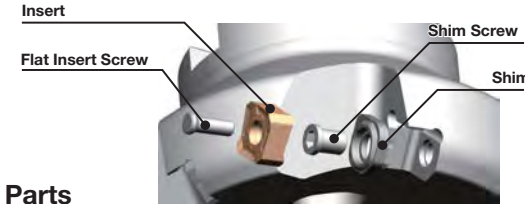

Identification Code

DGC 13 040 R S



Series Code Insert Size Cutter Dia. Feed Direction Metric Bore

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream	Flat Insert Screw (*)		
						Handle Grip	Bit				
DC ø40 to 125	DGCS13R	BW0609F	LH040	BFTX0412IP	N _m 3.0	—	HPS1015	TRB15IP	SUMI-P	BFTX0418IP	N _m 3.0
Other than above						TRDR15IP	—	—	—	—	

*Insert corners can be changed simply by loosening the screw. Only applies to ø80mm size DGC/DGCM types.

DGCM 13000R(S) type

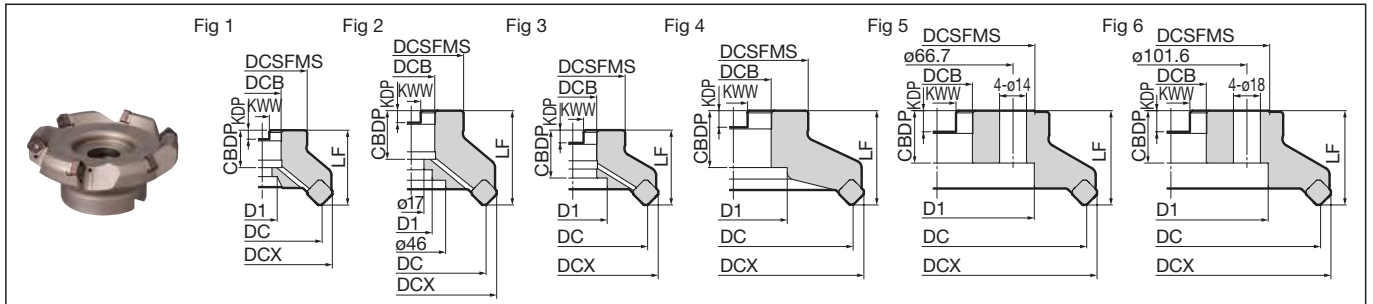


Body (Fine Pitch)

Cat. No.		Stock	Di. DC	Max. Dia. DCX	DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Number of Teeth	Weight (kg)	Fig
Metric	DGCM 13050RS	●	50(52.9)	64(60.8)	40	40(38.44)	22	10.4	6.3	20	18	4	0.3	1
	13063RS	●	63(65.9)	77(73.8)	50	40(38.44)	22	10.4	6.3	20	18	5	0.5	1
	13080RS	●	*80(82.9)	94(90.8)	60	50(48.44)	27	12.4	7	25	20	6	1.1	1
	13100RS	●	100(102.9)	114(110.8)	70	50(48.44)	32	14.4	8.5	32	46	7	1.5	3
	13125RS	●	125(127.9)	139(135.8)	80	63(61.44)	40	16.4	9.5	29	52	8	2.8	1
	13160RS	●	160(162.9)	174(170.8)	100	63(61.44)	40	16.4	9.5	29	88	10	4.6	5
	13200RS	●	200(202.9)	214(210.8)	130	63(61.44)	60	25.7	14	35	130	12	7	6
Inch	DGCM 13080R	●	*80(82.9)	94(90.8)	60	50(48.44)	25.4	9.5	6	25	20	6	1.1	1
	13100R	●	*100(102.9)	114(110.8)	70	63(61.44)	31.75	12.7	8	32.5	28	7	2.2	2
	13125R	●	125(127.9)	139(135.8)	80	63(61.44)	38.1	15.9	10	35.5	55	8	2.8	1
	13160R	●	160(162.9)	174(170.8)	100	63(61.44)	50.8	19.1	11	38	72	10	4.6	4
	13200R	●	200(202.9)	214(210.8)	130	63(61.44)	47.625	25.4	14	35	130	12	7	6
	13250R	●	250(252.9)	264(260.8)	130	63(61.44)	47.625	25.4	14	35	150	14	11.1	6

() indicates value for ONMT/ONET type inserts. Inserts are sold separately. Sizes ø160mm and above do not have coolant holes.
Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).
 Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Cermet	Fig	
Process	High-speed/Light Cutting	P	M	K	K	M	S	N	S	N	P			
	Medium Cutting													
	Roughing													
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	EH520	DL1000	T4500A
SNMT 13T6ANER-L	●	●	●	●	●	●	●	●						
13T6ANER-G	●	●	●	●	●	●	●	●				●		●
13T6ANER-H	●	●	●	●	●	●	●	●						
13T6ANER-FL	●	●	●	●	●	●	●	●						
13T6ANER-FG	●	●	●	●	●	●	●	●						
SNET 13T6ANER-L									●	●				
13T6ANER-G									●	●				
13T6ANER-FL									●	●				
13T6ANER-FG									●	●				
13T6ANFR-S											●			
XNEU 13T6ANEN-W	●	●	●	●	●	●	●	●					●	
ONMT 05T6ANER-L	●	●	●	●	●	●	●	●						
05T6ANER-G	●	●	●	●	●	●	●	●						
ONET 05T6ANER-L									●	●				
05T6ANER-G									●	●				

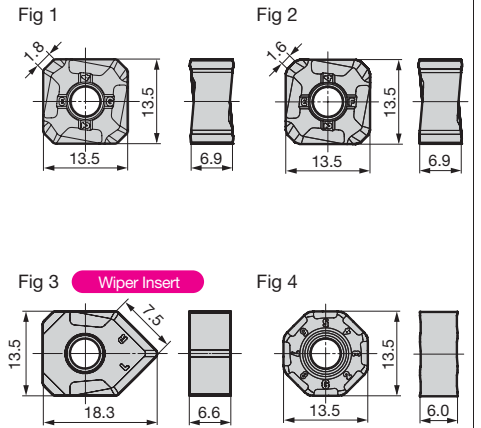

Wiper inserts can only be used in combination with 8-cornered inserts (SNMT/SNET).

The ACP100 and ACK200 may vary in colour or lustre, but these variations do not affect the performance. Refer to H31 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions). **Recommended Cutting Conditions H31**





Identification Code
DGC M 13 050 R S
 Series Code Fine Pitch Insert Size Cutter Dia. Feed Metric Direction Bore
(Sold Separately)

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream	Flat Insert Screw (*)		
						Handle Grip	Bit				
DC ø50 to 125	DGCS13R	BW0609F	LH040	BFTX0412IP	N _m 3.0	—	HPS1015	TRB15IP	SUMI-P	BFTX0418IP	N _m 3.0
Other than above						TRDR15IP	—	—	—		

*Insert corners can be changed simply by loosening the screw. Only applies to ø80mm size DGC/DGCM types.

DGCF 13000R(S) type

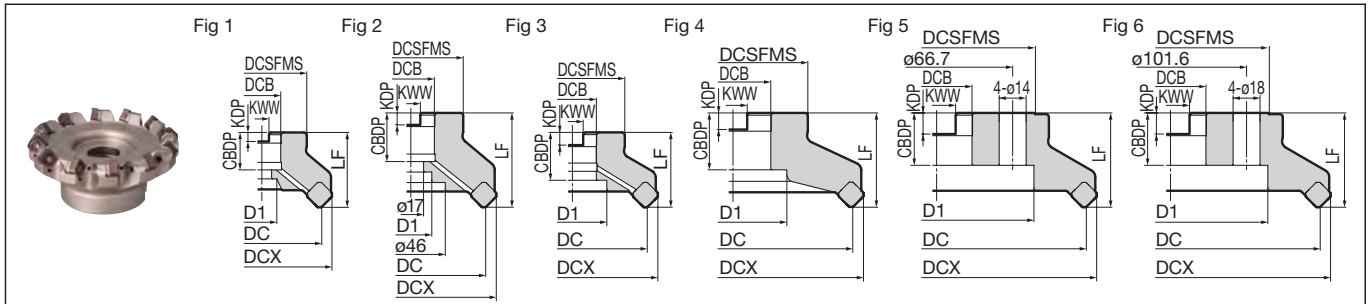

Body (Extra Fine Pitch)

Cat. No.	Stock	Dimensions (mm)											
		Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBDP	Bolt D1	Number of Teeth	Weight (kg)	Fig
DGCF 13050RS	●	50(52.9)	64(60.8)	40	40(38.44)	22	10.4	6.3	20	18	5	0.3	1
13063RS	●	63(65.9)	77(73.8)	50	40(38.44)	22	10.4	6.3	20	18	6	0.5	1
13080RS	●	80(82.9)	94(90.8)	60	50(48.44)	27	12.4	7	25	20	8	1.1	1
13100RS	●	100(102.9)	114(110.8)	70	50(48.44)	32	14.4	8.5	32	46	10	1.4	3
13125RS	●	125(127.9)	139(135.8)	80	63(61.44)	40	16.4	9.5	29	52	12	2.7	1
13160RS	●	160(162.9)	174(170.8)	100	63(61.44)	40	16.4	9.5	29	88	14	4.4	5
13200RS	●	200(202.9)	214(210.8)	130	63(61.44)	60	25.7	14	35	130	16	6.9	6
13250RS	●	250(252.9)	264(260.8)	130	63(61.44)	60	25.7	14	35	160	18	11	6
DGCF 13080R	●	80(82.9)	94(90.8)	60	50(48.44)	25.4	9.5	6	25	20	8	1.1	1
13100R	●	100(102.9)	114(110.8)	70	63(61.44)	31.75	12.7	8	32.5	28	10	2.1	2
13125R	●	125(127.9)	139(135.8)	80	63(61.44)	38.1	15.9	10	35.5	55	12	2.7	1
13160R	●	160(162.9)	174(170.8)	100	63(61.44)	50.8	19.1	11	38	72	14	4.4	4
13200R	●	200(202.9)	214(210.8)	130	63(61.44)	47.625	25.4	14	35	130	16	6.9	6
13250R	●	250(252.9)	264(260.8)	130	63(61.44)	47.625	25.4	14	35	150	18	11	6


() indicates value for ONMT/ONET type inserts. Inserts are sold separately. Sizes ø160mm and above do not have coolant holes.

Note: For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide										Cemented Carbide	DLC	Cermet	Fig	
	Process														
	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting	High-speed/Light Cutting		
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	EH520	DL1000	T4500A	
SNMT 13T6ANER-L	●	●	●	●	●	●	●	●	●	●	—	●	—	—	1
13T6ANER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1
13T6ANER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1
13T6ANER-FL	●	●	●	●	●	●	●	●	●	●	—	—	—	—	2
13T6ANER-FG	●	●	●	●	●	●	●	●	●	●	—	—	—	—	2
SNET 13T6ANER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1
13T6ANER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	—	1
13T6ANER-FL	●	●	●	●	●	●	●	●	●	●	—	—	—	—	2
13T6ANER-FG	●	●	●	●	●	●	●	●	●	●	—	—	—	—	2
13T6ANFR-S	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1
XNEU 13T6ANEN-W	●	●	●	●	●	●	●	●	●	●	—	—	—	—	3
ONMT 05T6ANER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	—	4
05T6ANER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	—	4
ONET 05T6ANER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	—	4
05T6ANER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	—	4

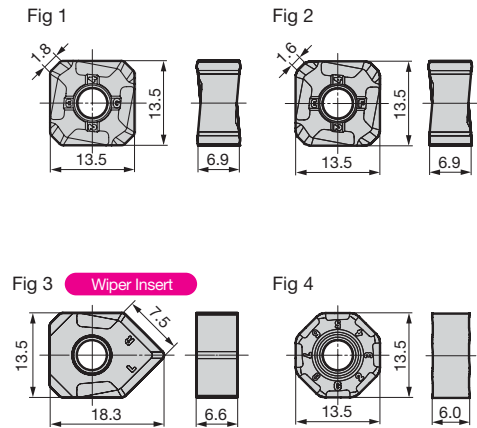


Wiper inserts can only be used in combination with 8-cornered inserts (SNMT/SNET).

The ACP100 and ACK200 may vary in colour or lustre, but these variations do not affect the performance.

Refer to H31 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Recommended Cutting Conditions **H31**

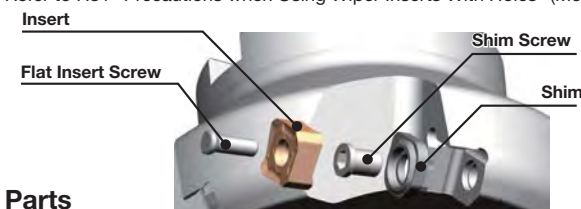

Identification Code



DGC F 13 050 R S
 Series Code Extra Insert Dia. Feed Metric
 Fine Pitch Size Direction Bore

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream	Flat Insert Screw (*)		
						Handle Grip	Bit				
DC ø50 to 125	DGCS13R	BW0609F	LH040	BFTX0412IP	Nm 3.0	—	HPS1015	TRB15IP	SUMI-P	BFTX0418IP	Nm 3.0
Other than above						TRDR15IP	—	—	—		

*Insert corners can be changed simply by loosening the screw. Only applies to ø80mm size DGC/DGCM types.

DGC 13000EW type

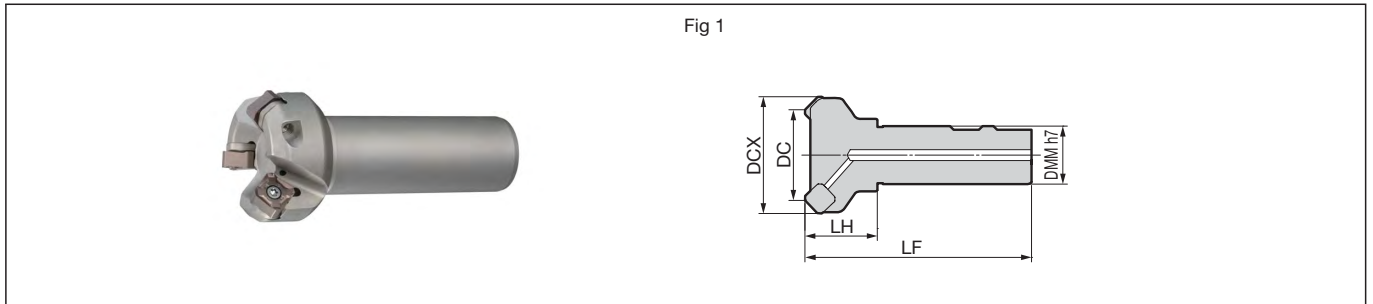

Body (Shank type)

									Dimensions (mm)
Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
DGC 13040EW	●	40(42.9)	54(50.8)	32	40(38.44)	125	3	0.7	1
13050EW	●	50(52.9)	64(60.8)	32	40(38.44)	125	3	0.9	1
13063EW	●	63(65.9)	77(73.8)	32	40(38.44)	125	4	1.1	1

() indicates value for ONMT/ONET type inserts.
 Inserts are sold separately.


Insert

Grade Classification		Coated Carbide										Cemented Carbide	DLC	Cermet	Dimensions (mm)						
Process	High-speed/Light Cutting																		Fig		
	Medium Cutting																				
	Roughing																				
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	EH520	DL1000	T4500A						
SNMT 13T6ANER-L		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	1		
13T6ANER-G		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	1		
13T6ANER-H		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	1		
13T6ANER-FL		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	2		
13T6ANER-FG		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	2		
SNET 13T6ANER-L										●	●							1			
13T6ANER-G										●	●							1			
13T6ANER-FL										●	●							2			
13T6ANER-FG										●	●							2			
13T6ANFR-S										●	●							1			
XNEU 13T6ANER-W		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	3			
ONMT 05T6ANER-L		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	4			
05T6ANER-G		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	4			
ONET 05T6ANER-L										●	●							4			
05T6ANER-G										●	●							4			

The ACP100 and ACK200 may vary in colour or lustre, but these variations do not affect the performance. Refer to H31 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Recommended Cutting Conditions H31

Insert

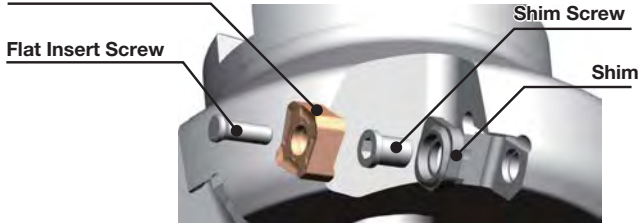

Identification Code

DGC **13** **040** **EW**
 Series Code Insert Size Dia. Shank type

Parts

Shim	Shim Screw	Wrench	Flat Insert Screw	Wrench	Anti-seizure Cream
DGCS13R	BW0609F	LH040	BFTX0412IP	3.0	TRDR15IP SUMI-P

UFO 4000 type



Rake Angle	Radial	-7°
	Axial	27°

5.5mm	45°
-------	-----

Face Milling

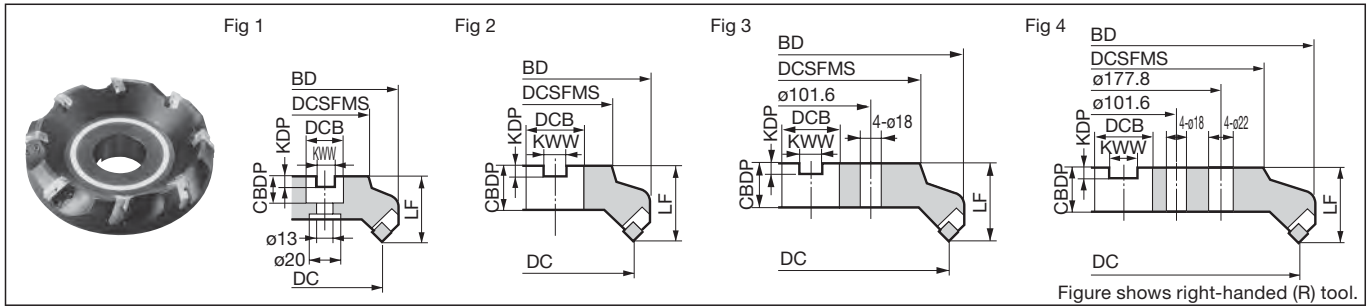


Figure shows right-handed (R) tool.

Body

Cat. No.	Stock		Dimensions (mm)										
	R	L	Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDDP	Number of Teeth	Weight (kg)	Fig
UFO 4080R/L	●		80	102	60	50	25.4	9.5	6	25	4	2.1	1
4100R/L	●		100	122	70	50	31.75	12.7	8	32	5	2.9	2
4125R/L	●		125	146	75	63	38.1	15.9	10	38	6	4.2	2
4160R/L	●		160	180	100	63	50.8	19.1	11	38	8	6.6	2
4200R/L	●		200	220	130	63	47.625	25.4	14	35	10	9.5	3
4250R/L	●		250	270	130	63	47.625	25.4	14	35	12	14.8	3
4315R/L	●		315	335	240	80	47.625	25.4	14	35	14	26.6	4


Inserts are sold separately.

Note: For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert

Grade Classification	Coated Carbide				Cemented Carbide				Cermet	Fig	
	High-speed/Light Cutting	P	M	K	A30N	G10E	H1	H10E	T250A		
Process	General-purpose										
	Roughing										
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	G10E	H1	H10E	T250A
SFEN 12T3AZTN	●	●					●				●
12T3AZTN-S							●				
12T3AZTN-W									●		
12T3AZFN										●	
SFKN 12T3AZTN	●	●	●				●				●
12T3AZTN-S							●				
12T3AZTN-W											●
12T3AZFN				●	●	●		●			
SFKR 12T3AZEN	●						●				
UW 12500R										●	

-S: Sharp Edged, -W: Strong Edged.

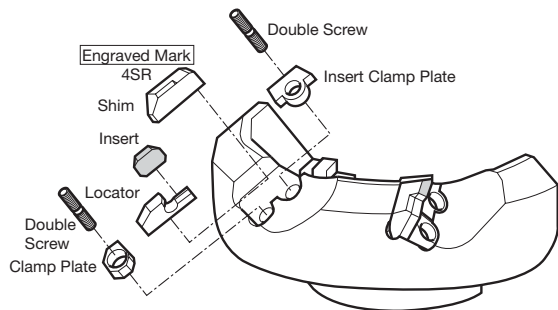

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
			Min.	Optimum - Max.	Min.	Optimum - Max.	
P	General Steel	180 to 280HB	100	175-250	0.15	0.23-0.30	ACP200
	Mild Steel	≤ 180HB	125	210-300	0.15	0.23-0.30	ACP200
	Die Steel	200 to 220HB	80	140-200	0.15	0.20-0.25	ACP200
M	Stainless Steel	—	160	190-220	0.15	0.23-0.30	ACP300
K	Cast Iron	250HB	60	155-250	0.15	0.23-0.30	ACK200
N	Non-Ferrous Alloy	—	300	550-800	0.15	0.23-0.30	H1

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Shim	Locator	Locator Clamp	Insert Clamp Plate	Double Screw	
					Size	
UFO 4000R type	UF4SR	UF4KR	UFKWR	UFTWR	WB7-15T	M7 8.0
UFO 4000L type	UF4SL	UF4KL	UFKWL	UFTWL	WB7-15T	M7 8.0

T-wrench (TT25) is included as a standard accessory.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


UFO 5000 type



Rake Angle	Radial	-7°
	Axial	27°

7.5mm **45°**

Face Milling

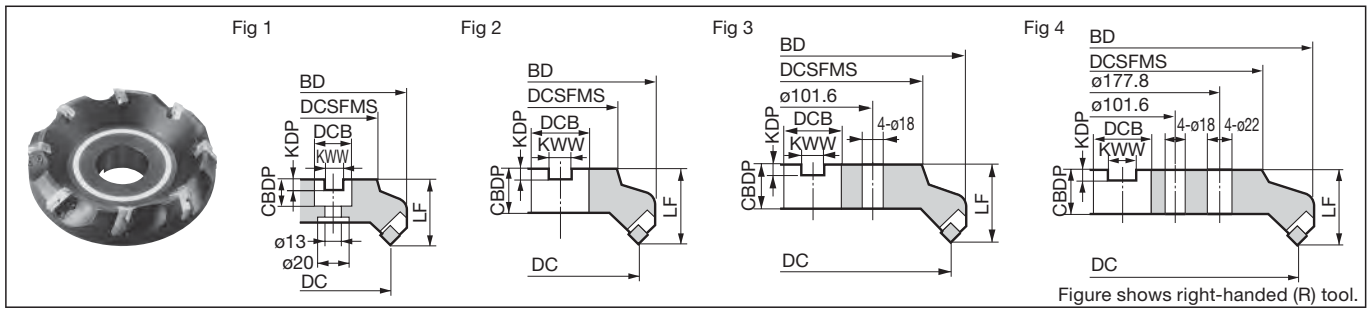

Body

Dimensions (mm)

Cat. No.	Stock		Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Number of Teeth	Weight (kg)	Fig
	R	L											
UFO 5080R/L			*80	102	60	50	25.4	9.5	6	25	4	2.0	1
5100R/L	●		100	119	70	50	31.75	12.7	8	32	5	2.8	2
5125R/L	●		125	143	75	63	38.1	15.9	10	38	6	4.0	2
5160R/L	●		160	177	100	63	50.8	19.1	11	38	8	6.4	2
5200R/L	●		200	217	130	63	47.625	25.4	14	35	10	9.2	3
5250R/L			250	267	130	63	47.625	25.4	14	35	12	14.4	3
5315R/L			315	332	240	80	47.625	25.4	14	35	14	26.1	4

Inserts are sold separately.


Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert

Dimensions (mm)

Grade Classification	Coated Carbide					Cemented Carbide				Cermet	Fig	
	P	M	K	N	H	P	K	H	H	T250A		
High-speed/Light Cutting	P	M	K	N	H	P	K	H	H	T250A	Fig 1	
General-purpose	P	M	K	N	H	P	K	H	H	T250A	Fig 2 (Grades in ACP/ACK series)	
Roughing	P	M	K	N	H	P	K	H	H	T250A	Fig 3	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	G10E	H1	H10E	T250A	Fig
SFEN 1504AZTN	●	●					●				●	1
1504AZTN-S												1
1504AZTN-W												1
1504AZFN												1
SFKN 1504AZTN	●	●	●				●				●	2(3)
1504AZTN-S												3
1504AZTN-W												3
1504AZFN				●	●		●					2(3)
UW 15500R									●			4

-S: Sharp Edged, -W: Strong Edged.

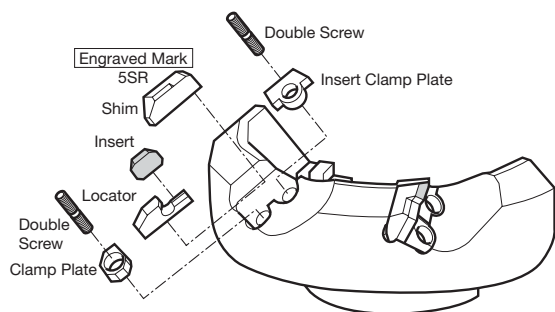

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280HB	100-175-250	0.15-0.23-0.30	ACP200
	Mild Steel	≤ 180HB	125-210-300	0.15-0.23-0.30	ACP200
	Die Steel	200 to 220HB	80-140-200	0.15-0.20-0.25	ACP200
M	Stainless Steel	—	160-190-220	0.15-0.23-0.30	ACP300
K	Cast Iron	250HB	60-155-250	0.15-0.23-0.30	ACK200
N	Non-Ferrous Alloy	—	300-550-800	0.15-0.23-0.30	H1

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Shim	Locator	Locator Clamp	Insert Clamp Plate	Double Screw		
						Size	(N·m)
UFO 5000R type	UF5SR	UF5KR	UFKWR	UFTWR	WB7-15T	M7	8.0
UFO 5000L type	UF5SL	UF5KL	UFKWL	UFTWL	WB7-15T	M7	8.0

T-wrench (TT25) is included as a standard accessory.

UFO 4000E type




Rake Angle	Radial	-7°
	Axial	27°

5.5mm	45°
-------	-----

Face Milling



Fig 1

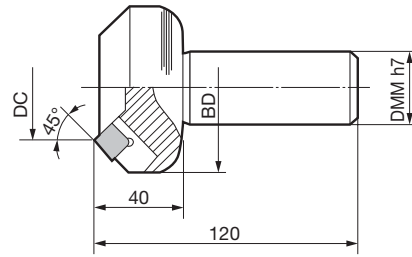



Body

Cat. No.	Stock	Dia. DC	External Dia. BD	Shank DMM	Number of Teeth	Maximum Depth of Cut	Axial Rake	Radial Rake	Fig
UFO 4050ER	●	50	74	32	4	5.5	+27°	-7°	1
4050ERS42		50	74	42	4				1
4063ER	●	63	86	32	5				1
4063ERS42		63	86	42	5				1
4080ER	●	80	102	32	6				1
4080ERS42		80	102	42	6				1
4100ER		100	123	32	7				1
4100ERS42		100	123	42	7				1

Inserts are sold separately.
Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide				Cemented Carbide				Cermet	Fig
	High-speed/Light Cutting	P	K	M	A30N	G10E	H1	H10E	T250A	
Process	General-purpose									
	Roughing									
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z				
SFEN 12T3AZTN	●	●					●		●	1
12T3AZTN-S							●			1
12T3AZTN-W										1
12T3AZFN								●		1
SFKN 12T3AZTN	●	●	●						●	2(3)
12T3AZTN-S									●	3
12T3AZTN-W									●	3
12T3AZFN			●	●	●		●			2(3)
SFKR 12T3AZEN	●									4
UW 12500R								●		5

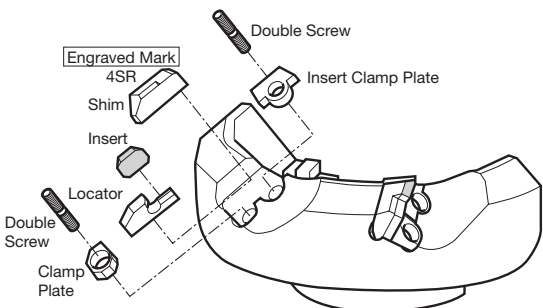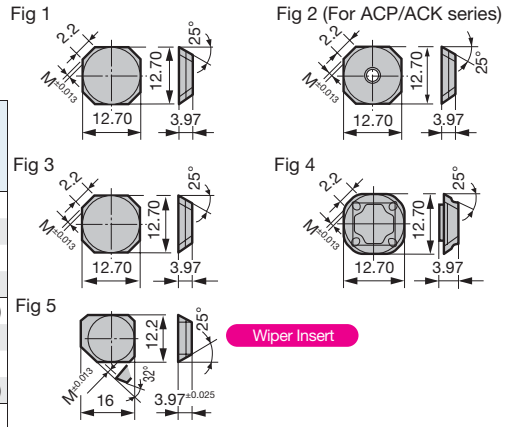

Parts

Shim	Locator	Locator Clamp Plate	Insert Clamp Plate	Double Screw	Wrench
UF4SR	UF4KR	UFKWR	UFTWR	WB7-15T M7 8.0	TT25

T-wrench (TT25) is included as a standard accessory.

Recommended Cutting Conditions

Diameter ø50 to ø63mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min)	Feed Rate fz (mm/t)	Insert Grade
P	Carbon Steel	180 to 280HB	100-125-200	0.10-0.20-0.30	ACP200
P	Alloy Steel	180 to 280HB	80-100-180	0.10-0.20-0.30	ACP200
K	Cast Iron	250HB	80-100-120	0.10-0.20-0.30	ACK200
N	Non-Ferrous Metals	—	80-160-250	0.05-0.15-0.20	H1

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Diameter ø80 to ø100mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min)	Feed Rate fz (mm/t)	Insert Grade
P	Carbon Steel	180 to 280HB	100-125-200	0.10-0.25-0.40	ACP200
P	Alloy Steel	180 to 280HB	80-100-180	0.10-0.25-0.40	ACP200
K	Cast Iron	250HB	80-100-120	0.10-0.25-0.40	ACK200
N	Non-Ferrous Metals	—	80-160-250	0.05-0.25-0.30	H1

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Rake Angle	Radial	10°
	Axial	25°

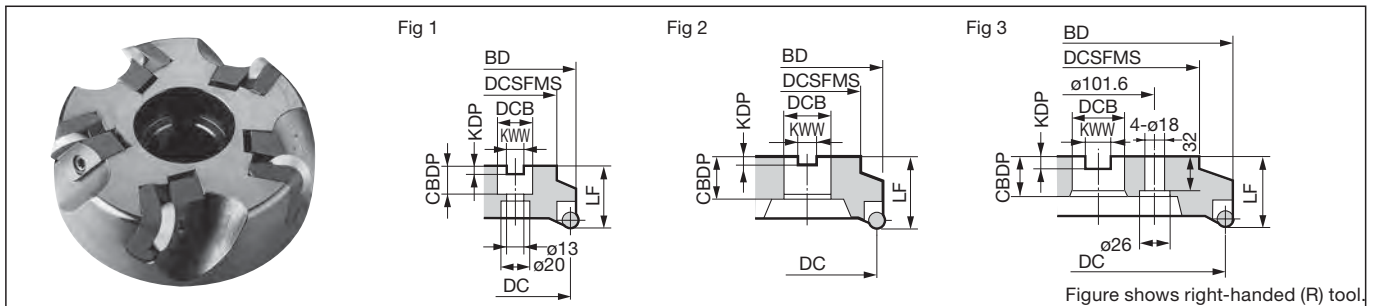


Figure shows right-handed (R) tool.

Body

Dimensions (mm)

Cat. No.	Stock		Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Number of Teeth	Weight (kg)	Fig
	R	L											
GRC 6080R/L	▲		80	101	60	50	25.4	9.5	6	25	4	2.3	1
6100R/L	▲		100	119	70	50	31.75	12.7	8	32	5	2.9	2
6125R/L	▲		125	143	80	63	38.1	15.9	10	38	6	5.1	2
6160R/L	▲		160	177	100	63	50.8	19.1	11	38	8	7.5	2
6200R/L			200	218	130	63	47.625	25.4	13.5	38	10	11.0	3
6250R/L			250	268	180	63	47.625	25.4	13.5	38	12	16.3	3

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).


Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert


Dimensions (mm)

Grade Classification	Coated Carbide						Cemented Carbide		Fig
	P	M	K	M	K	M	A30N		
High-speed/Light Cutting	P		K			M			
General-purpose		P	K				P		
Roughing		P	K						
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N		
RGEN 2004SN-S	▲	▲					▲	1	
2004SN-I						▲		1	
2004SN-T						▲		1	

Fig 1



-S: For Stainless Steel, -I: For Inconel, -T: For Titanium Alloys.

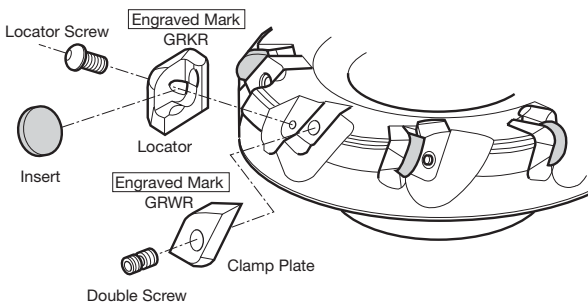

Recommended Cutting Conditions



ISO	Work Material	Hardness	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grade
P	Die Steel	200 to 220HB	80-120-160	0.15-0.23-0.30	ACP200
M	Stainless Steel	—	120-150-180	0.15-0.23-0.30	ACP200
S	Inconel	—	40-45-50	0.10-0.15-0.20	EH20Z
	Titanium Alloy	—	40-60-80	0.10-0.15-0.20	EH20Z

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Locator	Locator Screw		Clamp Plate	Double Screw		Wrench
			Size \curvearrowright (N-m)			Size \curvearrowright (N-m)	
GRC 6080R to GRC 6250R	GRKR	BH0410T	M4 3.0	GRWR	WB8-22T	M8 8.0	TT27
GRC 6080L to GRC 6250L	GRKL	BH0410T	M4 3.0	GRWL	WB8-22T	M8 8.0	TT27

FPG 4000/5000 type

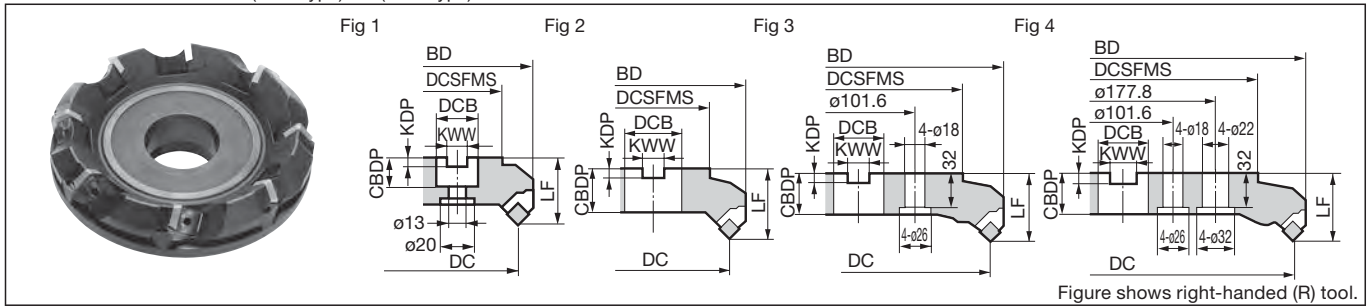

Body

Cat. No.	Stock		Dimensions (mm)										
	R	L	Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Number of Teeth	Weight (kg)	Fig
FPG 4080R/L	●	●	80	104	60	50	25.4	9.5	6	25	4	1.9	1
4100R/L	●	●	100	124	70	60	31.75	12.7	8	32	5	3.0	2
4125R/L	●	●	125	148	105	60	38.1	15.9	10	38	6	4.5	2
4160R/L	●	●	160	182	135	60	50.8	19.1	11	38	8	6.7	2
4200R/L	●	●	200	221	130	60	47.625	25.4	13.5	40	10	9.4	3
4250R/L	●	●	250	271	130	70	47.625	25.4	13.5	40	12	16.2	3
4315R/L	●	●	315	335	240	70	47.625	25.4	13.5	40	14	24.6	4
FPG 5080R/L			80	104	60	50	25.4	9.5	6	25	4	1.9	1
5100R/L			100	124	70	60	31.75	12.7	8	32	5	3.0	2
5125R/L			125	148	105	60	38.1	15.9	10	38	6	4.5	2
5160R/L			160	182	135	60	50.8	19.1	11	38	8	6.7	2
5200R/L			200	221	130	60	47.625	25.4	13.5	40	10	9.4	3
5250R/L			250	271	130	70	47.625	25.4	13.5	40	12	16.2	3
5315R/L			315	335	240	70	47.625	25.4	13.5	40	14	24.6	4

Inserts are sold separately.

Note: For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.


Insert

Grade Classification	Coated Carbide					Cemented Carbide		Cermet		SUMIDIA		
	P	M	K	N	N	P	K	P	N	N		
High-speed/Light Cutting	P		K		M			P	N	N		
General-purpose		M	K			P	K	P	N	N		
Roughing		M	K						N	N		
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	G10E	T1500A	T250A	DA1000	DA2200
SDEX 42MT												
SDKN 42M												
NF-SDKN 42M												
SDKN 42MT												
42MT-W												
SDNN 1203AETN*												
SDMR 1203AEEN												
1203AETN												
SDEX 53MT												
SDKN 53M												
53MT												

Cat. No. marked *: M ±0.08.

Insert Application Table

Body	Insert
FPG4000 type	SDOO42· SDOO12·
FPG5000 type	SDOO53·

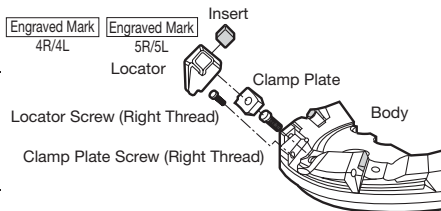

Parts

Applicable Cutter	Locator	Locator Screw	Clamp Plate	Clamp Plate Screw
FPG4000R type	LFP4R	FBH0512	FPWR	FBX0817
FPG4000L type	LFP4L		FPWL	
FPG5000R type	LFP5R		FPWR	
FPG5000L type	LFP5L		FPWL	

T-wrenches used are TH030 (locator screw) and TH040 (clamp plate screw).

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280HB	100-130-160	0.15-0.28-0.40	ACP200
	Mild Steel	≤ 180HB	125-210-300	0.15-0.28-0.40	ACP200
	Die Steel	200 to 220HB	80-100-120	0.15-0.23-0.30	ACP200
M	Stainless Steel	—	150-175-200	0.15-0.23-0.30	ACP300
K	Cast Iron	250HB	60-155-250	0.15-0.23-0.30	ACK200
N	Non-Ferrous Alloy	—	300-650-1,000	0.15-0.23-0.30	G10E

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


FPE 4000 type



Rake Angle	Radial	-3°
	Axial	15°

6.5mm **45°**

Face Milling

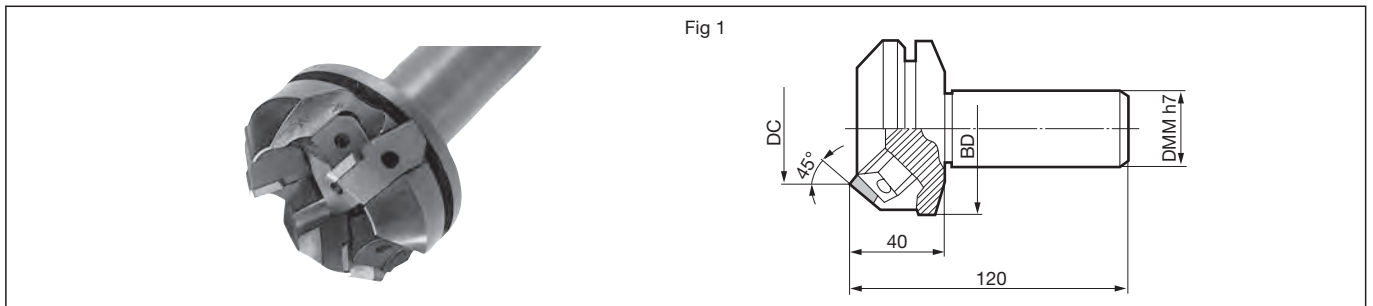

Body

Cat. No.	Stock	Dia. DC	External Dia. BD	Shank DMM	Number of Teeth	Maximum Depth of Cut	Axial Rake	Radial Rake	Fig
FPE 4050R	●	50	73	32	3	6.5	+15°	-3°	1
4050RS42		50	73	42	3				1
4063R	●	63	84	32	4				1
4063RS42		63	84	42	4				1
4080R	●	80	100	32	4				1
4080RS42		80	100	42	4				1
4100R		100	118	32	5				1
4100RS42		100	118	42	5				1

Inserts are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide						Cemented Carbide	Cermet	SUMIDIA		Fig	
	High-speed/Light Cutting	P	K	M			P	P	N	N		
Process	General-purpose	P	K	M			P	K	P	N	N	
	Roughing	P	K							N	N	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	G10E	T1500A	T250A	DA1000	DA2200
SDEX 42MT				●	●	●	●	●	●	●	—	—
SDKN 42M				●	●	●	●	●	●	●	—	—
NF-SDKN 42M											●	▲
SDKN 42MT	●	●	●				●		●	●	—	—
42MT-W											●	●
SDNN 1203AETN*	●	●					●			●	—	—
SDMR 1203AEEN	●	●					●			●	—	—
1203AETN										●	—	—

Fig 1 (Grades in ACP/ACK series)

Fig 2

Fig 3

Cat. No. marked *: M ±0.08.

Parts

Locator	Locator Screw	Clamp Plate	Clamp Plate Screw		Wrench
				Size	
LFE4R	FBH0512	FEWR	FBX0817	M8 8.0	TH040

Recommended Cutting Conditions

Diameter ø50 to ø63mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	100-125-150	0.10-0.20-0.30	ACP200
P	Alloy Steel	180 to 280HB	80-100-120	0.10-0.20-0.30	ACP200
K	Cast Iron	250HB	80-100-120	0.10-0.20-0.30	ACK300



Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Diameter ø80 to ø100mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	100-125-150	0.10-0.25-0.40	ACP200
P	Alloy Steel	180 to 280HB	80-100-120	0.10-0.25-0.40	ACP200
K	Cast Iron	250HB	80-100-120	0.10-0.25-0.40	ACK300

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

EHG 4000/5000 type

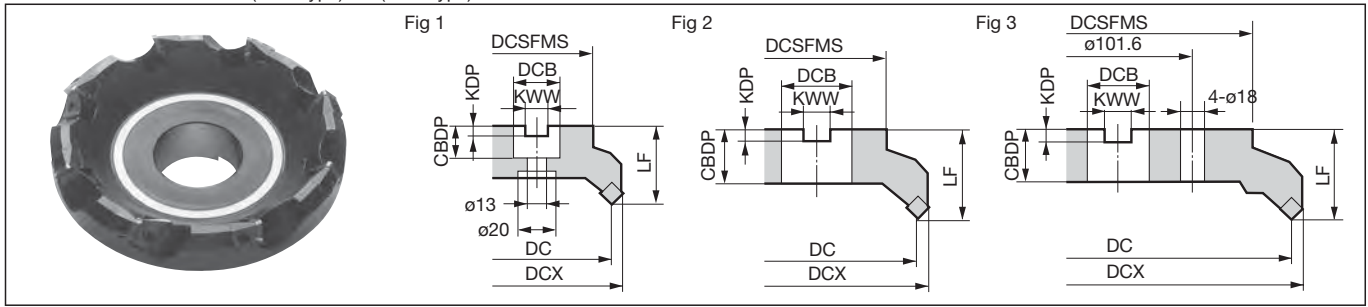

Body

												Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Number of Teeth	Weight (kg)	Fig	
EHG 4080R	●	80	95	60	50	25.4	9.5	6	25	4	1.3	1	
4100R	●	100	114	70	50	31.75	12.7	8	32	5	2.0	2	
4125R	●	125	138	75	63	38.1	15.9	10	38	6	3.3	2	
4160R	●	160	173	100	63	50.8	19.1	11	38	8	4.8	2	
4200R	●	200	213	130	63	47.625	25.4	13.5	35	10	7.1	3	
EHG 5080R	●	80	100	60	50	25.4	9.5	6	25	4	1.5	1	
5100R	●	100	118	70	50	31.75	12.7	8	32	5	2.2	2	
5125R	●	125	143	75	63	38.1	15.9	10	38	6	3.6	2	
5160R	●	160	178	100	63	50.8	19.1	11	38	8	5.2	2	
5200R	●	200	218	130	63	47.625	25.4	13.5	35	10	7.6	3	

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide					Cemented Carbide	Cermet				
	High-speed/Light Cutting	P	M	K	M	A30N	G10E	T250A	Inscribed Circle IC	Thickness s	Fig
	General-purpose										
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z					
SECN 42MT	●						●		12.70	3.18	1
42M									12.70	3.18	1
SEEN 42MT	●	●	●						12.70	3.18	3*
SEKN 42MT	●	●	●				●		12.70	3.18	2(3)
42MT-W								●	12.70	3.18	3
42M				●	●	●	●		12.70	3.18	2(3)
SENN 1203AFN*	●						●		12.70	3.18	3
SEMR 1203AFEN	●						●		12.70	3.18	4
SEER 1203AFEN**	●						●		12.70	3.18	4
SECN 53MT									15.875	4.76	1
53M									15.875	4.76	1
SEKN 53MT	●	●	●				●		15.875	4.76	3
53M				●	●				15.875	4.76	3


Cat. No. marked *: M ±0.08 Chamfer 1.4 → 2.0.

Cat. No. marked **: M ±0.025 Chamfer 2.0 → 2.2.

The shape of *-marked E class inserts differs slightly from the above figures.

Insert Application Table

Body	Insert
EHG4000 type	SEON42· SEOO12·
EHG5000 type	SEON53·

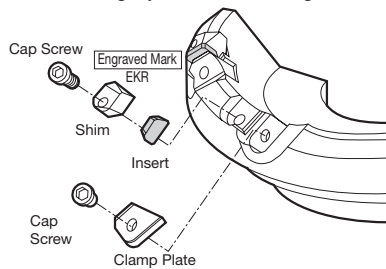

Parts


Applicable Cutter	Shim	Clamp Plate	Cap Screw		Wrench
				Size N-m	
EHG4000R type	EHK4R	EHW4R	EHBX0512	M5 5.0	TH040
EHG5000R type	EHK5R	EHW5R			

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.			
P	General Steel	180 to 280HB	160-205-250	0.10-0.15-0.20	ACP200		
	Mild Steel	≤ 180HB	160-230-300	0.10-0.18-0.25	ACP200		
	Die Steel	200 to 220HB	80-100-120	0.10-0.18-0.25	ACP200		
M	Stainless Steel	—	160-180-200	0.10-0.20-0.30	ACP300		
K	Cast Iron	250HB	80-100-120	0.10-0.20-0.30	ACK200		

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

MEMO

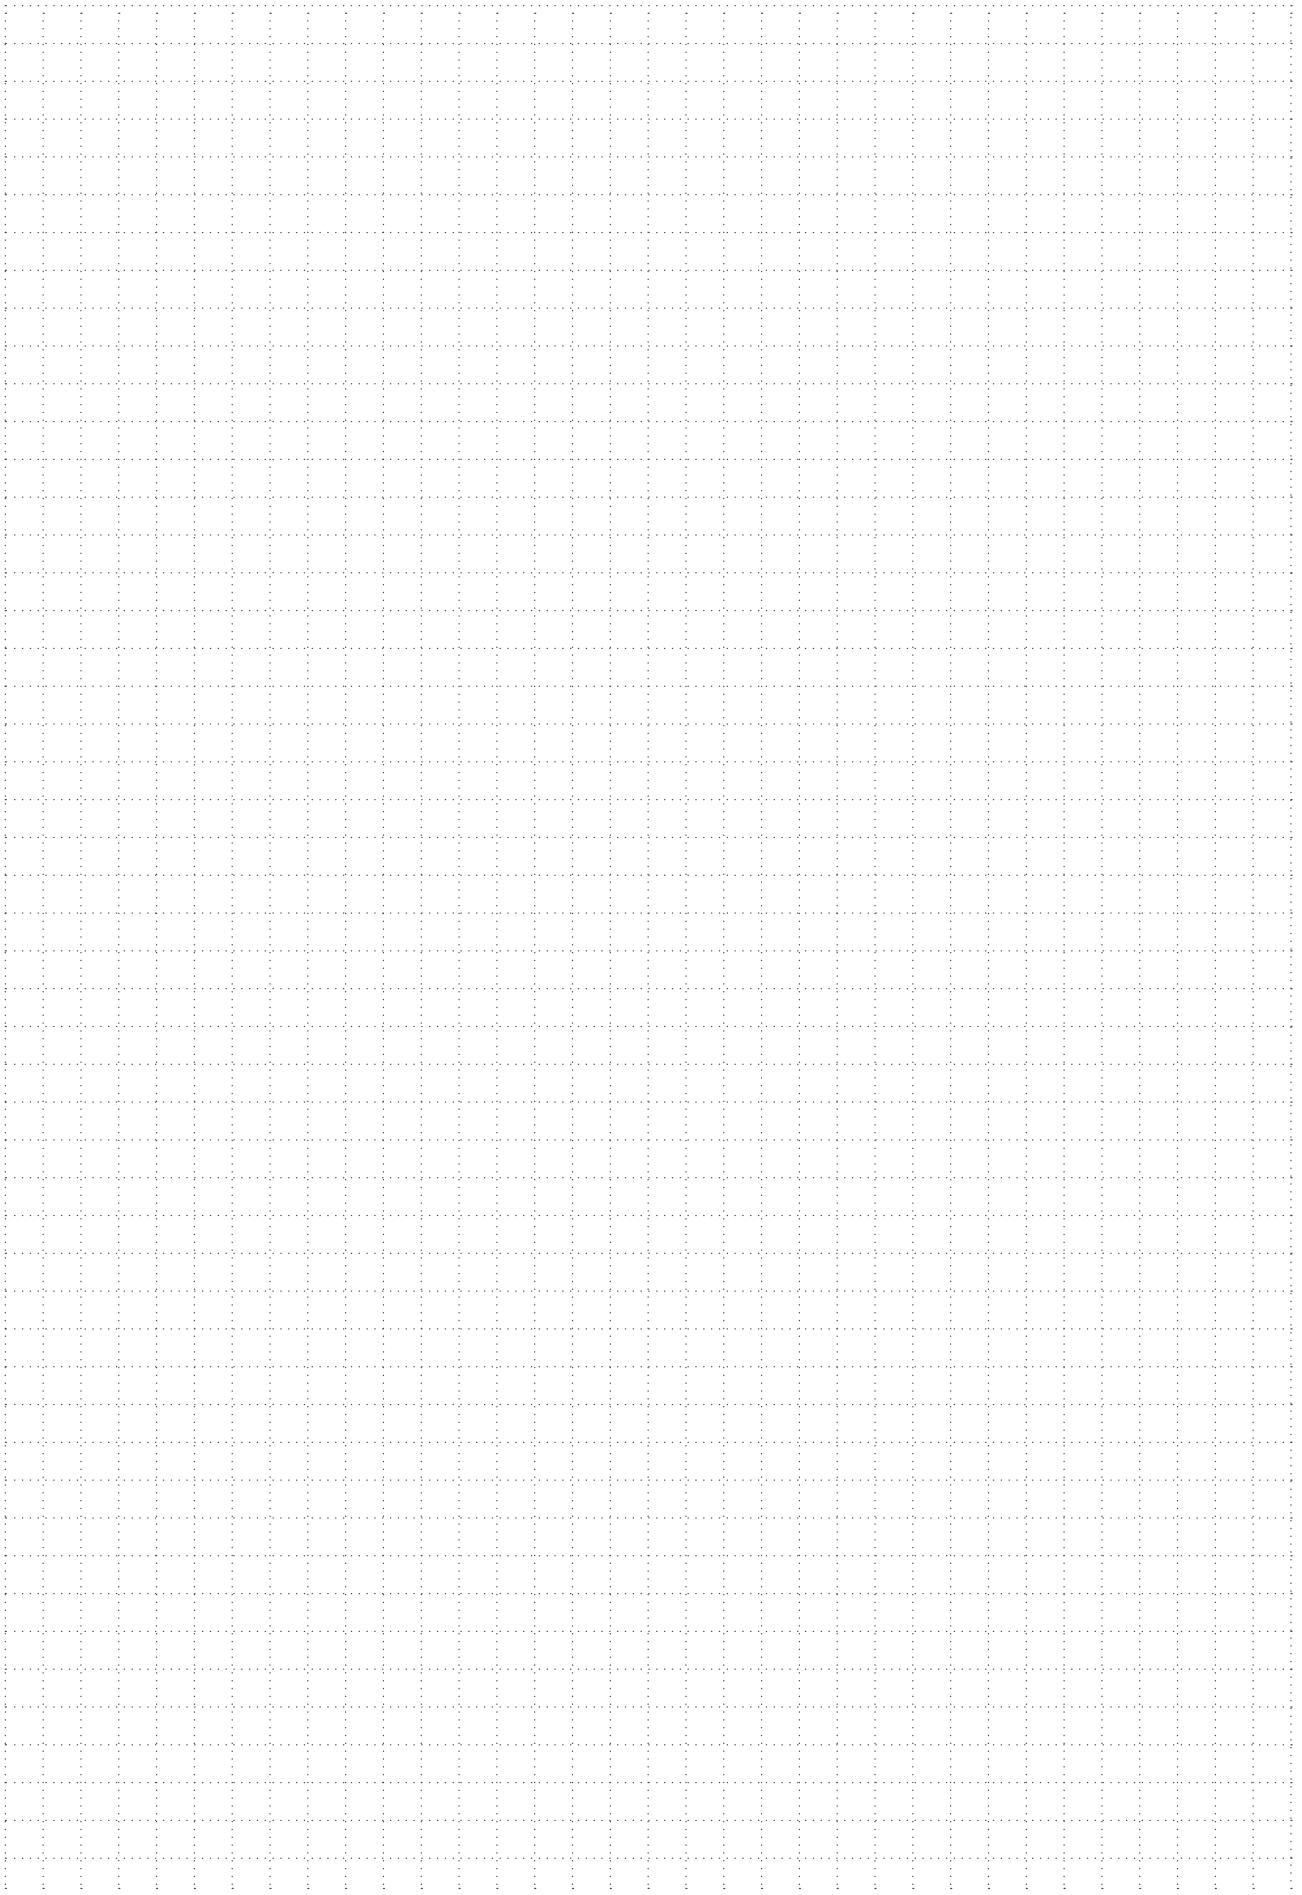

DNX(F) series/DNH series/DNHS series

High-efficiency Face Milling Cutters for Cast Iron and Cast Steel



Features

- Achieves high-efficiency milling with a max. 8mm depth of cut
- Employs negative inserts with chipbreakers that have a strong cutting edge on the double negative type body. Economical design using 8 corners
- Supports general to high-efficiency high-feed milling with three body types. Same inserts can be used with all types



Negative inserts with a rake angle achieve low cutting force and high-feed milling

Product Range

DNX(F) type General-purpose type

Max. Depth of Cut	8mm
Cutting Edge Angle	65°
Dia.	DNX 12000R(S) ø80 to ø250mm
	DNXF 12000R(S) ø80 to ø160mm
	Extra Fine Pitch ø80 to ø160mm

DNHS type Medium Depth of Cut High Feed type

Max. Depth of Cut	5mm
Cutting Edge Angle	24°
Dia.	DNHS 12000R
	Medium Depth of Cut High Feed type ø80 to ø160mm

DNH type Small Depth of Cut High Feed type


Max. Depth of Cut	3mm
Cutting Edge Angle	24°
Dia.	DNH 12000R
	Small Depth of Cut High Feed type ø80 to ø160mm




Usage Region (Cutting Cast Iron)

Cut carbon steel at 20 to 30% reduction.

* The following conditions are provided as a general guide. Actual conditions will need to be adjusted according to tool overhang, machine rigidity, depth of cut and other factors.

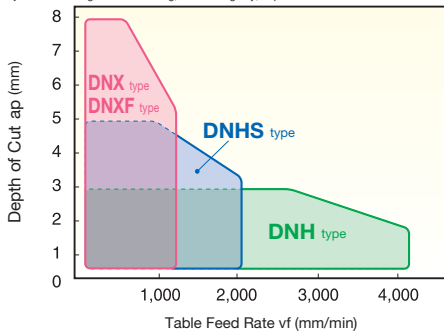

Comparison of Cutting Force

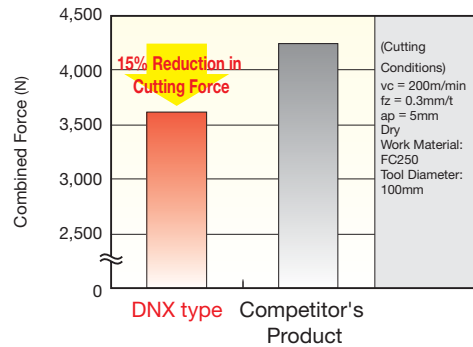

Recommended Cutting Conditions

DNX type / DNXF type

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
K	Cast Iron	250HB	150-225-300	0.10-0.20-0.30	ACK200 ACK300
	Ductile Cast Iron	250HB	150-200-250	0.10-0.18-0.25	ACK200 ACK300
P	Carbon Steel	180 to 280HB	150-175-200	0.10-0.15-0.20	ACP200
	Alloy Steel	180 to 280HB	150-175-200	0.10-0.15-0.20	ACP200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


DNHS type/DNH type

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
K	Cast Iron	250HB	150-225-300	0.10-0.55-1.00	ACK200 ACK300
	Ductile Cast Iron	250HB	150-200-250	0.10-0.55-1.00	ACK200 ACK300
P	Carbon Steel	180 to 280HB	150-175-200	0.10-0.45-0.80	ACP200
	Alloy Steel	180 to 280HB	150-175-200	0.10-0.35-0.60	ACP200



Note For DNHS type, insert heights are alternatively placed, so the actual feed rate per tooth is double. fz = 0.5mm/t (actual feed rate 1.0mm/t) as the upper limit. The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Precautions when Using Wiper Inserts with Holes

- When mounting the wiper insert, attach it as shown in Fig 1.
- When mounted as shown in Fig 2, normal machined surface roughness cannot be obtained.
- Wiper inserts are single-cornered and double-sided.
- Refer to Technical Guidance page N17 in the General Catalogue for details about wiper inserts.
- **Do not use with DNHS and DNH types.**

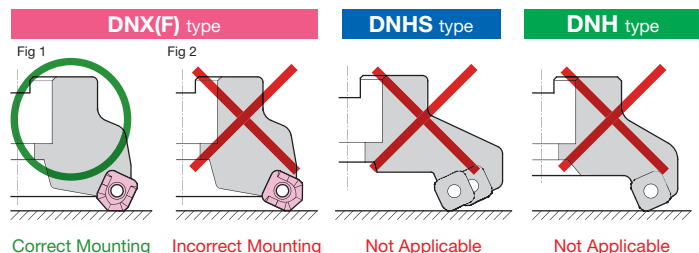

SEC- DNX(F)12000 type

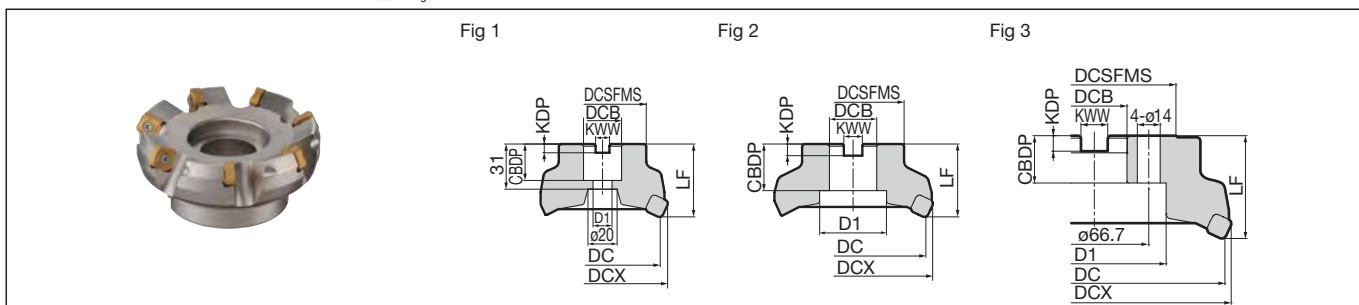

Body (Standard Pitch) Cutting Edge Angle 65°

Dimensions (mm)

	Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Number of Teeth	Effective No. of Teeth	Weight (kg)	Fig
Metric	DNX 12080RS	●	*80	88	60	50	27	12.4	7	25	13.5	6	6	1.2	1
	12100RS	●	100	108	80	50	32	14.4	8.5	29	46	7	7	1.6	2
	12125RS	●	125	133	80	63	40	16.4	9.5	29	56	8	8	2.8	2
	12160RS	●	160	168	100	63	40	16.4	9.5	29	88	10	10	4.4	3
Inch	DNX 12080R	●	*80	88	60	50	25.4	9.5	6	25	13	6	6	1.2	1
	12100R	●	100	108	70	50	31.75	12.7	8	32	46	7	7	1.6	2
	12125R	●	125	133	80	63	38.1	15.9	10	38	56	8	8	2.8	2
	12160R	●	160	168	100	63	50.8	19.1	11	38	72	10	10	4.4	2

Body (Extra Fine Pitch) Cutting Edge Angle 65°

Dimensions (mm)

	Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Number of Teeth	Effective No. of Teeth	Weight (kg)	Fig
Metric	DNXF 12080RS	●	*80	88	60	50	27	12.4	7	25	13.5	8	8	1.2	1
	12100RS	●	100	108	80	50	32	14.4	8.5	29	46	10	10	1.6	2
	12125RS	●	125	133	80	63	40	16.4	9.5	29	56	11	11	2.7	2
	12160RS	●	160	168	100	63	40	16.4	9.5	29	88	12	12	4.4	3
Inch	DNXF 12080R	●	*80	88	60	50	25.4	9.5	6	25	13	8	8	1.2	1
	12100R	●	100	108	70	50	31.75	12.7	8	32	46	10	10	1.6	2
	12125R	●	125	133	80	63	38.1	15.9	10	38	56	11	11	2.7	2
	12160R	●	160	168	100	63	50.8	19.1	11	38	72	12	12	4.4	2

Cutters with sizes of 200mm or above come with locators. Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert

Dimensions (mm)

Grade Classification		Coated Carbide					Cutting edge Shape	Applications	Fig
Process	High-speed/Light Cutting	K	K						
		General-purpose	K	K	P	M	P		
		Roughing			K	P	M		
Cat. No.		ACK100	ACK200	ACK300	ACP200	ACP300			
SNMT 1205ZHEN-L	●	●	●	●			V-shaped Edge type	Light Cutting	
1205ZHEN-G	●	●	●	●			V-shaped Edge type	General-purpose	
1205ZHEN-H	●	●	●	●				Heavy Cutting	
SNMT 1205ZHEN-SH	●	●	●	●	●		Straight Edge type	Improved Chip Control	
XNGT 1205ZHEN-W	●	●	●				Wiper Insert	Improved Surface Roughness	

Fig 1 L type/G type/H type

Fig 2 SH type

Fig 3 Wiper Insert

● Cross Section of Cutting Edge

Refer to H44 "Precautions when Using Wiper Inserts With Holes" (Mounting Precautions).

Recommended Cutting Conditions H44

Identification Code

DNX F 12 080 R S

Series Code Extra Fine Pitch Insert Size Dia. Feed Metric Direction Bore

Parts



Cat. No.	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Anti-seizure Cream
		Nm		Handle Grip	Bit	
DNX(F) 12080R(S) to DNX(F) 12100R(S) DNX(F) 12125R(S) to DNX(F) 12160R(S)	BFTX0412IP	3.0	—	HPS1015	TRB15IP	SUMI-P
			TRDR15IP	—	—	SUMI-P

Recommended Tightening Torque (N-m)

H45

Milling Cutters
Face Milling
Shoulder Milling
High-Feed
Multi-purpose
Radius
Radial/3D Profiling
T-Slot Cutters
Side Cutters
Chamfering
Non-Ferrous Metals
Cast Iron, High-Speed

SEC- DNH(S)12000 type

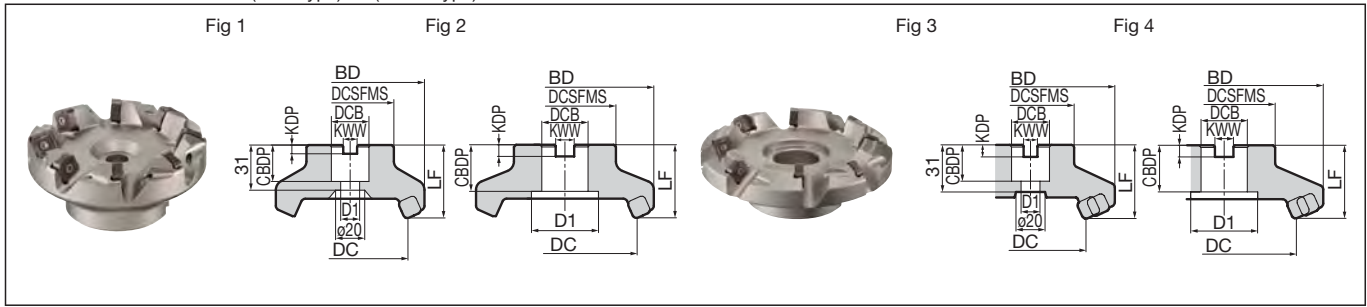

Body Cutting Edge Angle 24° Small Depth of Cut High Feed type

Dimensions (mm)

Cat. No.	Stock	Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Number of Teeth	Effective No. of Teeth	Weight (kg)	Fig
DNH 12080R	●	80	104	60	50	25.4	9.5	6	25	13	6	6	1.5	1
12100R	●	100	124	70	50	31.75	12.7	8	32	46	7	7	1.9	2
12125R	●	125	149	80	63	38.1	15.9	10	38	56	8	8	3.2	2
12160R	●	160	184	100	63	50.8	19.1	11	38	72	10	10	5.1	2

Body Cutting Edge Angle 24° Medium Depth of Cut High Feed type

Dimensions (mm)

Cat. No.	Stock	Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Number of Teeth	Effective No. of Teeth	Weight (kg)	Fig
DNHS 12080R	●	80	116	60	50	25.4	9.5	6	25	13	6	3	1.7	3
12100R	●	100	136	70	50	31.75	12.7	8	32	46	8	4	2.3	4
12125R	●	125	161	80	63	38.1	15.9	10	38	56	10	5	3.2	4
12160R	●	160	196	100	63	50.8	19.1	11	38	72	12	6	6.2	4

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert

Dimensions (mm)

Grade Classification		Coated Carbide					Cutting Edge Shape	Applications	Fig
Process		ACK100	ACK200	ACK300	ACP200	ACP300			
High-speed/Light Cutting	K	K					V-shaped Edge type	Light Cutting General-purpose Heavy Cutting	1
General-purpose	K	K							
Roughing			K						
Cat. No.		ACK100	ACK200	ACK300	ACP200	ACP300	Straight Edge type	Improved Chip Control	2
SNMT 1205ZHEN-L	●	●	●	●	●	●			
1205ZHEN-G	●	●	●	●	●	●			
1205ZHEN-H	●	●	●	●	●	●			
SNMT 1205ZHEN-SH	●	●	●	●	●	●			

Fig 1

L type/G type/H type

Fig 2

SH type

● Cross Section of Cutting Edge

L type G type H type SH type

Recommended Cutting Conditions **H44**

Parts

Cat. No.	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Anti-seizure Cream
	Image	Torque (N·m)		Handle Grip	Bit	
DNH(S) 12080R to DNH(S) 12100R		3.0				SUMI-P
DNH(S) 12125R to DNH(S) 12160R	BFTX0412IP	3.0	TRDR15IP	—	—	SUMI-P


DNF 4000 type



Rake Angle	Radial	-6°
	Axial	-5°

6.5mm **65°**

Face Milling

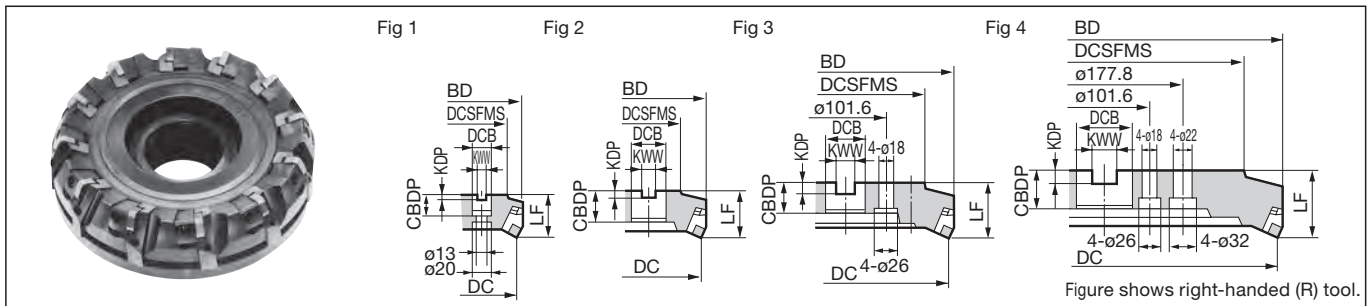

Body

Cat. No.	Stock		Dimensions (mm)										Fig
	R	L	DC	BD	DCSFMS	LF	DCB	KWW	KDP	CBBDP	Number of Teeth	Weight (kg)	
DNF 4080R/L	●		80	96	60	50	25.4	9.5	6	25	6	1.8	1
4100R/L	●	●	100	116	75	60	31.75	12.7	8	32	8	3.0	2
4125R/L	●		125	141	75	60	38.1	15.9	10	38	10	4.3	2
4160R/L	●		160	176	100	60	50.8	19.1	11	38	12	6.8	2
4200R/L	●		200	216	130	60	47.625	25.4	13.5	36	16	9.8	3
4250R/L			250	266	200	70	47.625	25.4	13.5	40	20	18.1	3
4315R/L			315	331	240	70	47.625	25.4	13.5	40	24	27.4	3
4400R/L			400	416	300	80	63.5	25.4	13.5	45	32	49.6	4
4500R/L			500	516	400	80	63.5	25.4	13.5	45	40	76.3	4

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide				Cemented Carbide				Cermet	SUMIBORON	Fig		
Process		P	M	K	P	P	K	K	P	H				
High-speed/Light Cutting		P		K					P	H				
General-purpose			M	K	P	P	K	K	P	H				
Roughing			M	K					P	H				
Cat. No.		ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	A30	H10E	G10E	T1500A	T250A	BN2000
CSNH 43M					●	●		●						
43MT												●	●	
CSN 43M														
43MT														
CSNB 43M														
43MT														
SNC 433														
434														
SNMN 432								●						
433														
434					●									
SNMN 432TN-S														
433TN-S														
434TN-S														
NW 100														

Fig 1

Fig 2

Fig 3

Fig 4

Fig 5 **Wiper Insert**

Parts

Applicable Cutter	Locator (*)	Insert Clamp Plate
DNF4080R DNF4100R	LNF40R	FTW40R
DNF4125R Up to DNF4500R	LNF40R	FTW41R
DNF4080L Up to DNF4100L	LNF40L	FTW40L
DNF4125L Up to DNF4500L	LNF40L	FTW41L

Engraved Mark F40R/F40L Engraved Mark F41R/F41L

Double Screw WB8-30T Insert Clamp Plate Insert

Cap Screw BX0510 Wrench TT27 LH040 Locator

Double Screw	Size	Torque (N·m)
WB8-30T	M8	8.0


*: To use wiper inserts, change locators to LNF40R(L).

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280HB	80-100-120	0.10-0.13-0.15	T250A
	Mild Steel	≤ 180	100-130-160	0.10-0.18-0.25	T250A
K	Cast Iron	250HB	150-200-250	0.10-0.15-0.20	ACK200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

APG 4000 type



Face Milling

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

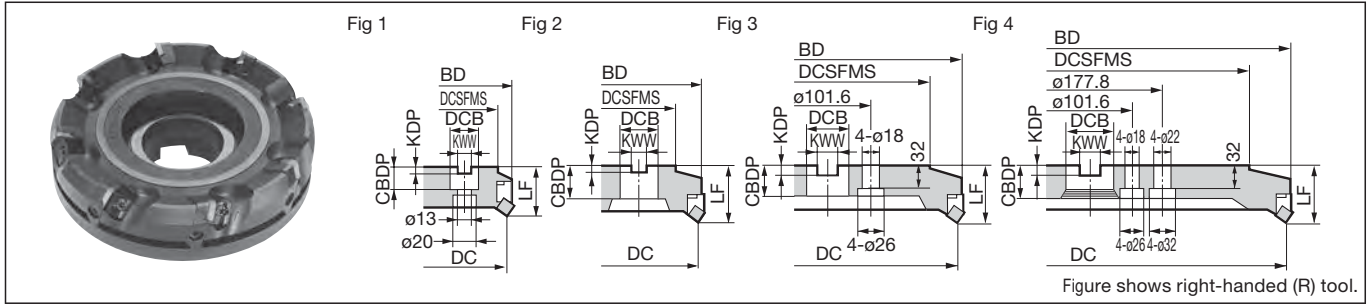


Figure shows right-handed (R) tool.

Body

Dimensions (mm)

Cat. No.	Stock		Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Number of Teeth	Weight (kg)	Fig
	R	L											
APG 4080R/L	●		80	90	60	50	25.4	9.5	6	25	5	1.6	1
4100R/L	●		100	110	75	60	31.75	12.7	8	32	5	2.7	2
4125R/L	●		125	134	75	60	38.1	15.9	10	38	6	4.0	2
4160R/L	●		160	169	100	60	50.8	19.1	11	38	8	6.5	2
4200R/L	●		200	208	130	60	47.625	25.4	13.5	38	10	9.1	3
4250R/L	●		250	258	200	70	47.625	25.4	13.5	40	12	18.3	3
4315R/L	●		315	323	240	70	47.625	25.4	13.5	40	16	27.6	3
4400R/L	●		400	408	300	70	63.5	25.4	13.5	45	20	48.4	4
4500R/L	●		500	508	400	70	63.5	25.4	13.5	45	24	68.1	4


Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).


Insert

Dimensions (mm)

Grade Classification	Coated Carbide					Cemented Carbide	Cermet	DLC	SUMIDIA	Fig			
	P	M	K	N	H	P	P	N	N				
High-speed/Light Cutting	P	M	K	N	H			N	N				
General-purpose	P	M	K	N	H		P	N	N				
Roughing	P	M	K	N	H		P	N	N				
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	H1	T1500A	T250A	DL1000	DA1000	DA2200
SDCH 42TR							●						
42TL													
42TR-R										●			
42TL-R													
SDC 42R								●			●		
NF-SDC 42R												●	▲
SDC 42L								●					
42TR							●						
42TL													
42TR-R										●			
42TL-R													
APW 4R									●			●	▲

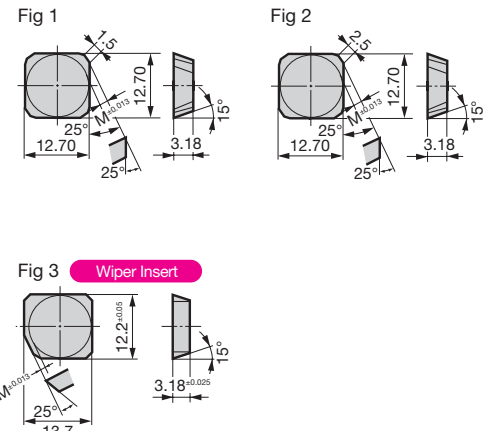

Double Screw (Common)	Size	(N·m)
	M8	8.0
Cap Screw	Size	(N·m)
	M5	5.0

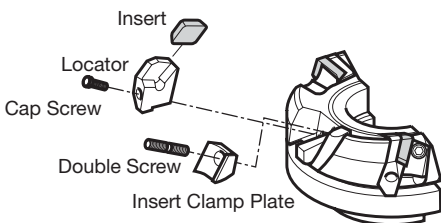

Parts

Applicable Cutter	Locator	Cap Screw	Insert Clamp Plate	Double Screw	Wrench
APG4080R				WB8-20	TH040
APG4100R	LAP40R	BXF0520R	ATW45R	WB8-22TL	TT27
Up to APG4500R				WB8-20	TH040
APG4080L	LAP40L	BXF0520R	ATW45L	WB8-22T	TT27
APG4100L				WB8-20	TH040
Up to APG4500L				WB8-22T	TT27

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	General Steel	180 to 280HB	100-125-150	0.10-0.18-0.25	A30N
	Mild Steel	≤ 180HB	120-150-180	0.10-0.18-0.25	A30N
	Die Steel	200 to 220HB	60-80-100	0.10-0.18-0.25	A30N
M	Stainless Steel	—	120-150-180	0.10-0.18-0.25	A30N
K	Cast Iron	250HB	60-90-120	0.15-0.23-0.30	H1
N	Non-Ferrous Alloy	—	300-650-1,000	0.10-0.20-0.30	H1

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


DPG 4000 type/DPGF 4000 type



Rake Angle	Radial	0°
	Axial	8°

9.5mm **75°**

Face Milling

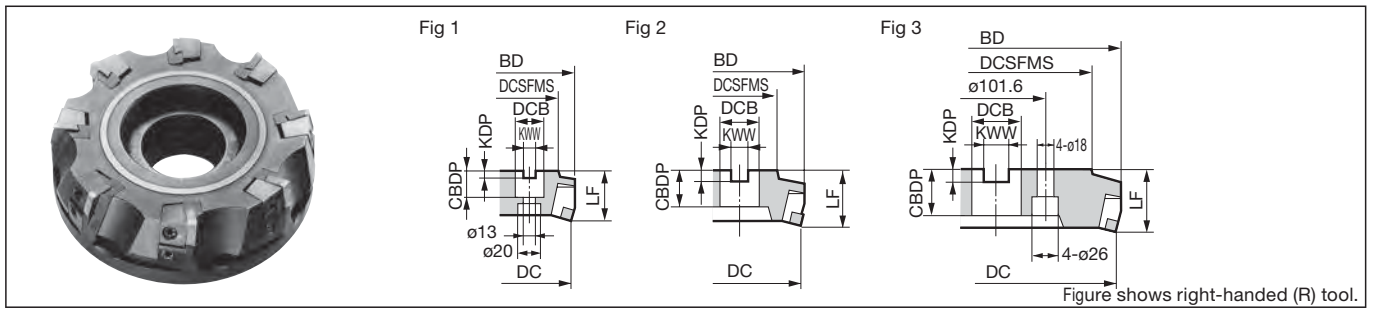

Body



Cat. No.	Stock		Dimensions (mm)										Fig
	R	L	Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Number of Teeth	Weight (kg)	
Inch	DPG 4080R/L	●	*80	90	60	50	25.4	9.5	6	25	4	1.5	1
	4100R/L	●	105	115	75	60	31.75	12.7	8	32	5	3.0	2
	4125R/L	●	125	135	75	60	38.1	15.9	10	38	6	4.0	2
	4160R/L	●	157	167	100	60	50.8	19.1	11	38	8	6.1	2
Inch	DPGF 4080R/L	●	*80	90	60	50	25.4	9.5	6	25	6	1.5	1
	4100R/L	●	105	115	75	60	31.75	12.7	8	32	8	3.0	2
	4125R/L	●	125	135	75	60	38.1	15.9	10	38	10	4.0	2
	4160R/L	●	157	167	100	60	50.8	19.1	11	38	12	6.1	2

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert

Grade Classification	Coated Carbide					Cemented Carbide				Cermets		Fig
	High-speed/Light Cutting	General-purpose		Roughing								
Process	P	M	K	M	K	P	P	K	K	P	P	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	A30	H10E	G10E	T1500A	T250A
SPCH 42R				●	●	●				●		
42L				●	●	●				●		
42TR	●	●	●				●		●			
42TL		●					●					
42TR-R										●	●	
42TL-R										●	●	
SPMN 422										●	●	
423				●	●					●	●	
SPG 422										●	●	
423										●	●	
DPW 500R											●	
500L											●	

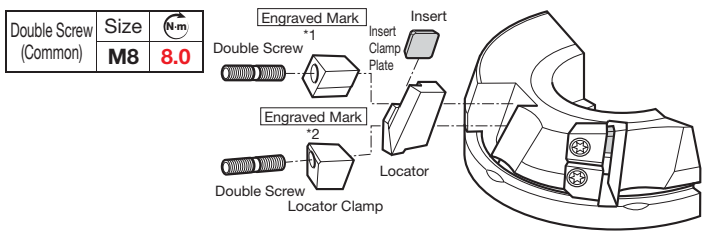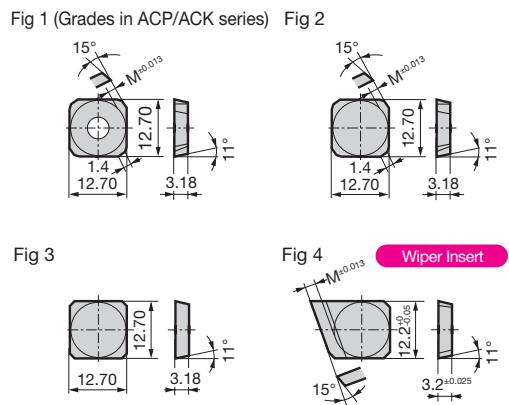

- *1 Engraved Mark: T40R,T40L,T41R,T41L,T42R,T42L, TF80R,TF80L,TF41R,TF41L
- *2 Engraved Mark: L40R,L40L,L41R,L41L,L42R,L42L, LF80R,LF80L,LF41R,LF41L

Parts

Applicable Cutter	Locator	Locator Clamp for DPG	Locator Clamp for DPGF	Insert Clamp for DPG	Insert Clamp for DPGF	Double Screw	Wrench
DPG(F)4080R	GL40R	GLW40R	GLWF80R	GTW40R	GTWF80R	WB8-22T	TT27
DPG(F)4100R		GLW41R	GLWF41R	GTW41R	GTWF41R	WB8-30T	
Up to DPG(F)4160R		GLW42R	—	GTW42R	—		
DPG4200R		GLW40L	GLWF80L	GTW40L	GTWF80L	WB8-22T	
DPG(F)4080L	GL40L	GLW41L	GLWF41L	GTW41L	GTWF41L	WB8-30T	TT27
DPG(F)4100L		GLW42L	—	GTW42L	—		
Up to DPG(F)4160L		GLW40L	GLWF80L	GTW40L	GTWF80L	WB8-22T	
DPG4200L		GLW41L	GLWF41L	GTW41L	GTWF41L	WB8-30T	


Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)	Feed Rate fz (mm/t)	Insert Grades
P	General Steel	180 to 280HB	100-125-150	0.10-0.15-0.20	ACP200
	Mild Steel	≤ 180HB	100-175-250	0.10-0.18-0.25	ACP200
	Die Steel	200 to 220HB	80-120-160	0.10-0.15-0.20	ACP200
M	Stainless Steel	—	80-120-160	0.10-0.15-0.20	ACP300
K	Cast Iron	250HB	80-140-200	0.10-0.15-0.20	ACK200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Milling Cutters
Face Milling
Shoulder Milling
High-Feed
Multi-purpose
Radius
Radial/3D Profiling
Side Cutters
T-Slot Cutters
Chamfering
Non-Ferrous Metals
Cast Iron, High-Speed

DPG 5000 type



Face Milling

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

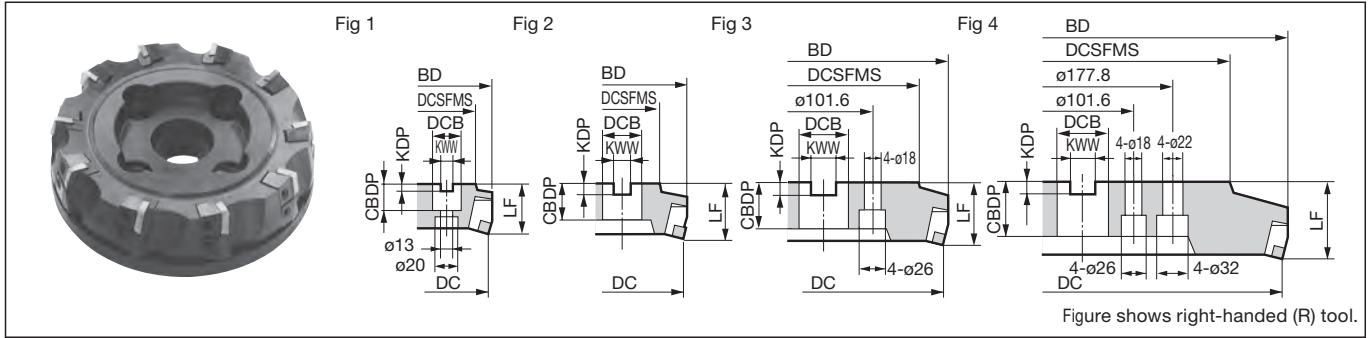


Figure shows right-handed (R) tool.

Body

Dimensions (mm)

Cat. No.	Stock		Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDDP	Number of Teeth	Weight (kg)	Fig
	R	L											
DPG 5080R/L			82	90	60	50.5	25.4	9.5	6	25	4	1.5	1
5100R/L			107	115	75	60.5	31.75	12.7	8	32	5	3.0	2
5125R/L			127	135	75	60.5	38.1	15.9	10	38	6	4.0	2
5160R/L			159	167	100	60.5	50.8	19.1	11	38	8	6.1	2
5200R/L			202	210	130	60.5	47.625	25.4	13.5	38	10	10.0	3
5250R/L			252	260	200	70.5	47.625	25.4	13.5	52	12	19.7	3
5315R/L			317	325	240	70.5	47.625	25.4	13.5	52	14	33.0	3
5400R/L			402	410	300	80.5	63.5	25.4	13.5	57	20	60.0	4
5500R/L			502	509	400	80.5	63.5	25.4	13.5	57	24	92.0	4


Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).


Insert

Dimensions (mm)

Grade Classification	Coated Carbide					Cemented Carbide				Cermet	Fig	
	P	M	K	M	M	P	P	K	K	P		
High-speed/Light Cutting	P		K		M					P		
General-purpose		M	K			P	P	K	K		P	
Roughing		M	K									
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	A30	H10E	G10E	T1500A	T250A
SPCH 53R-R				●	●	●				●		
53L-R										●		
53TR-R	●	●					●		●		●	●
53TL-R		●					●		●			
SPMN 532								●	●			
533								●	●			
GW 500R										●		
500L										●		

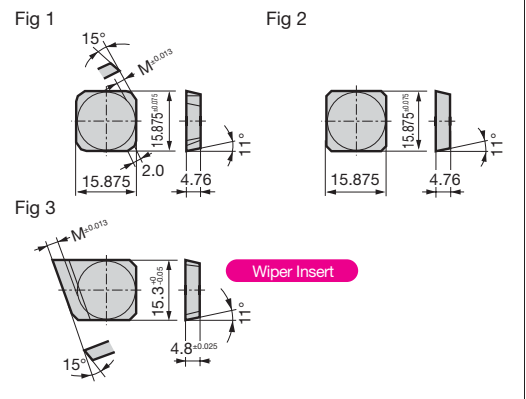

Double Screw (Common)	Size	Nm
	M8	8.0

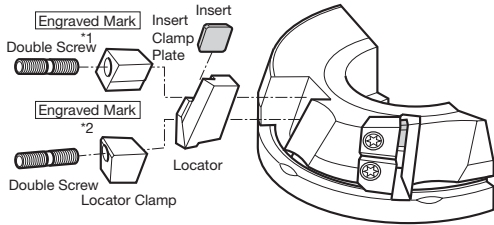

- *1 Engraved Mark: T50R, T50L, T51R, T51L, T52R, T52L
- *2 Engraved Mark: L50R, L50L, L51R, L51L, L52R, L52L

Parts


Applicable Cutter	Locator	Locator Clamp	Insert Clamp Plate	Double Screw	Wrench
DPG5080R	GL50R	GLW50R	GTW50R	WB8-22T	TT27
DPG5100R		GLW51R	GTW51R	WB8-30T	
Up to DPG5160R		GLW52R	GTW52R		
DPG5200R					
Up to DPG5500R					
DPG5080L	GL50L	GLW50L	GTW50L	WB8-22T	TT27
DPG5100L		GLW51L	GTW51L	WB8-30T	
Up to DPG5160L		GLW52L	GTW52L		
DPG5200L					
Up to DPG5500L					

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/i)		Insert Grades
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
P	General Steel	180 to 280HB	100-125-150	0.10-0.15-0.20	ACP200		
	Mild Steel	≤ 180HB	100-175-250	0.10-0.18-0.25	ACP200		
	Die Steel	200 to 220HB	80-120-160	0.10-0.15-0.20	ACP200		
M	Stainless Steel	—	80-120-160	0.10-0.15-0.20	ACP300		
K	Cast Iron	250HB	80-140-200	0.10-0.15-0.20	ACK200		

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

MEMO

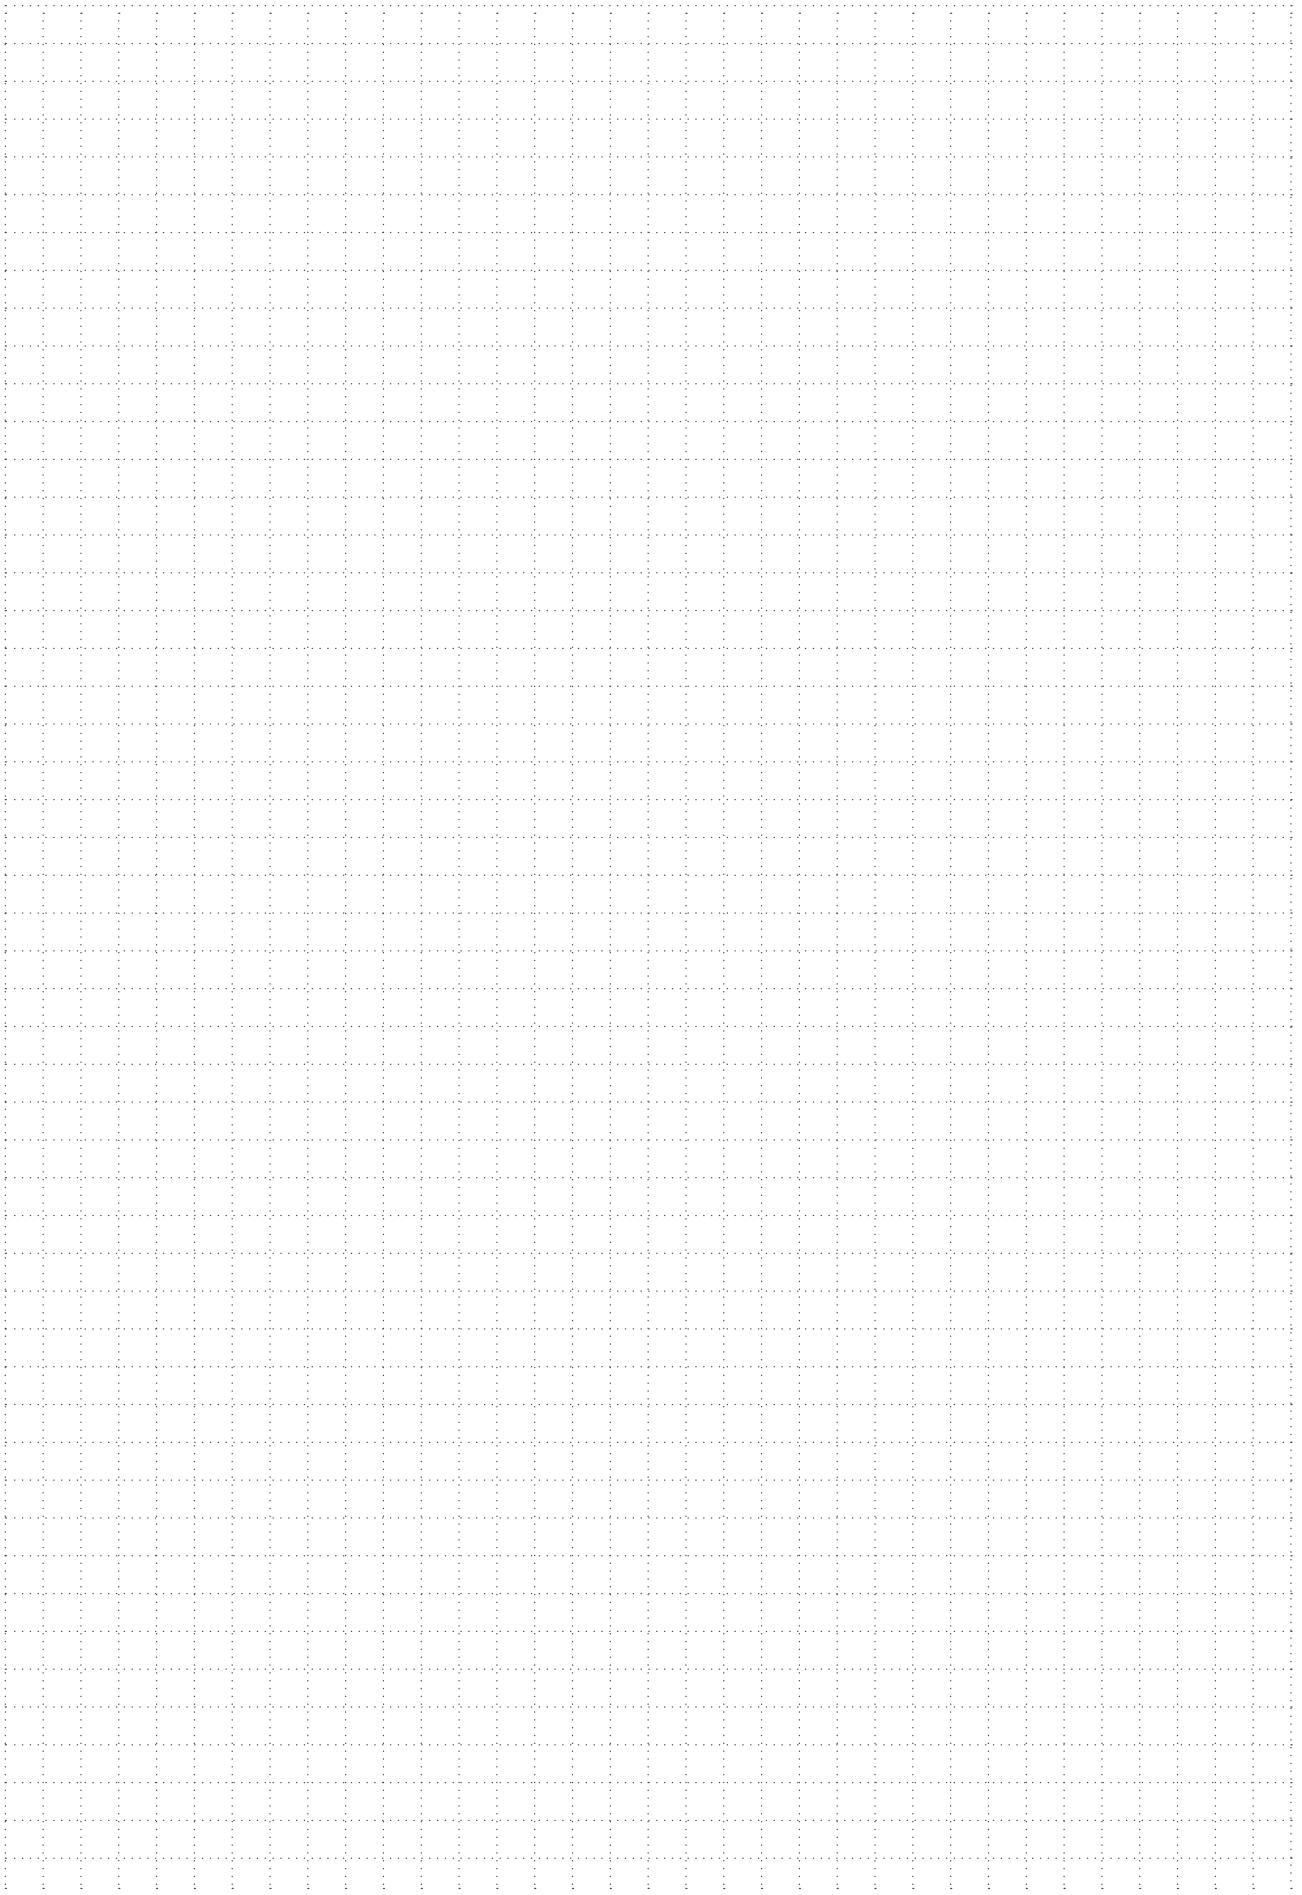



Expansion



■ Features

● Supports A Variety of Machining Operations

A lineup of cutter sizes from $\phi 14$ to $\phi 160$ mm which enable large ramping angles. 28 repeater type items are now available in addition to the modular type and short shank type.

● Excellent Machining Quality

With a combination of optimised cutting edge shape and high-precision molding technology, superb wall accuracy and surface finish quality are achieved.

● Excellent Sharpness with Low Cutting Force

Reducing machining noise and suppressing burrs, the lineup includes ground type inserts with a focus on sharpness.

● Applicable to Various Work Materials

In addition to the general-purpose grade ACU2500, the new-generation coated carbide grades XCU2500/XCK2000 are available. Applicable to various work materials such as steel, stainless steel, cast iron, exotic alloys, and more.

■ Product Range (Standard)

Type	Cat. No.	Dia. (mm)																		
		$\phi 14$	$\phi 16$	$\phi 18$	$\phi 20$	$\phi 22$	$\phi 25$	$\phi 26$	$\phi 28$	$\phi 30$	$\phi 32$	$\phi 35$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	$\phi 125$	$\phi 160$	
Shell	WEZ 11000RS												4 6	5 7	6 8	7 10	9 12			
	WEZ 11000R <small>Inch</small>															7 10	9 12			
	WEZ 17000RS												3 4	3 5	4 6	4 7	5 8	6 11	9 12	8 10
	WEZ 17000R <small>Inch</small>															4 7	5 8	6 11	9 12	8 10
Shank	WEZ 11000E	1	2*	2	2 3*	3	2 3*	4	4	2 3 4 5*	5	2 4 6	5 7	8	10					
	WEZ 11000ES <small>For multi-tasking machines</small>	1	2*	3*	4*															
	WEZ 11000EL	1	2*	2	2*	2	2* 3	2	2	2* 3	2 3	2	2	3						
	WEZ 17000E					2*	2	2	3	2 3*	3	3 4	3 5	4 6*	7					
	WEZ 17000ES <small>For multi-tasking machines</small>					2				3										
Modular	WEZ 17000EL					2		2	2	2* 3	2	2 3 4	3 5*	4 6*						
	WEZ 11000M		2	2	2 3	3	2 3 4	4 5	2 4 5	2 3 4 5	2 5	2 4 5 6								
	WEZ 17000M					2 3		2	2 3	2 3 4	2 3	2 3 4								

Number in ●●● shows the number of teeth Inch Inch Bore *mark: Different diameter shanks in stock

Modular type H256

■ Product Range (Repeater) *New*

Type	Cat. No.	Dia. (mm)												
		$\phi 20$	$\phi 25$	$\phi 30$	$\phi 32$	$\phi 35$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$				
Shell	WEZR 11000RS						4	4						
	WEZR 17000RS							2 3 4	3 4 5	5				
Shank	WEZR 11000E	1 2	2	2	2 3	3	3 4							
	WEZR 17000E						2 3	2 3						
Modular	WEZR 11000M				3									
	WEZR 17000M						3							

Number in ●●● represent the effective number of teeth

Modular type H260

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling


Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

■ Supports Ramping/Helical Milling/Plunge Milling
Applicable to various applications!

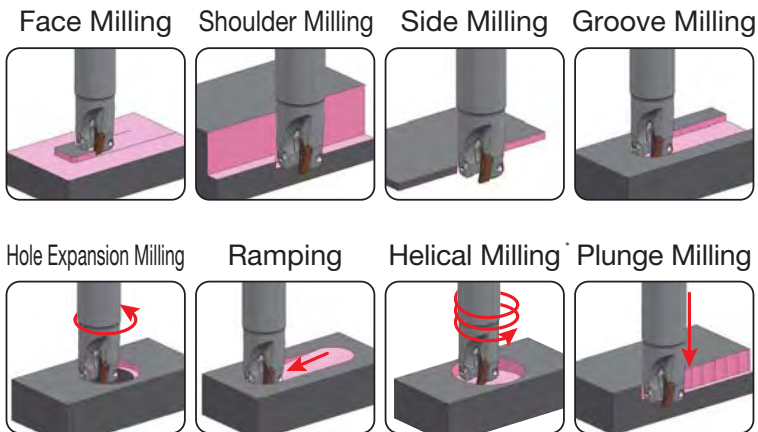

*Helical milling is not recommended for WEZR type products.

■ Optimised Body Design
Wide Guide Face
for Stable Insert Clamping




■ Chipbreaker Selection

Work Material	P Steel, M Stainless Steel, K Cast Iron, S Heat-resistant Alloy, Titanium Alloy, H Hardened Steel					N Non-Ferrous Metal
Applications	Light Cutting	General-purpose to Interrupted Milling	Heavy Cutting	Light Cutting	Light Cutting	Non-Ferrous Metals
Features	Low-rigidity Machining	Standard	Heavy Interrupted Cutting Hardened Steel	Medium Finishing Burr Prevention	High-precision Machining High Wall Surface Squareness	Low Cutting Force
Chipbreaker	L type	G type	H type	F type	P type	S type
Cutting Edge Cross Section	11 type	Not Available	0.05mm 28°	0.15mm 20°	28°	28°
	17 type	0.05mm 28°	0.15mm 20°	0.2mm 10°	28°	28°

■ Insert Size Comparison



■ Chipbreaker Selection Guide

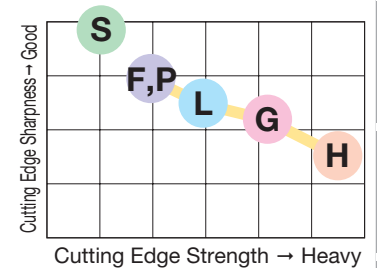

■ Product Range (Insert)


●: Standard stocked item

Cat. No.	Corner Radius (mm)														
	R0.2	R0.4	R0.5	R0.8	R1.0	R1.2	R1.6	R2.0	R2.4	R3.0	R3.2	R4.0	R5.0	R6.4	
11 type	M Class	AOMT11T3○○PEER-G	●	●	●	●	●	●	●	●	●	●			
		AOMT11T3○○PEER-H		●		●		●							
	E Class	AOET11T3○○PEER-F	●	●	●	●	●	●	●	●	●	●			
		AOET11T3○○PEER-P16	●	●	●	●	●	●							
		AOET11T3○○PEER-P20	●	●	●	●	●	●							
		AOET11T3○○PEER-P25	●	●	●	●	●	●							
		AOET11T3○○PEFR-S	●	●	●	●	●	●	●	●	●	●			
17 type	M Class	AOMT1705○○PEER-L	●	●		●		●							
		AOMT1705○○PEER-G	●	●	●	●	●	●	●	●	●	●	●	●	●
		AOMT1705○○PEER-H		●		●		●							
	E Class	AOET1705○○PEER-F	●	●	●	●	●	●	●	●	●	●	●	●	●
		AOET1705○○PEER-P25	●	●	●	●	●	●							
		AOET1705○○PEER-P32	●	●	●	●	●	●							
		AOET1705○○PEFR-S	●	●	●	●	●	●	●	●	●	●	●	●	●

P type chipbreaker Cat. No. is specific to a range of cutter diameters. For details, see P type Chipbreaker Selection on H56.



■ Cutting Performance

● Good Wall Accuracy

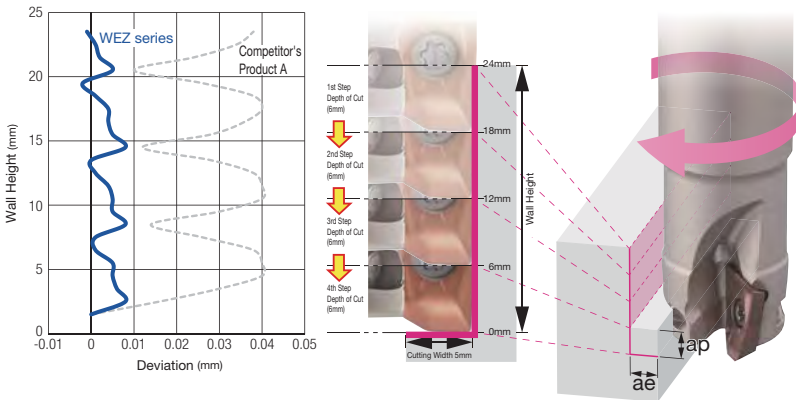

Machine : Vertical Machining Centre BT40, Work Material: S50C
 Tool : WEZ 11020E03 (ø20, 3 teeth)
 Insert : AOMT 11T308PEER-G (ACU2500)
 Cutting Conditions : vc = 150m/min, fz = 0.15mm/t, ap = 6mm x 4 Passes, ae = 5mm, Dry



● Lower Cutting Force Helps Reduce Machining Noise ● Excellent Surface Quality

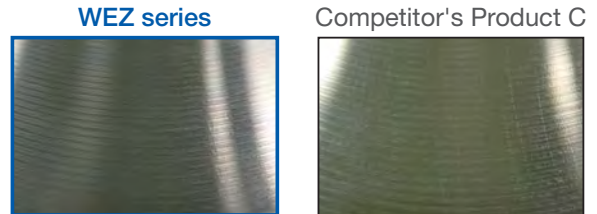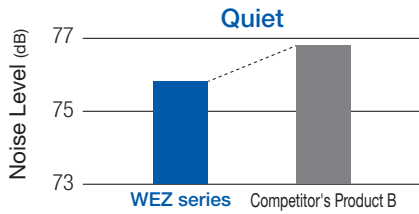


Machine : Vertical Machining Centre BT40, Work Material: S50C
 Tool : WEZ 11020E03 (ø20, 3 teeth)
 Insert : AOMT 11T308PEER-G (ACU2500)
 Cutting Conditions : vc = 150m/min, fz = 0.15mm/t, ap = 8mm, ae = 5mm, Dry

Machine : Vertical Machining Centre BT50, Work Material (SCM440)
 Tool : WEZ 17100RS08 (ø100, 8 teeth)
 Insert : AOMT 170508PEER-G (ACU2500)
 Cutting Conditions : vc = 250m/min, fz = 0.15mm/t, ap = 2mm, ae = 85mm, Dry

● Good Wall Accuracy (for Multi-tasking Machines)

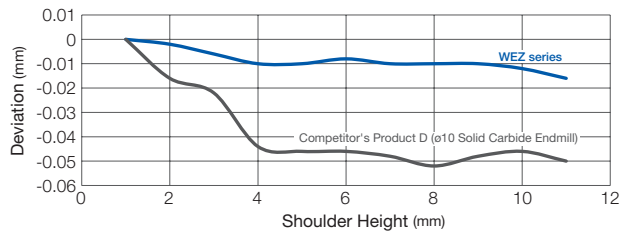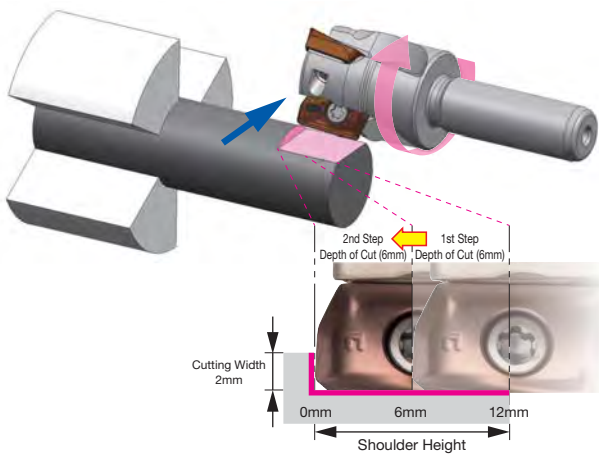

Machine: Multi-tasking Machine, Work Material: SUS304 ø16 Round Bar
 Tool: WEZ11020ES03-10 (ø20, 3 teeth)
 Insert: AOET11T308PEER-F (ACU2500)
 Cutting Conditions: vc = 100m/min, fz = 0.08mm/t, ap = 6mm x 2 Passes, ae = 2mm, Wet

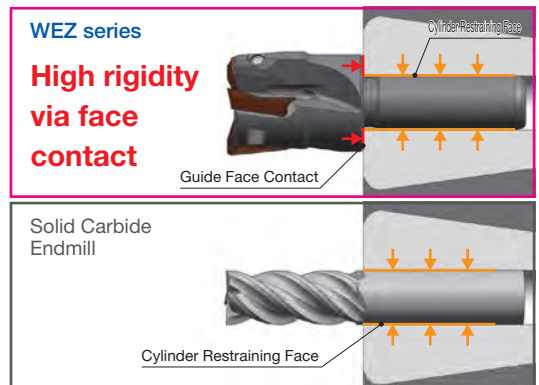

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters



Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

● Excellent machine surface quality (for multi-tasking machines)

Larger tool diameter than solid carbide endmills enables reduced number of passes for high-efficiency machining!
Good wall accuracy and machined surface quality, eliminating the finishing process!

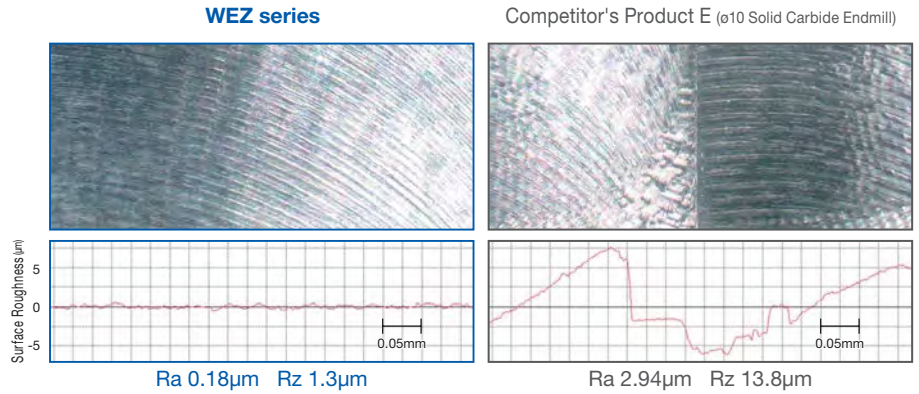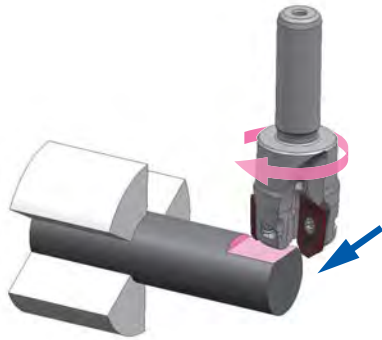


Machine	: Multi-tasking Machine, Work Material: SUS304 ø16 Round Bar Tool: WEZ11020ES03-10 (ø20, 3 teeth)
Insert	: AOET11T308PEER-F (ACU2500)
Cutting Conditions	: WEZ type vc = 100m/min, fz = 0.05mm/t, ap = 2mm, ae = 12mm Wet Competitor's Product E vc = 100m/min, fz = 0.05mm/t, ap = 2mm, ae = 6mm x 2 Passes Wet (Solid Carbide Endmill)

■ High-precision ground type insert with excellent sharpness


● Ground finish on cutting edge and guide face

The cutting edge, as well as the guide faces are ground finish to minimize corner variations when mounted on the body. Stable edge run-out accuracy and machining quality can be realized!



Precautions for Mounting Inserts

- (1) Clean the mounting seat surface and contact parts.
- (2) While pressing the insert firmly against the seat surface, fasten the screw with the included wrench.
- (3) Apply Anti-seizure Cream to the screw and tighten at the recommended torque.
- (4) After tightening, check that there are no gaps on the seat surface.

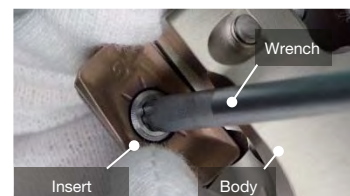

Lineup of Chipbreakers for Ground type Inserts

F type Chipbreaker - Emphasises Edge Sharpness



- Sharpness from ground finish enables burr control
- Good wall accuracy with all cutter diameters




Machine : Vertical Machining Centre BT50, Work Material: SUS304
 Tool : WEZ 11050RS07 (ø50, 7 teeth)
 Insert : AOET 11T308PEER-F (ACU2500)
 Cutting Conditions : $vc = 120\text{m/min}$, $fz = 0.12\text{mm/t}$, $ap = 1\text{mm}$, $ae = 30\text{mm}$, Dry

P type Chipbreaker - Achieves Wall Squareness Equivalent to Using Solid Endmills



- High-precision type with cutting edge shape optimised for each cutter diameter while maintaining the F type chipbreaker's sharpness
- Enables wall squareness equal to using solid endmills, through cutting edge shape optimisation for each cutter diameter

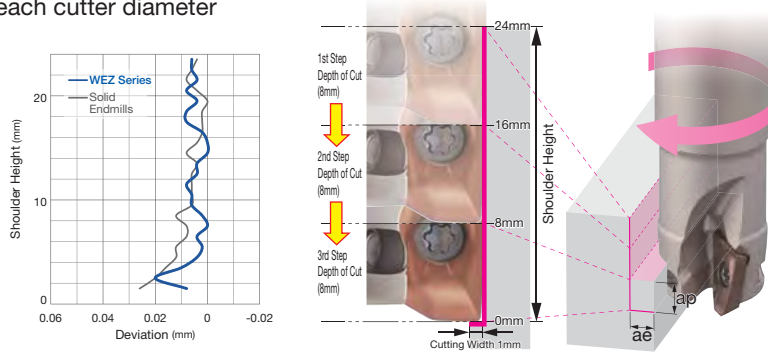

Machine : Vertical Machining Centre BT50, Work Material: S50C
 Tool : WEZ 11020E03 (ø20, 3 teeth)
 Insert : AOET 11T308PEER-P20 (ACU2500)
 Cutting Conditions : $vc = 150\text{m/min}$, $fz = 0.1\text{mm/t}$, $ap = 8\text{mm} \times 3$ Passes, $ae = 1\text{mm}$, Dry

P type Chipbreaker Selection Guide

Cat. No.	Dia. (mm)										
	ø14	ø16	ø18	ø20	ø22	ø25	ø28	ø30	ø32	ø35	ø40 and above
AOET11T308PEER-P00	-P16	-P20	Not applicable		-P25	Not applicable					
AOET170508PEER-P00	Not applicable				-P25	-P32		Not applicable			

S type Chipbreaker - Sharp-Edged Breaker for Non-Ferrous Metals with Excellent Adhesion Resistance



- Suppresses adhesion with rake face lapping
- DLC Coat inserts available for further improved adhesion resistance



Machine : Vertical Machining Centre BT30, Work Material: ADC12
 Tool : WEZ 11020E03 (ø20, 3 teeth)
 Insert : AOET 11T308PEFR-S (H20)
 Cutting Conditions : $vc = 350\text{m/min}$, $fz = 0.1\text{mm/t}$, $ap = 3\text{mm}$, $ae = 10\text{mm}$, Dry

Grade Application Range

New-generation coated carbide grades **XCU2500/XCK2000** now available!
Enhanced lineup of coated grades in addition to cemented carbide and cermet for milling steel, stainless steel, cast iron, and aluminum alloy.

Work Material	Finishing to Light Cutting	Medium Cutting	Rough to Heavy Cutting
P Steel	Coated Carbide ACU2500 XCU2500 ACP2000	ACP3000	
	Cermet T2500A		
M Stainless Steel	Coated Carbide ACU2500 XCU2500 ACM200	ACM300	
	Coated Carbide ACU2500 XCU2500 XCK2000 ACK2000 ACK3000		
N Non-Ferrous Metal	Coated Carbide DL2000		
	Cemented Carbide H20		

The letters "C" and "P" at the end of each grade indicate the coating type. ▽ : CVD ▲ : PVD

Grade Features

New coating technology that realises absolute stability
ABSOTECH™ (Absolute Technology)

ABSOTECH CVD

- Special Surface Treatment**
Suppresses thermal cracking by introducing high compressive stress, resulting in chipping resistance more than twice that of conventional types
- Crystal Orientation Control Al₂O₃**
By controlling the growth direction, Al₂O₃ is reinforced for crater wear resistance more than twice that of conventional types
- High Hardness TiCN**
Increased TiCN hardness by using a C-rich composition for flank wear resistance more than twice that of conventional types

Applicable Grades: ACP2000, ACK2000

ABSOTECH PVD

- New Super Multi-Layered Structure**
Higher hardness and twice the conventional wear resistance due to a fine crystal structure AlTiCrBN-based nano-layered coating
- High Adhesion Strength**
Significantly improved coating adhesion has more than twice the chipping resistance as conventional coatings.

Applicable Grades: ACU2500, ACP3000, ACK3000

ABSOTECH X CVD

Pure Cubic Crystal AlTiN with High Al Content
With proprietary structural control technology, differently composed layers of AlTiN are stacked at the nanometre level. With a high-Al composition containing over 80% Al on average, it also maintains a cubic crystalline structure to achieve excellent thermal resistance and high hardness. Vastly improved wear resistance.

Special Surface Treatment
Proprietary surface treatment introduces high compression stress to the coating, suppressing the development of cracks. Greatly improved fracture and thermal crack resistance.

Applicable Grades: XCU2500, XCK2000

Grade Characteristic Values

CVD

Work Material	Grade	Hardness (HRA)	TRS (GPa)	Coating type	Coating Thickness (µm)	Features	Old Grade
P Steel	ACP2000	89.5	3.2	Absotech	10	· For high-speed machining of steel · Stable long tool life in high-speed machining is realised by adopting a tough carbide substrate and a new coating with excellent thermal crack resistance	ACP100
	XCU2500	89.5	3.2	Absotech X	6	· General-purpose grade for a wide variety of materials such as steel, cast iron and stainless steel · New coating combining wear and fracture resistance realises long tool life in medium-speed to high-speed machining	—
M Stainless Steel	ACM200	89.8	3.4	Super FF Coat	6	· For machining high-hardness stainless steel · Adopts a newly developed high-strength cemented carbide substrate with excellent wear resistance and thermal resistance, realizing outstanding stability when machining hardened stainless steel	AC230
K Cast Iron	ACK2000	91.7	3.1	Absotech	10	· For high-speed cast iron milling · Stable long tool life in high-speed machining is realised by adopting a tough carbide substrate and a new coating with excellent thermal resistance	ACK100 ACK200
	XCK2000	91.7	2.5	Absotech X	6	· For high-speed cast iron milling · Along with a high-hardness carbide substrate, the new coating combining wear and fracture resistance realises superb long tool life in medium-speed to high-speed machining	—

PVD

Work Material	Grade	Hardness (HRA)	TRS (GPa)	Coating type	Coating Thickness (µm)	Features	Old Grade
P Steel	ACU2500	91.6	3.8	Absotech	3	· General-purpose grade supporting steel, stainless steel, and cast iron machining · Adopts a carbide substrate with excellent fracture resistance and wear resistance, plus a new coating with excellent wear resistance and chipping resistance, realising stable long tool life with various work material grades	—
	ACP3000	89.5	3.2	Absotech	3	· Our 1st recommended grade for milling steel · Carbide substrate with excellent thermal crack resistance, plus a new coating with excellent wear resistance and chipping resistance, realises stable long tool life over a wide range of cutting conditions	ACP200 ACP300
M Stainless Steel	ACM300	89.8	3.4	(New) Super ZX Coat	3	· Our 1st recommended grade for milling stainless steel · Adopts a high-strength carbide substrate and super multi-layered coating for next-level wear resistance and fracture resistance	—
K Cast Iron	ACK3000	91.7	3.1	Absotech	3	· Our 1st recommended grade for milling cast iron · Adopts a high thermal conductivity carbide substrate and a new coating with excellent wear resistance and chipping resistance, realising stable long tool life over a wide range of cast iron machining operations	ACK300
N Non-Ferrous Metal	DL2000	91.6	3.8	AURORA Coat (DLC)	0.5	· Grade for milling non-ferrous metal, utilising DLC coat with a low coefficient of friction and excellent adhesion resistance	—

Cermet

Work Material	Grade	Hardness (HRA)	TRS (GPa)	Coating type	Coating Thickness (µm)	Features	Old Grade
P Steel	M Stainless Steel	T2500A	91.8	2.4	—	· For finishing of steel and stainless steel · Fine, uniform grain structure greatly improves toughness, realising long tool life and excellent surface finishes	T250A

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters

T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

■ Maximum Allowable Spindle Speed

WEZ11

Dia. DC(mm)	n max(min ⁻¹)	Dia. DC(mm)	n max(min ⁻¹)
14	12,000(7,500)	32	17,200
16	29,000	35	16,250
18	26,150	40	14,950
20	24,000	50	13,100
22	22,300	63	11,500
25	20,300	80	10,050
28	18,800	100	8,900
30	17,950		

WEZ17


Dia. DC(mm)	n max(min ⁻¹)	Dia. DC(mm)	n max(min ⁻¹)
25	15,700	80	7,250
28	14,350	100	6,400
30	13,650	125	5,650
32	13,000	160	4,950
35	12,200		
40	11,100		
50	9,600		
63	8,350		

*The parentheses above refer to the use of WEZ11014EL01.


*The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force.

■ Ramping/Helical Milling Upper Limit

Ramping



Helical Milling



WEZ11 type

Dia. DC (mm)	Max. Ramping Angle RMPX(°)	Helical Milling					
		Max. Machining Dia. (mm)	Max. Pitch (mm/rev)	Standard Diameter (mm)	Max. Pitch (mm/rev)	Min. Machining Dia. (mm)	Max. Pitch (mm/rev)
14	8.0	25.3	5.0	23.1	3.4	19.0	1.5
16	10.5	29.3	7.6	27.0	5.6	21.7	1.5
18	8.1	33.3	6.7	30.9	5.0	25.2	1.4
20	6.5	37.3	6.0	34.9	4.6	29.1	1.3
22	5.3	41.3	5.4	38.8	4.3	32.9	1.3
25	4.1	47.3	4.8	44.8	3.9	38.9	1.3
28	3.4	53.3	4.4	50.7	3.6	44.9	1.3
30	3.0	57.3	4.2	54.7	3.5	48.8	1.3
32	2.7	61.3	4.0	58.7	3.3	52.8	1.2
35	2.3	67.3	3.8	64.6	3.1	58.8	1.2
40	1.8	77.3	3.4	74.6	2.9	68.8	1.2
50	1.2	97.3	3.0	94.6	2.6	88.8	1.1
63	0.8	123.3	2.8	120.5	2.5	114.7	1.1
80				Not recommended			
100				Not recommended			


*The table above shows values with corner radius 0.8mm. Helical milling is not recommended for WEZR type products.

WEZ17 type

Dia. DC (mm)	Max. Ramping Angle RMPX(°)	Helical Milling					
		Max. Machining Dia. (mm)	Max. Pitch (mm/rev)	Standard Diameter (mm)	Max. Pitch (mm/rev)	Min. Machining Dia. (mm)	Max. Pitch (mm/rev)
25	10.8	47.3	13.0	41.0	8.3	33.1	1.8
28	8.1	53.3	11.1	46.9	7.5	39.0	1.8
30	7.0	57.3	10.2	50.9	7.0	43.0	1.8
32	6.1	61.3	9.5	54.9	6.7	47.0	1.7
35	5.1	67.3	8.7	60.8	6.2	53.0	1.7
40	4.0	77.3	7.7	70.8	5.7	63.0	1.7
50	2.5	97.3	6.5	90.7	5.0	83.0	1.6
63	1.8	123.3	5.6	116.7	4.5	109.0	1.6
80	1.2	156.0	5.0	149.4	4.1	141.8	1.5
100	0.9	197.3	4.7	190.7	4.0	183.1	1.5
125				Not recommended			
160				Not recommended			


*The table above shows values with corner radius 0.8mm. Helical milling is not recommended for WEZR type products.

■ Plunge Cutting Upper Limit



	Max. ae (mm)
WEZ11 type	3
WEZ17 type	5

■ Precautions for Helical Milling




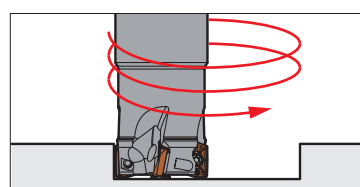


- For helical milling, if the work diameter is smaller than the standard diameter, there will be a centre uncut portion.
- A prepared centre hole should be made.
- Above the standard diameter, this portion can be removed by traverse cutting with the same cutter.

WEZ 11000R(S) type



Rake Angle	Radial	-7° to -11°	10mm	90°
	Axial	14° to 15°		



Body (Shell type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Bolt D3	Number of Teeth	Weight (kg)	Fig
WEZ 11040RS04	●	40	33	40(39.7)	16	8.4	5.6	18	14	9	—	4	0.21	1
11040RS06	●	40	33	40(39.7)	16	8.4	5.6	18	14	9	—	6	0.20	1
11050RS05	●	50	41	40(39.7)	22	10.4	6.3	20	18	11	—	5	0.32	1
11050RS07	●	50	41	40(39.7)	22	10.4	6.3	20	18	11	—	7	0.31	1
11063RS06	●	63	50	40(39.7)	22	10.4	6.3	20	18	11	—	6	0.58	1
11063RS08	●	63	50	40(39.7)	22	10.4	6.3	20	18	11	—	8	0.57	1
11080RS07	●	80	55	50(49.7)	27	12.4	7	22	20	14	—	7	1.08	1
11080RS10	●	80	55	50(49.7)	27	12.4	7	22	20	14	—	10	1.07	1
11100RS09	●	100	70	50(49.7)	32	14.4	8	32	46	—	—	9	1.57	3
11100RS12	●	100	70	50(49.7)	32	14.4	8	32	46	—	—	12	1.56	3
WEZ 11080R07	●	80	55	50(49.7)	25.4	9.5	6	25	20	14	—	7	1.09	1
11080R10	●	80	55	50(49.7)	25.4	9.5	6	25	20	14	—	10	1.08	1
11100R09	●	*100	70	63(62.7)	31.75	12.7	8	32	46	27	18	9	2.12	2
11100R12	●	*100	70	63(62.7)	31.75	12.7	8	32	46	27	18	12	2.10	2

The LF dimensions in parentheses are dimensions using RE = 3.0/3.2 insert.

When using RE = 3.0/3.2 inserts, the maximum depth of cut is 9.5mm.

Take note of the cutter mounting size (DCB) when selecting a cutter. Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	1.5 TRDR08IP	SUMI-P

Identification Code

WEZ 11 050 R S 07

Series Code Insert Size Dia. Feed Direction Metric Bore Number of Teeth

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.

Modify the C chamfering portion.

WEZ11 type

Reworking guidelines

- Corner radius = 2.4: C1 (AOMT11T324PEER)
- Corner radius = 3.0: C2.5 (AOMT11T330PEER)
- Corner radius = 3.2: C2.5 (AOMT11T332PEER)

Standard: R1.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed

Insert

Dimensions (mm)

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet			
	High-speed/Light Cutting													
	General-purpose													
Process	Roughing													
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A	Corner Radius RE	Fig
AOMT 11T302PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.2	1
11T304PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.4	1
11T305PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	0.5	1
11T308PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
11T310PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	1.0	1
11T312PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
11T316PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
11T320PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	2.0	1
11T324PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	2.4	1
11T330PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	3.0	2
11T332PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	3.2	2
AOMT 11T304PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
11T308PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
11T312PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
11T316PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
AOET 11T302PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
11T304PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
11T305PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
11T308PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
11T310PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
11T312PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
11T316PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.6	1
11T320PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.0	1
11T324PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.4	1
11T330PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.0	2
11T332PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.2	2
AOET 11T302PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.2	1
11T304PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.4	1
11T305PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.5	1
11T308PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
11T310PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.0	1
11T312PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.2	1
11T316PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.6	1
11T320PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	2.0	1
11T324PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	2.4	1
11T330PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	3.0	2
11T332PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	3.2	2

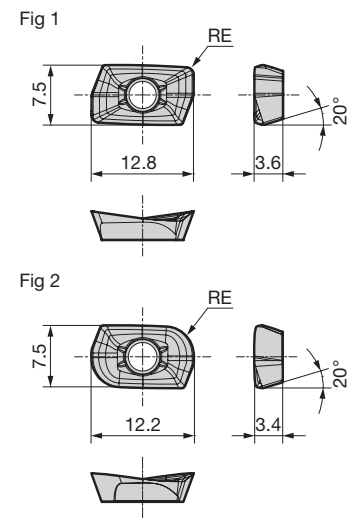

-G: General-purpose, -H: Strong Edge, -F: Medium Finishing,
-P16/-P20/-P25: High-precision Machining, -S: Non-Ferrous Metals.


Recommended Cutting Conditions H58

Maximum Allowable Spindle Speed H59

Precautions for Mounting Inserts H55

- Milling Cutters
- Face Milling
- Shoulder Milling
- High-Feed
- Multi-purpose
- Radius
- Radial/3D Profiling
- Side Cutters T-Slot Cutters
- Chamfering
- Non-Ferrous Metals
- Cast Iron, High-Speed

WEZ 17000R(S) type

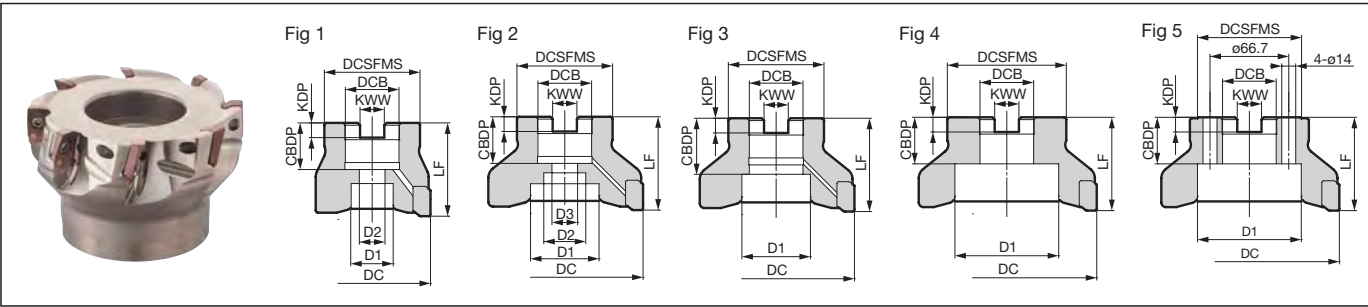

Body (Shell type)

													Dimensions (mm)		
Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Bolt D3	Number of Teeth	Weight (kg)	Fig	
WEZ 17040RS03	●	40	33	40(39.3)	16	8.4	5.6	18	14	9	—	3	0.19	1	
17040RS04	●	40	33	40(39.3)	16	8.4	5.6	18	14	9	—	4	0.16	1	
17050RS03	●	50	41	40(39.3)	22	10.4	6.3	20	18	11	—	3	0.30	1	
17050RS05	●	50	41	40(39.3)	22	10.4	6.3	20	18	11	—	5	0.26	1	
17063RS04	●	63	50	40(39.3)	22	10.4	6.3	20	18	11	—	4	0.54	1	
17063RS06	●	63	50	40(39.3)	22	10.4	6.3	20	18	11	—	6	0.51	1	
17080RS04	●	*80	55	50(49.3)	27	12.4	7	22	20	14	—	4	1.10	1	
17080RS07	●	*80	55	50(49.3)	27	12.4	7	22	20	14	—	7	1.05	1	
17100RS05	●	100	70	50(49.3)	32	14.4	8	32	46	—	—	5	1.58	3	
17100RS08	●	100	70	50(49.3)	32	14.4	8	32	46	—	—	8	1.57	3	
17125RS06	●	125	80	63(62.3)	40	16.4	9	29	52	29	—	6	3.04	1	
17125RS09	●	125	80	63(62.3)	40	16.4	9	29	52	29	—	9	3.07	1	
17125RS11	●	125	80	63(62.3)	40	16.4	9	29	52	29	—	11	3.02	1	
17160RS08	●	160	100	63(62.3)	40	16.4	9	29	90	—	—	8	5.24	5	
17160RS10	●	160	100	63(62.3)	40	16.4	9	29	90	—	—	10	5.31	5	
17160RS12	●	160	100	63(62.3)	40	16.4	9	29	90	—	—	12	5.26	5	
WEZ 17080R04	●	*80	55	50(49.3)	25.4	9.5	6	25	20	14	—	4	1.10	1	
17080R07	●	*80	55	50(49.3)	25.4	9.5	6	25	20	14	—	7	1.06	1	
17100R05	●	*100	70	63(62.3)	31.75	12.7	8	32	46	27	18	5	2.08	2	
17100R08	●	*100	70	63(62.3)	31.75	12.7	8	32	46	27	18	8	2.07	2	
17125R06	●	125	80	63(62.3)	38.1	15.9	10	35.5	55	30	—	6	3.09	1	
17125R09	●	125	80	63(62.3)	38.1	15.9	10	35.5	55	30	—	9	3.11	1	
17125R11	●	125	80	63(62.3)	38.1	15.9	10	35.5	55	30	—	11	3.06	1	
17160R08	●	160	100	63(62.3)	50.8	19.1	11	38	72	—	—	8	5.04	4	
17160R10	●	160	100	63(62.3)	50.8	19.1	11	38	72	—	—	10	5.09	4	
17160R12	●	160	100	63(62.3)	50.8	19.1	11	38	72	—	—	12	5.04	4	

The LF dimensions in parentheses are dimensions using RE = 5.0/6.4 insert. When using RE = 5.0/6.4 inserts, the maximum depth of cut is 14.5mm. Take note of the cutter mounting size (DCB) when selecting a cutter. Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Parts

Applicable Cutter	Flat Insert Screw		Integrated Wrench	Detachable Wrench Handle Grip		Anti-seizure Cream
WEZ17040RS03 WEZ17040RS04 WEZ17050RS03 WEZ17050RS05 WEZ17063RS04 WEZ17063RS06 WEZ17080R(S)04 WEZ17080R(S)07 WEZ17100R(S)05 WEZ17100R(S)08 WEZ17125R(S)06 WEZ17125R(S)09 WEZ17125R(S)11 WEZ17160R(S)08 WEZ17160R(S)10 WEZ17160R(S)12	BFTX0409IP	3.0	—	HPS1015	TRB15IP	SUMI-P
			TRDR15IP	—	—	

Identification Code

WEZ 17 100 R S 05
 Series Code Insert Size Dia. Feed Direction Metric Bore Number of Teeth

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.



Modify the C chamfering portion.

WEZ17 type

- Reworking guidelines
- Corner radius = 2.4: C1 (AOMT170524PEER)
 - Corner radius = 3.0: C1.5 (AOMT170530PEER)
 - Corner radius = 3.2: C1.5 (AOMT170532PEER)
 - Corner radius = 4.0: C2 (AOMT170540PEER)
 - Corner radius = 5.0: C5 (AOMT170550PEER)
 - Corner radius = 6.4: C5 (AOMT170564PEER)

Standard: R1.

Insert


Dimensions (mm)

Process	Grade Classification		Coated Carbide								Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig
	High-speed/Light Cutting	General-purpose													
	Roughing														
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A			
AOMT 170502PEER-L	●												0.2	1	
170504PEER-L	●												0.4	1	
170508PEER-L	●												0.8	1	
170512PEER-L	●												1.2	1	
170516PEER-L	●												1.6	1	
AOMT 170502PEER-G	●	●											0.2	1	
170504PEER-G	●	●											0.4	1	
170505PEER-G	●												0.5	1	
170508PEER-G	●												0.8	1	
170510PEER-G	●												1.0	1	
170512PEER-G	●												1.2	1	
170516PEER-G	●	●											1.6	1	
170520PEER-G	●	●											2.0	1	
170524PEER-G	●												2.4	1	
170530PEER-G	●	●											3.0	1	
170532PEER-G	●	●											3.2	1	
170540PEER-G	●	●											4.0	1	
170550PEER-G	●	●											5.0	2	
170564PEER-G	●												6.4	2	
AOMT 170504PEER-H	●	●											0.4	1	
170508PEER-H	●												0.8	1	
170512PEER-H	●												1.2	1	
170516PEER-H	●												1.6	1	
AOET 170502PEER-F	●												0.2	1	
170504PEER-F	●												0.4	1	
170505PEER-F	●												0.5	1	
170508PEER-F	●												0.8	1	
170510PEER-F	●												1.0	1	
170512PEER-F	●												1.2	1	
170516PEER-F	●												1.6	1	
170520PEER-F	●												2.0	1	
170524PEER-F	●												2.4	1	
170530PEER-F	●												3.0	1	
170532PEER-F	●												3.2	1	
170540PEER-F	●												4.0	1	
170550PEER-F	●												5.0	2	
170564PEER-F	●												6.4	2	
AOET 170502PEFR-S										●	●		0.2	1	
170504PEFR-S										●	●		0.4	1	
170505PEFR-S										●	●		0.5	1	
170508PEFR-S										●	●		0.8	1	
170510PEFR-S										●	●		1.0	1	
170512PEFR-S										●	●		1.2	1	
170516PEFR-S										●	●		1.6	1	
170520PEFR-S										●	●		2.0	1	
170524PEFR-S										●	●		2.4	1	
170530PEFR-S										●	●		3.0	1	
170532PEFR-S										●	●		3.2	1	
170540PEFR-S										●	●		4.0	1	
170550PEFR-S										●	●		5.0	2	
170564PEFR-S										●	●		6.4	2	

-L: Low Cutting Force, -G: General-purpose, -H: Strong Edge, -F: Medium Finishing, -S: Non-Ferrous Metals.

Recommended Cutting Conditions H58 Maximum Allowable Spindle Speed H59

Precautions for Mounting Inserts H55

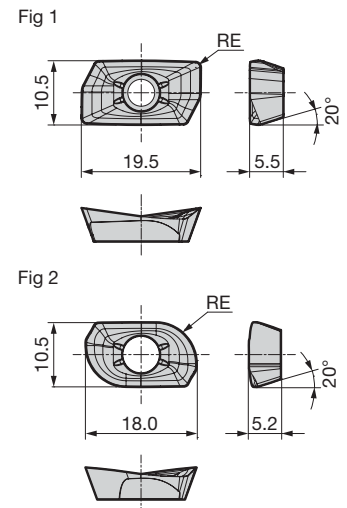

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed

WEZ 11000E type



Milling Cutters

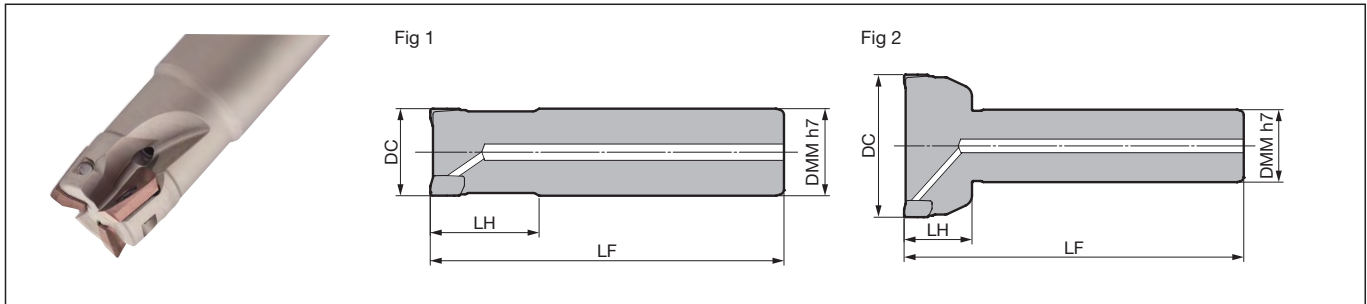

Face Milling

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEZ 11014E01	●	14	16	25(24.7)	80(79.7)	1	0.10	1
11016E02	●	16	16	25(24.7)	100(99.7)	2	0.13	1
11016E02-12	●	16	12	25(24.7)	100(99.7)	2	0.07	2
11018E02	●	18	16	25(24.7)	100(99.7)	2	0.13	2
11020E02	●	20	20	30(29.7)	110(109.7)	2	0.23	1
11020E02-16	●	20	16	30(29.7)	110(109.7)	2	0.15	2
11020E03	●	20	20	30(29.7)	110(109.7)	3	0.22	1
11020E03-16	●	20	16	30(29.7)	110(109.7)	3	0.14	2
11022E03	●	22	20	30(29.7)	110(109.7)	3	0.23	2
11025E02	●	25	25	35(34.7)	120(119.7)	2	0.40	1
11025E03	●	25	25	35(34.7)	120(119.7)	3	0.40	1
11025E03-20	●	25	20	35(34.7)	120(119.7)	3	0.26	2
11025E04	●	25	25	35(34.7)	120(119.7)	4	0.39	1
11025E04-20	●	25	20	35(34.7)	120(119.7)	4	0.26	2
11028E04	●	28	25	35(34.7)	120(119.7)	4	0.41	2
11030E04	●	30	25	40(39.7)	130(129.7)	4	0.46	2
11032E02	●	32	32	40(39.7)	130(129.7)	2	0.74	1
11032E03	●	32	32	40(39.7)	130(129.7)	3	0.73	1
11032E04	●	32	32	40(39.7)	130(129.7)	4	0.73	1
11032E05	●	32	32	40(39.7)	130(129.7)	5	0.72	1
11032E05-25	●	32	25	40(39.7)	130(129.7)	5	0.46	2
11035E05	●	35	32	40(39.7)	130(129.7)	5	0.75	2
11040E02	●	40	32	30(29.7)	150(149.7)	2	0.96	2
11040E04	●	40	32	30(29.7)	150(149.7)	4	0.94	2
11040E06	●	40	32	30(29.7)	150(149.7)	6	0.93	2
11050E05	●	50	32	30(29.7)	150(149.7)	5	1.04	2
11050E07	●	50	32	30(29.7)	150(149.7)	7	1.04	2
11063E08	●	63	32	30(29.7)	150(149.7)	8	1.24	2
11080E10	●	80	32	30(29.7)	150(149.7)	10	1.52	2

The LH and LF dimensions in parentheses are dimensions using RE = 3.0/3.2 insert. When using RE = 3.0/3.2 inserts, the maximum depth of cut is 9.5mm. Inserts are sold separately.

Shoulder Milling

High-Speed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Parts

Applicable Cutter	Flat Insert Screw		Integrated Wrench	Anti-seizure Cream
WEZ11014E01 WEZ11016E02(-12) WEZ11018E02 WEZ11020E02(-16) WEZ11020E03(-16) WEZ11022E03 WEZ11025E02 WEZ11025E03(-20) WEZ11025E04(-20) WEZ11028E04 WEZ11030E04 WEZ11032E02 WEZ11032E03 WEZ11032E04 WEZ11032E05(-25) WEZ11035E05 WEZ11040E02 WEZ11040E04 WEZ11040E06 WEZ11050E05 WEZ11050E07 WEZ11063E08 WEZ11080E10	BFTX03051P	1.5	TRDR081P	SUMI-P

Non-Ferrous Metals

Cast Iron, High-Speed

Identification Code

WEZ 11 025 E 03 -20
 Series Code Insert Size Dia. Shank type Number of Teeth Shank Dia.

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.


Modify the C chamfering portion.

WEZ11 type
 Reworking guidelines
 Corner radius = 2.4: C1 (AOMT11T324PEER)
 Corner radius = 3.0: C2.5 (AOMT11T330PEER)
 Corner radius = 3.2: C2.5 (AOMT11T332PEER)
 Standard: R1.

Insert

Dimensions (mm)

Process	Grade Classification		Coated Carbide							Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig	
	High-speed/Light Cutting	General-purpose													
	Roughing														
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A			
AOMT 11T302PEER-G	●	●											●	0.2	1
11T304PEER-G	●	●											●	0.4	1
11T305PEER-G	●	●												0.5	1
11T308PEER-G	●	●											●	0.8	1
11T310PEER-G	●	●												1.0	1
11T312PEER-G	●	●												1.2	1
11T316PEER-G	●	●												1.6	1
11T320PEER-G	●	●												2.0	1
11T324PEER-G	●	●												2.4	1
11T330PEER-G	●	●												3.0	2
11T332PEER-G	●	●												3.2	2
AOMT 11T304PEER-H	●	●												0.4	1
11T308PEER-H	●	●												0.8	1
11T312PEER-H	●	●												1.2	1
11T316PEER-H	●	●												1.6	1
AOET 11T302PEER-F	●													0.2	1
11T304PEER-F	●													0.4	1
11T305PEER-F	●													0.5	1
11T308PEER-F	●													0.8	1
11T310PEER-F	●													1.0	1
11T312PEER-F	●													1.2	1
11T316PEER-F	●													1.6	1
11T320PEER-F	●													2.0	1
11T324PEER-F	●													2.4	1
11T330PEER-F	●													3.0	2
11T332PEER-F	●													3.2	2
AOET 11T302PEER-P16	●													0.2	1
11T304PEER-P16	●													0.4	1
11T305PEER-P16	●													0.5	1
11T308PEER-P16	●													0.8	1
11T310PEER-P16	●													1.0	1
11T312PEER-P16	●													1.2	1
AOET 11T302PEER-P20	●													0.2	1
11T304PEER-P20	●													0.4	1
11T305PEER-P20	●													0.5	1
11T308PEER-P20	●													0.8	1
11T310PEER-P20	●													1.0	1
11T312PEER-P20	●													1.2	1
AOET 11T302PEER-P25	●													0.2	1
11T304PEER-P25	●													0.4	1
11T305PEER-P25	●													0.5	1
11T308PEER-P25	●													0.8	1
11T310PEER-P25	●													1.0	1
11T312PEER-P25	●													1.2	1
AOET 11T302PEFR-S										●	●			0.2	1
11T304PEFR-S										●	●			0.4	1
11T305PEFR-S										●	●			0.5	1
11T308PEFR-S										●	●			0.8	1
11T310PEFR-S										●	●			1.0	1
11T312PEFR-S										●	●			1.2	1
11T316PEFR-S										●	●			1.6	1
11T320PEFR-S										●	●			2.0	1
11T324PEFR-S										●	●			2.4	1
11T330PEFR-S										●	●			3.0	2
11T332PEFR-S										●	●			3.2	2

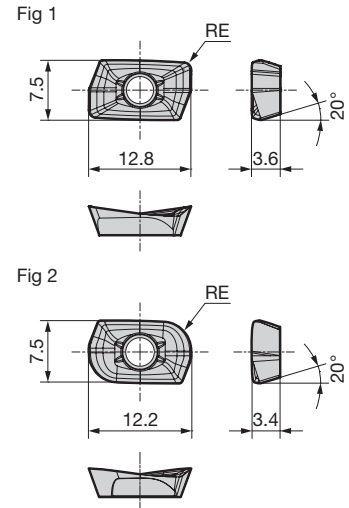

-G: General-purpose, -H: Strong Edge, -F: Medium Finishing,
 -P16/-P20/-P25: High-precision Machining, -S: Non-Ferrous Metals.
 * -P16 is applicable to cutter diameters $\phi 14$ and $\phi 16$. -P20 is applicable to cutter diameters $\phi 18$ and $\phi 20$.
 -P25 is applicable to cutter diameters $\phi 25$ and $\phi 28$.

Recommended Cutting Conditions H58 Maximum Allowable Spindle Speed H59

Precautions for Mounting Inserts H55



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

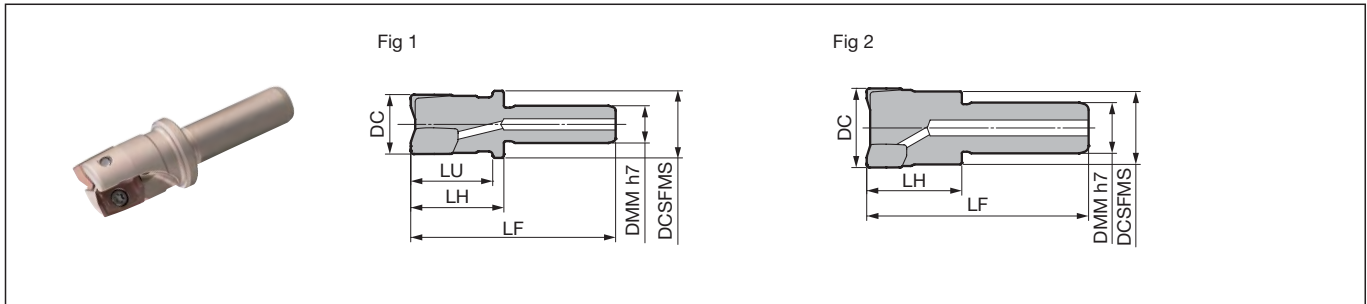

Body (Short Shank type)

Cat. No.	Stock	Dimensions (mm)								
		Dia. DC	Boss DCSFMS	Shank DMM	Head LH	Effective Length LU	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEZ 11014ES01-12	●	14	18	12	30(29.7)	27	65(64.7)	1	0.05	1
11016ES02-10	●	16	18	10	25(24.7)	22	55(54.7)	2	0.04	1
11016ES02-12	●	16	18	12	30(29.7)	27	65(64.7)	2	0.05	1
11020ES03-10	●	20	18	10	25(24.7)	—	55(54.7)	3	0.04	2
11020ES03-12	●	20	18	12	30(29.7)	—	65(64.7)	3	0.06	2
11020ES03-16	●	20	23	16	30(29.7)	27	70(69.7)	3	0.10	1
11025ES04-12	●	25	23	12	30(29.7)	—	65(64.7)	4	0.09	2
11025ES04-16	●	25	23	16	30(29.7)	—	70(69.7)	4	0.12	2

The LH and LF dimensions in parentheses are dimensions using RE = 3.0/3.2 insert. When using RE = 3.0/3.2 inserts, the maximum depth of cut is 9.5mm. Inserts are sold separately.

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
	WEZ11014ES01-12 WEZ11016ES02-10 WEZ11016ES02-12 WEZ11020ES03-10 WEZ11020ES03-12 WEZ11020ES03-16 WEZ11025ES04-12 WEZ11025ES04-16	BFTX03051P BFTX03061P	1.5 TRDR081P

Identification Code

WEZ 11 020 E S 03 -12

Series Code Insert Size Dia. Shank type Short Shank Number of Teeth Shank Dia.


* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.

Modify the C chamfering portion.

WEZ11 type
 Reworking guidelines
 Corner radius = 2.4: C1 (AOMT11T324PEER)
 Corner radius = 3.0: C2.5 (AOMT11T330PEER)
 Corner radius = 3.2: C2.5 (AOMT11T332PEER)
 Standard: R1.

Recommended Cutting Conditions

Tool: WEZ11016ES02-10
 Insert: AOET11T300PEER-F

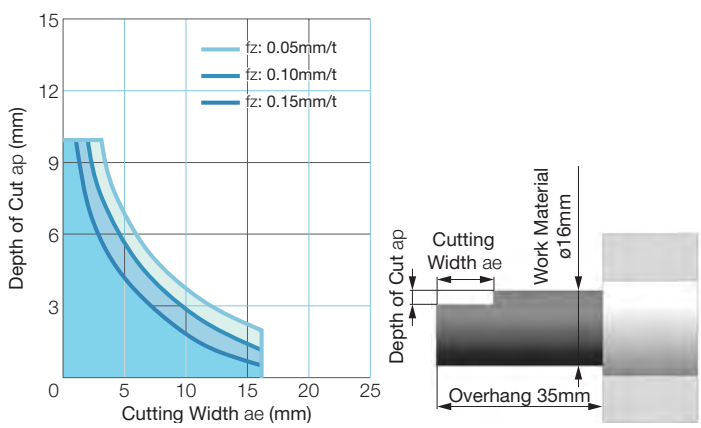


- For cutting conditions for each work material, see H58.
- The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, work material shape, clamping system).

Insert

Dimensions (mm)

Process	Grade Classification		Coated Carbide							Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig
	High-speed/Light Cutting	General-purpose												
	Roughing													
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A		
AOMT 11T302PEER-G	●	●								—	—	●	0.2	1
11T304PEER-G	●	●								—	—	●	0.4	1
11T305PEER-G	●	●								—	—	—	0.5	1
11T308PEER-G	●	●								—	—	●	0.8	1
11T310PEER-G	●	●								—	—	—	1.0	1
11T312PEER-G	●	●								—	—	—	1.2	1
11T316PEER-G	●	●								—	—	—	1.6	1
11T320PEER-G	●	●								—	—	—	2.0	1
11T324PEER-G	●	●								—	—	—	2.4	1
11T330PEER-G	●	●								—	—	—	3.0	2
11T332PEER-G	●	●								—	—	—	3.2	2
AOMT 11T304PEER-H	●	●								—	—	—	0.4	1
11T308PEER-H	●	●								—	—	—	0.8	1
11T312PEER-H	●	●								—	—	—	1.2	1
11T316PEER-H	●	●								—	—	—	1.6	1
AOET 11T302PEER-F	●									—	—	—	0.2	1
11T304PEER-F	●									—	—	—	0.4	1
11T305PEER-F	●									—	—	—	0.5	1
11T308PEER-F	●									—	—	—	0.8	1
11T310PEER-F	●									—	—	—	1.0	1
11T312PEER-F	●									—	—	—	1.2	1
11T316PEER-F	●									—	—	—	1.6	1
11T320PEER-F	●									—	—	—	2.0	1
11T324PEER-F	●									—	—	—	2.4	1
11T330PEER-F	●									—	—	—	3.0	2
11T332PEER-F	●									—	—	—	3.2	2
AOET 11T302PEER-P16	●									—	—	—	0.2	1
11T304PEER-P16	●									—	—	—	0.4	1
11T305PEER-P16	●									—	—	—	0.5	1
11T308PEER-P16	●									—	—	—	0.8	1
11T310PEER-P16	●									—	—	—	1.0	1
11T312PEER-P16	●									—	—	—	1.2	1
AOET 11T302PEER-P20	●									—	—	—	0.2	1
11T304PEER-P20	●									—	—	—	0.4	1
11T305PEER-P20	●									—	—	—	0.5	1
11T308PEER-P20	●									—	—	—	0.8	1
11T310PEER-P20	●									—	—	—	1.0	1
11T312PEER-P20	●									—	—	—	1.2	1
AOET 11T302PEER-P25	●									—	—	—	0.2	1
11T304PEER-P25	●									—	—	—	0.4	1
11T305PEER-P25	●									—	—	—	0.5	1
11T308PEER-P25	●									—	—	—	0.8	1
11T310PEER-P25	●									—	—	—	1.0	1
11T312PEER-P25	●									—	—	—	1.2	1
AOET 11T302PEFR-S	—	—								●	●	—	0.2	1
11T304PEFR-S	—	—								●	●	—	0.4	1
11T305PEFR-S	—	—								●	●	—	0.5	1
11T308PEFR-S	—	—								●	●	—	0.8	1
11T310PEFR-S	—	—								●	●	—	1.0	1
11T312PEFR-S	—	—								●	●	—	1.2	1
11T316PEFR-S	—	—								●	●	—	1.6	1
11T320PEFR-S	—	—								●	●	—	2.0	1
11T324PEFR-S	—	—								●	●	—	2.4	1
11T330PEFR-S	—	—								●	●	—	3.0	2
11T332PEFR-S	—	—								●	●	—	3.2	2

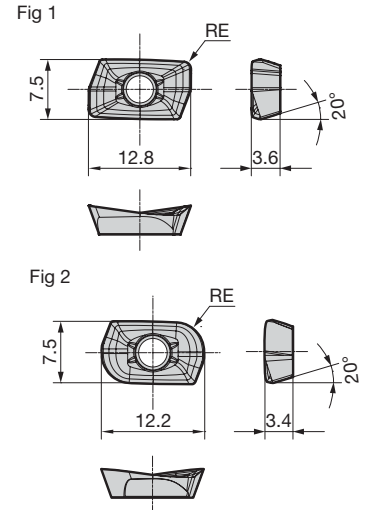

-G: General-purpose, -H: Strong Edge, -F: Medium Finishing,
 -P16/-P20/-P25: High-precision Machining, -S: Non-Ferrous Metals.
 * -P16 is applicable to cutter diameters $\phi 14$ and $\phi 16$. -P20 is applicable to cutter diameters $\phi 18$ and $\phi 20$.
 -P25 is applicable to cutter diameters $\phi 25$ and $\phi 28$.


Recommended Cutting Conditions H58 Maximum Allowable Spindle Speed H59

Precautions for Mounting Inserts H55

WEZ 11000EL type



Milling Cutters

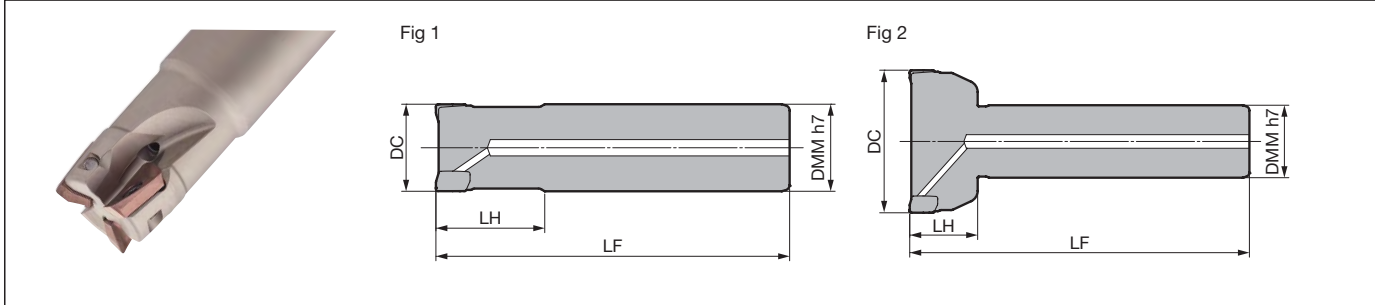

Face Milling

Body (Long Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEZ 11014EL01	●	14	16	25(24.7)	120(119.7)	1	0.16	1
11016EL02	●	16	16	25(24.7)	145(144.7)	2	0.19	1
11016EL02-14	●	16	14	25(24.7)	145(144.7)	2	0.15	2
11018EL02	●	18	16	25(24.7)	145(144.7)	2	0.20	2
11020EL02	●	20	20	40(39.7)	150(149.7)	2	0.31	1
11020EL02-18	●	20	18	25(24.7)	150(149.7)	2	0.26	2
11022EL02	●	22	20	30(29.7)	150(149.7)	2	0.32	2
11025EL02	●	25	25	50(49.7)	170(169.7)	2	0.57	1
11025EL02-22	●	25	22	30(29.7)	170(169.7)	2	0.46	2
11025EL03	●	25	25	50(49.7)	170(169.7)	3	0.57	1
11028EL02	●	28	25	30(29.7)	170(169.7)	2	0.60	2
11030EL02	●	30	25	30(29.7)	170(169.7)	2	0.62	2
11032EL02	●	32	32	60(59.7)	170(169.7)	2	0.97	1
11032EL02-30	●	32	30	30(29.7)	170(169.7)	2	0.88	2
11032EL03	●	32	32	60(59.7)	170(169.7)	3	0.96	1
11035EL02	●	35	32	30(29.7)	170(169.7)	2	1.02	2
11035EL03	●	35	32	30(29.7)	170(169.7)	3	1.00	2
11040EL02	●	40	32	30(29.7)	170(169.7)	2	1.08	2
11050EL03	●	50	32	30(29.7)	170(169.7)	3	1.19	2

The LH and LF dimensions in parentheses are dimensions using RE = 3.0/3.2 insert. When using RE = 3.0/3.2 inserts, the maximum depth of cut is 9.5mm. Inserts are sold separately.

Shoulder Milling

High-Feed

Multi-purpose

Radius

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
WEZ11014EL01 WEZ11016EL02(-14) WEZ11018EL02 WEZ11020EL02(-18) WEZ11022EL02 WEZ11025EL02(-22) WEZ11025EL03 WEZ11028EL02 WEZ11030EL02 WEZ11032EL02(-30) WEZ11032EL03 WEZ11035EL02 WEZ11035EL03 WEZ11040EL02 WEZ11050EL03	BFTX0305IP	1.5 TRDR08IP	SUMI-P
	BFTX0306IP		

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Identification Code

WEZ 11 025 E L 02 -22

Series Code Insert Size Dia. Shank type Long Shank Number of Teeth Shank Dia.

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.

Modify the C chamfering portion.

WEZ11 type

Reworking guidelines


- Corner radius = 2.4: C1 (AOMT11T324PEER)
- Corner radius = 3.0: C2.5 (AOMT11T330PEER)
- Corner radius = 3.2: C2.5 (AOMT11T332PEER)

Standard: R1.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet			
	High-speed/Light Cutting									N	P	Corner Radius	Fig	
	General-purpose								N	N				
Process	Roughing													
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A	RE	Fig
AOMT 11T302PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.2	1
11T304PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.4	1
11T305PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	0.5	1
11T308PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
11T310PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	1.0	1
11T312PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
11T316PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
11T320PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	2.0	1
11T324PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	2.4	1
11T330PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	3.0	2
11T332PEER-G	●	●	●	●	●	●	●	●	●	—	—	—	3.2	2
AOMT 11T304PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
11T308PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
11T312PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
11T316PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
AOET 11T302PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
11T304PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
11T305PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
11T308PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
11T310PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
11T312PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
11T316PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.6	1
11T320PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.0	1
11T324PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.4	1
11T330PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.0	2
11T332PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.2	2
AOET 11T302PEER-P16	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
11T304PEER-P16	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
11T305PEER-P16	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
11T308PEER-P16	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
11T310PEER-P16	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
11T312PEER-P16	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET 11T302PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
11T304PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
11T305PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
11T308PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
11T310PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
11T312PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET 11T302PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
11T304PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
11T305PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
11T308PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
11T310PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
11T312PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET 11T302PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.2	1
11T304PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.4	1
11T305PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.5	1
11T308PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
11T310PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.0	1
11T312PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.2	1
11T316PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.6	1
11T320PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	2.0	1
11T324PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	2.4	1
11T330PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	3.0	2
11T332PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	3.2	2

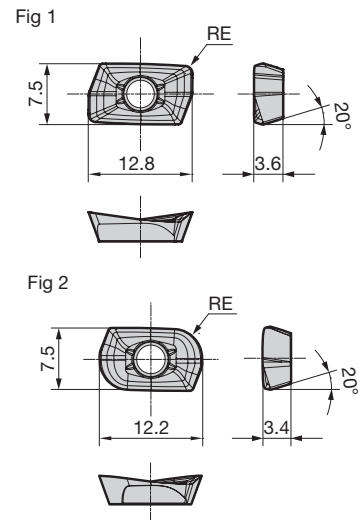

-G: General-purpose, -H: Strong Edge, -F: Medium Finishing,
 -P16/-P20/-P25: High-precision Machining, -S: Non-Ferrous Metals.
 * -P16 is applicable to cutter diameters $\phi 14$ and $\phi 16$. -P20 is applicable to cutter diameters $\phi 18$ and $\phi 20$.
 -P25 is applicable to cutter diameters $\phi 25$ and $\phi 28$.

Recommended Cutting Conditions **H58** Maximum Allowable Spindle Speed **H59**



Precautions for Mounting Inserts **H55**

WEZ 17000E type



Rake Angle	Radial	-6° to -12°
	Axial	6° to 15°

15mm 90°

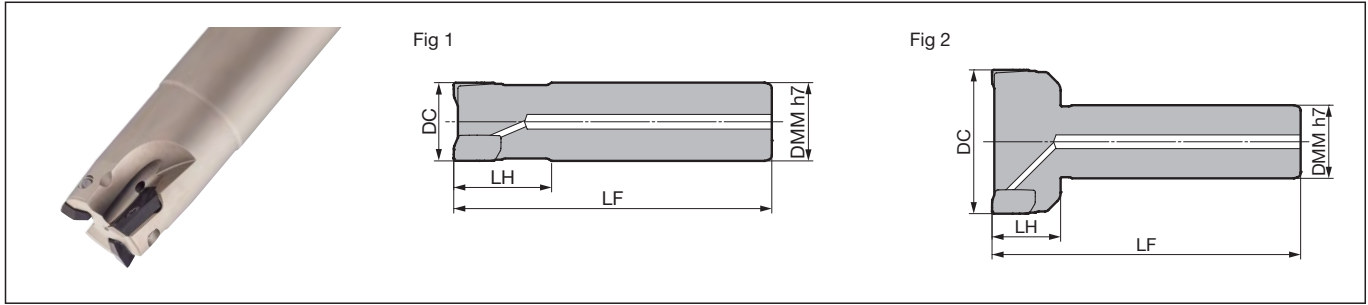

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEZ 17025E02	●	25	25	35(34.3)	120(119.3)	2	0.38	1
17025E02-20	●	25	20	35(34.3)	120(119.3)	2	0.25	2
17028E02	●	28	25	35(34.3)	120(119.3)	2	0.40	2
17030E03	●	30	25	40(39.3)	130(129.3)	3	0.43	2
17032E02	●	32	32	40(39.3)	130(129.3)	2	0.71	1
17032E03	●	32	32	40(39.3)	130(129.3)	3	0.69	1
17032E03-25	●	32	25	40(39.3)	130(129.3)	3	0.44	2
17035E03	●	35	32	40(39.3)	130(129.3)	3	0.72	2
17040E03	●	40	32	30(29.3)	135(134.3)	3	0.81	2
17040E04	●	40	32	30(29.3)	135(134.3)	4	0.79	2
17050E03	●	50	32	30(29.3)	135(134.3)	3	0.93	2
17050E03-42	●	50	42	30(29.3)	135(134.3)	3	1.41	2
17050E05	●	50	32	30(29.3)	135(134.3)	5	0.89	2
17050E05-42	●	50	42	30(29.3)	135(134.3)	5	1.37	2
17063E04	●	63	32	30(29.3)	135(134.3)	4	1.10	2
17063E04-42	●	63	42	30(29.3)	135(134.3)	4	1.58	2
17063E06	●	63	32	30(29.3)	135(134.3)	6	1.08	2
17063E06-42	●	63	42	30(29.3)	135(134.3)	6	1.56	2
17080E07	●	80	32	30(29.3)	135(134.3)	7	1.39	2

The LH and LF dimensions in parentheses are dimensions using RE = 5.0/6.4 insert. When using RE = 5.0/6.4 inserts, the maximum depth of cut is 14.5mm. Inserts are sold separately.

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
WEZ17025E02(-20) WEZ17028E02 WEZ17030E03 WEZ17032E02 WEZ17032E03(-25) WEZ17035E03 WEZ17040E03 WEZ17040E04 WEZ17050E03(-42) WEZ17050E05(-42) WEZ17063E04(-42) WEZ17063E06(-42) WEZ17080E07	BFTX04071P BFTX04091P	 3.0 TRDR151P	 SUMI-P

Identification Code

WEZ 17 025 E 02 -20
 Series Code Insert Size Dia. Shank type Number of Teeth Shank Dia.

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.

Modify the C chamfering portion.

WEZ17 type

Reworking guidelines
 Corner radius = 2.4: C1 (AOMT170524PEER)
 Corner radius = 3.0: C1.5 (AOMT170530PEER)
 Corner radius = 3.2: C1.5 (AOMT170532PEER)
 Corner radius = 4.0: C2 (AOMT170540PEER)
 Corner radius = 5.0: C5 (AOMT170550PEER)
 Corner radius = 6.4: C5 (AOMT170564PEER)

Standard: R1.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed

Insert

Dimensions (mm)

Grade Classification	Coated Carbide							Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig		
	High-speed/Light Cutting	P	M	K	N	S	H	N	P					
	General-purpose													
Process	Roughing													
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A		
AOMT 170502PEER-L	●												0.2	1
170504PEER-L	●	●										●	0.4	1
170508PEER-L	●	●										●	0.8	1
170512PEER-L	●												1.2	1
170516PEER-L	●												1.6	1
AOMT 170502PEER-G	●	●										●	0.2	1
170504PEER-G	●	●	●									●	0.4	1
170505PEER-G	●												0.5	1
170508PEER-G	●	●										●	0.8	1
170510PEER-G	●												1.0	1
170512PEER-G	●	●											1.2	1
170516PEER-G	●	●											1.6	1
170520PEER-G	●	●											2.0	1
170524PEER-G	●												2.4	1
170530PEER-G	●	●											3.0	1
170532PEER-G	●	●											3.2	1
170540PEER-G	●	●											4.0	1
170550PEER-G	●	●											5.0	2
170564PEER-G	●												6.4	2
AOMT 170504PEER-H	●	●	●										0.4	1
170508PEER-H	●	●	●										0.8	1
170512PEER-H	●												1.2	1
170516PEER-H	●												1.6	1
AOET 170502PEER-F	●												0.2	1
170504PEER-F	●												0.4	1
170505PEER-F	●												0.5	1
170508PEER-F	●												0.8	1
170510PEER-F	●												1.0	1
170512PEER-F	●												1.2	1
170516PEER-F	●												1.6	1
170520PEER-F	●												2.0	1
170524PEER-F	●												2.4	1
170530PEER-F	●												3.0	1
170532PEER-F	●												3.2	1
170540PEER-F	●												4.0	1
170550PEER-F	●												5.0	2
170564PEER-F	●												6.4	2
AOET 170502PEER-P25	●												0.2	1
170504PEER-P25	●												0.4	1
170505PEER-P25	●												0.5	1
170508PEER-P25	●												0.8	1
170510PEER-P25	●												1.0	1
170512PEER-P25	●												1.2	1
AOET 170502PEER-P32	●												0.2	1
170504PEER-P32	●												0.4	1
170505PEER-P32	●												0.5	1
170508PEER-P32	●												0.8	1
170510PEER-P32	●												1.0	1
170512PEER-P32	●												1.2	1
AOET 170502PEFR-S								●	●				0.2	1
170504PEFR-S								●	●				0.4	1
170505PEFR-S								●	●				0.5	1
170508PEFR-S								●	●				0.8	1
170510PEFR-S								●	●				1.0	1
170512PEFR-S								●	●				1.2	1
170516PEFR-S								●	●				1.6	1
170520PEFR-S								●	●				2.0	1
170524PEFR-S								●	●				2.4	1
170530PEFR-S								●	●				3.0	1
170532PEFR-S								●	●				3.2	1
170540PEFR-S								●	●				4.0	1
170550PEFR-S								●	●				5.0	2
170564PEFR-S								●	●				6.4	2

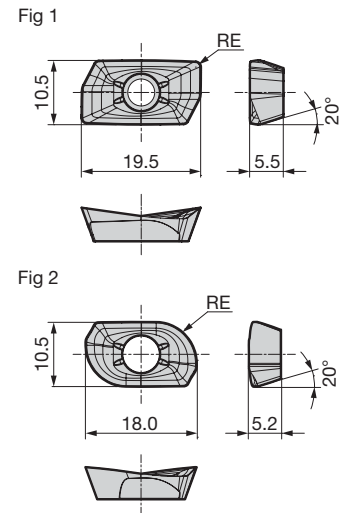

-L: Low Cutting Force, -G: General-purpose, -H: Strong Edge, -F: Medium Finishing, -P25/-P32: High-precision Machining, -S: Non-Ferrous Metals.

* -P25 is applicable to cutter diameters ø25 and ø28. -P32 is applicable to cutter diameters ø30, ø32 and ø35.

Recommended Cutting Conditions H58 Maximum Allowable Spindle Speed H59

Precautions for Mounting Inserts H55

● mark: Standard stocked item (new product/expanded item)

Milling Cutters
Face Milling
Shoulder Milling
High-Feed
Multi-purpose
Radius
Radial/3D Profiling
Side Cutters T-Slot Cutters
Chamfering
Non-Ferrous Metals
Cast Iron, High-Speed



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

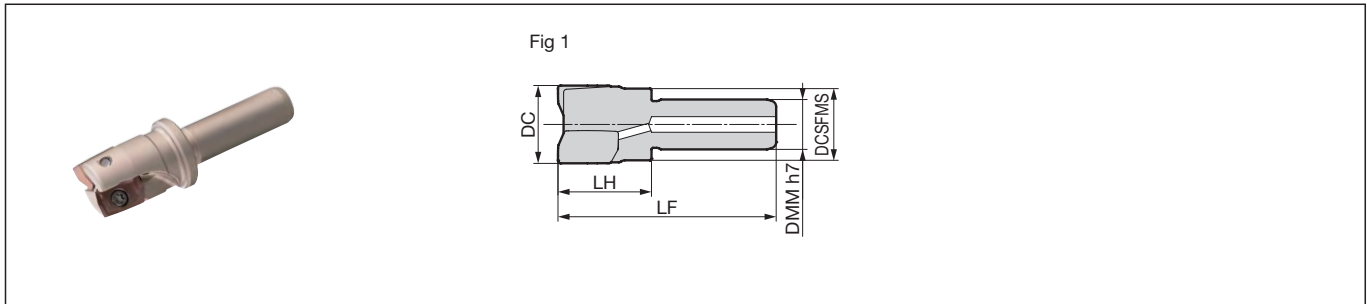

Body (Short Shank type)

Cat. No.	Stock	Dimensions (mm)							
		Dia. DC	Boss DCSFMS	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEZ 17025ES02-16	●	25	23	16	30(29.3)	70(69.3)	2	0.11	1
17032ES03-16	●	32	27	16	30(29.3)	70(69.3)	3	0.14	1

The LH and LF dimensions in parentheses are dimensions using RE = 5.0/6.4 insert. When using RE = 5.0/6.4 inserts, the maximum depth of cut is 14.5mm. Inserts are sold separately.

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
	WEZ17025ES02-16 WEZ17032ES03-16	BFTX0407IP BFTX0409IP	3.0 TRDR15IP


Identification Code

WEZ 17 025 E S 02 -16


Series Code Insert Size Dia. Shank type Short Shank Number of Teeth Shank Dia.

Recommended Cutting Conditions

Tool: WEZ17025ES02-16
Insert: AOET170500PEER-F

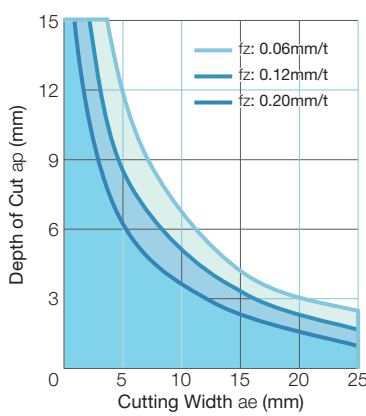

- For cutting conditions for each work material, see H58.
- The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, work material shape, clamping system).

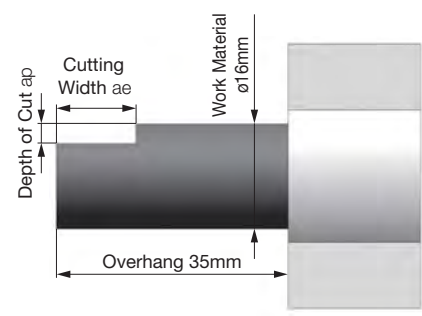

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.

Modify the C chamfering portion.

WEZ17 type

Reworking guidelines

- Corner radius = 2.4: C1 (AOMT170524PEER)
- Corner radius = 3.0: C1.5 (AOMT170530PEER)
- Corner radius = 3.2: C1.5 (AOMT170532PEER)
- Corner radius = 4.0: C2 (AOMT170540PEER)
- Corner radius = 5.0: C5 (AOMT170550PEER)
- Corner radius = 6.4: C5 (AOMT170564PEER)

Standard: R1.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide							Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig		
	High-speed/Light Cutting	P	M	K	N	S	H	N	P					
	General-purpose							N	P					
Process	Roughing													
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A		
AOMT 170502PEER-L	●	●	—	—	—	—	—	—	—	—	—	●	0.2	1
170504PEER-L	●	●	—	—	—	—	—	—	—	—	—	●	0.4	1
170508PEER-L	●	●	—	—	—	—	—	—	—	—	—	●	0.8	1
170512PEER-L	●	●	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-L	●	●	—	—	—	—	—	—	—	—	—	—	1.6	1
AOMT 170502PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.2	1
170504PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.4	1
170505PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-G	●	●	—	—	—	—	—	—	—	—	—	●	0.8	1
170510PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	1.6	1
170520PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	2.0	1
170524PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	2.4	1
170530PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	3.0	1
170532PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	3.2	1
170540PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	4.0	1
170550PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	5.0	2
170564PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	6.4	2
AOMT 170504PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
170508PEER-H	●	●	—	—	—	—	—	—	—	—	—	—	0.8	1
170512PEER-H	●	●	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-H	●	●	—	—	—	—	—	—	—	—	—	—	1.6	1
AOET 170502PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
170505PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
170510PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.6	1
170520PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.0	1
170524PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.4	1
170530PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.0	1
170532PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.2	1
170540PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	4.0	1
170550PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	5.0	2
170564PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	6.4	2
AOET 170502PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
170505PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
170510PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET 170502PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
170505PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
170510PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET 170502PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	0.2	1
170504PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	0.4	1
170505PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	0.5	1
170508PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	0.8	1
170510PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	1.0	1
170512PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	1.2	1
170516PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	1.6	1
170520PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	2.0	1
170524PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	2.4	1
170530PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	3.0	1
170532PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	3.2	1
170540PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	4.0	1
170550PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	5.0	2
170564PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	6.4	2

-L: Low Cutting Force, -G: General-purpose, -H: Strong Edge, -F: Medium Finishing, -P25/-P32: High-precision Machining, -S: Non-Ferrous Metals.

* -P25 is applicable to cutter diameters ø25 and ø28. -P32 is applicable to cutter diameters ø30, ø32 and ø35.

Recommended Cutting Conditions H58

● mark: Standard stocked item (new product/expanded item)

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

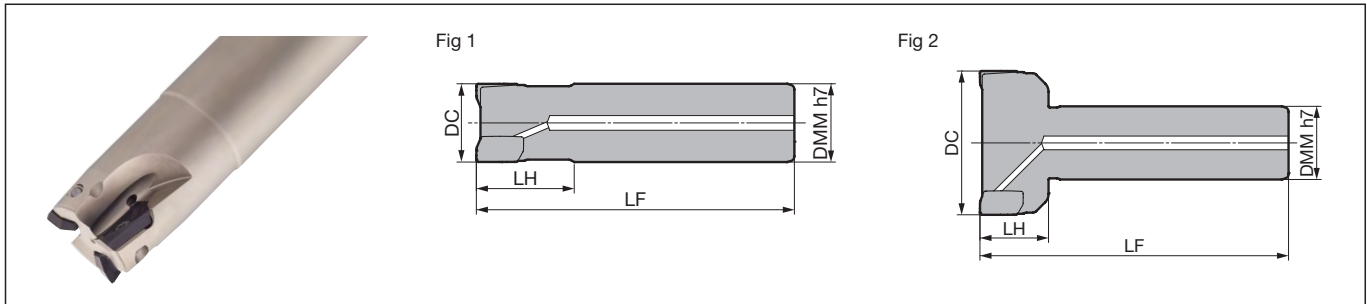

Body (Long Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEZ 17025EL02	●	25	25	50(49.3)	170(169.3)	2	0.55	1
17028EL02	●	28	25	50(49.3)	170(169.3)	2	0.57	2
17030EL02	●	30	25	50(49.3)	170(169.3)	2	0.59	2
17032EL02	●	32	32	60(59.3)	170(169.3)	2	0.94	1
17032EL02-30	●	32	30	50(49.3)	170(169.3)	2	0.85	2
17032EL03	●	32	32	60(59.3)	170(169.3)	3	0.92	1
17035EL02	●	35	32	50(49.3)	170(169.3)	2	0.98	2
17040EL02	●	40	32	50(49.3)	170(169.3)	2	1.09	2
17040EL03	●	40	32	50(49.3)	170(169.3)	3	1.08	2
17040EL04	●	40	32	50(49.3)	170(169.3)	4	1.05	2
17050EL03	●	50	32	50(49.3)	170(169.3)	3	1.29	2
17050EL03-42	●	50	42	50(49.3)	170(169.3)	3	1.83	2
17050EL05	●	50	32	50(49.3)	170(169.3)	5	1.25	2
17050EL05-42	●	50	42	50(49.3)	170(169.3)	5	1.79	2
17063EL04	●	63	32	50(49.3)	170(169.3)	4	1.61	2
17063EL04-42	●	63	42	50(49.3)	170(169.3)	4	2.16	2
17063EL06	●	63	32	50(49.3)	170(169.3)	6	1.58	2
17063EL06-42	●	63	42	50(49.3)	170(169.3)	6	2.13	2

The LH and LF dimensions in parentheses are dimensions using RE = 5.0/6.4 insert. When using RE = 5.0/6.4 inserts, the maximum depth of cut is 14.5mm. Inserts are sold separately.

Parts

Applicable Cutter	Flat Insert Screw		Wrench	Anti-seizure Cream
WEZ17025EL02 WEZ17028EL02 WEZ17030EL02 WEZ17032EL02(-30) WEZ17032EL03 WEZ17035EL02	BFTX0407IP			
WEZ17040EL02 WEZ17040EL03 WEZ17040EL04 WEZ17050EL03(-42) WEZ17050EL05(-42) WEZ17063EL04(-42) WEZ17063EL06(-42)	BFTX0409IP	3.0	TRDR15IP	SUMI-P

Identification Code

WEZ 17 032 E L 02 -30
 Series Code Insert Size Dia. Shank type Long Shank Number of Teeth Shank Dia.

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.

Modify the C chamfering portion.

WEZ17 type

Reworking guidelines


- Corner radius = 2.4: C1 (AOMT170524PEER)
- Corner radius = 3.0: C1.5 (AOMT170530PEER)
- Corner radius = 3.2: C1.5 (AOMT170532PEER)
- Corner radius = 4.0: C2 (AOMT170540PEER)
- Corner radius = 5.0: C5 (AOMT170550PEER)
- Corner radius = 6.4: C5 (AOMT170564PEER)

Standard: R1.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide							Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig		
	High-speed/Light Cutting							N	P					
	General-purpose							N	P					
Process	Roughing							N	P					
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A		
AOMT 170502PEER-L	●	●	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-L	●	●	—	—	—	—	—	—	—	—	—	●	0.4	1
170508PEER-L	●	●	—	—	—	—	—	—	—	—	—	●	0.8	1
170512PEER-L	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-L	●	—	—	—	—	—	—	—	—	—	—	—	1.6	1
AOMT 170502PEER-G	●	●	●	●	●	●	●	—	—	—	—	●	0.2	1
170504PEER-G	●	●	●	●	●	●	●	—	—	—	—	●	0.4	1
170505PEER-G	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-G	●	●	●	●	●	●	●	—	—	—	—	●	0.8	1
170510PEER-G	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	1.6	1
170520PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	2.0	1
170524PEER-G	●	—	—	—	—	—	—	—	—	—	—	—	2.4	1
170530PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	3.0	1
170532PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	3.2	1
170540PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	4.0	1
170550PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	5.0	2
170564PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	6.4	2
AOMT 170504PEER-H	●	●	●	●	●	●	●	—	—	—	—	—	0.4	1
170508PEER-H	●	●	—	—	—	—	—	—	—	—	—	—	0.8	1
170512PEER-H	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-H	●	—	—	—	—	—	—	—	—	—	—	—	1.6	1
AOET 170502PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
170505PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
170510PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.6	1
170520PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.0	1
170524PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.4	1
170530PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.0	1
170532PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.2	1
170540PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	4.0	1
170550PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	5.0	2
170564PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	6.4	2
AOET 170502PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
170505PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
170510PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET 170502PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
170505PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
170510PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-P32	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET 170502PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	0.2	1
170504PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	0.4	1
170505PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	0.5	1
170508PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	0.8	1
170510PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	1.0	1
170512PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	1.2	1
170516PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	1.6	1
170520PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	2.0	1
170524PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	2.4	1
170530PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	3.0	1
170532PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	3.2	1
170540PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	4.0	1
170550PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	5.0	2
170564PEFR-S	—	—	—	—	—	—	—	●	●	—	—	—	6.4	2

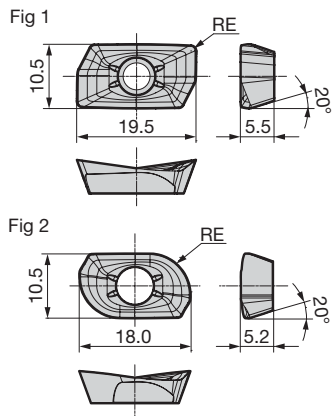

-L: Low Cutting Force, -G: General-purpose, -H: Strong Edge, -F: Medium Finishing, -P25/-P32: High-precision Machining, -S: Non-Ferrous Metals.

* -P25 is applicable to cutter diameters ø25 and ø28. -P32 is applicable to cutter diameters ø30, ø32 and ø35.

Recommended Cutting Conditions H58

● mark: Standard stocked item (new product/expanded item)

Milling Cutters
 Face Milling
 Shoulder Milling
 High-Feed
 Multi-purpose
 Radius
 Radial/3D Profiling
 Side Cutters
 T-Slot Cutters
 Chamfering
 Non-Ferrous Metals
 Cast Iron, High-Speed

New

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



■ Features

- **High-efficiency shoulder milling of deep steps**
Inserts for SEC-WaveMill WEZ series are arranged in multiple stages forming a long cutting edge, to enable high-efficiency shoulder milling of deep steps
- **Superb chatter resistance**
Sharp inserts and irregular pitched body help suppress chatter and vibration
- **Support for all types of work materials**
A lineup of grades specific to each work material, as well as the general-purpose ACU2500 grade, which is applicable to steel, stainless steel and cast iron


■ Body Features

- **Flute shape ensures both rigidity and excellent chip evacuation performance**

The chip pocket is larger toward the tip and the body is thicker toward the rear, for excellent chip evacuation and rigidity



- **Irregular pitched body suppresses chattering**

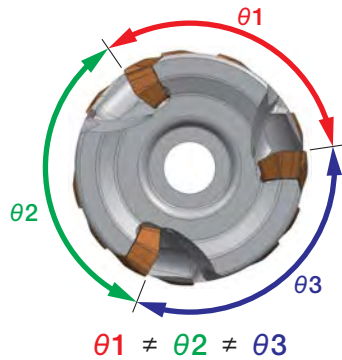


Irregular pitch is used to improve chatter resistance

■ Cutting Performance



- **Sharp inserts and irregular pitched body provide superb chatter resistance**

Capable of stable machining even with BT40 spindle machines
Vertical Machining Centre BT40

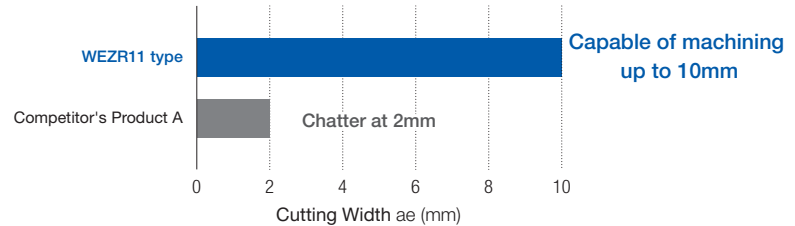

Machine : Vertical Machining Centre BT40, Work Material: S50C, Overhang Amount: 60mm
 Tool : WEZR 11032E3632Z03 (ø32, 3-tooth 4-stage)
 Insert : AOMT 11T308PEER-G (ACU2500)
 Cutting Conditions : vc = 150m/min, fz = 0.1mm/t, ap = 30mm, Dry


Capable of stable machining even with a long overhang
Vertical Machining Centre BT50

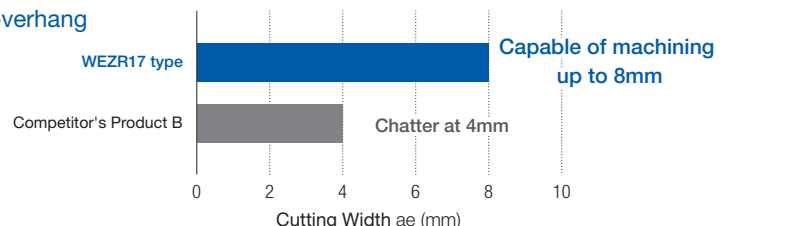

Machine : Vertical Machining Centre BT50, Work Material: SCM440, Overhang Amount: 235mm
 Tool : WEZR 17063RS572Z04 (ø63, 4-tooth 4-stage)
 Insert : AOMT 170508PEER-G (ACU2500)
 Cutting Conditions : vc = 150m/min, fz = 0.15mm/t, ap = 50mm, Dry


■ Cutting Performance

- Optimised cutting edge shape and high-precision molding technology result in excellent wall accuracy

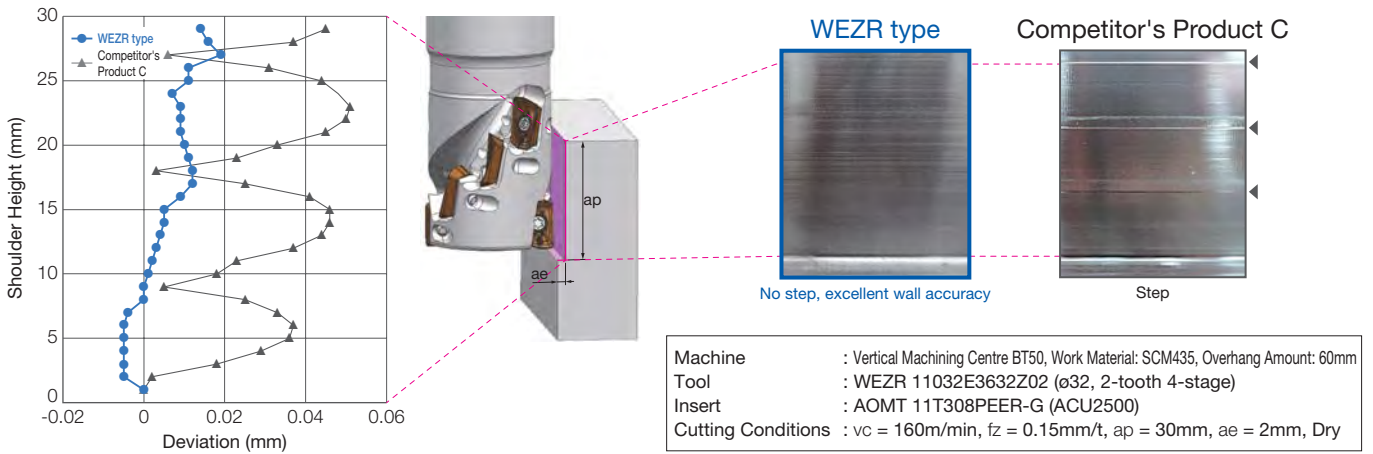


■ Application Range

- Steel, stainless steel, cast iron

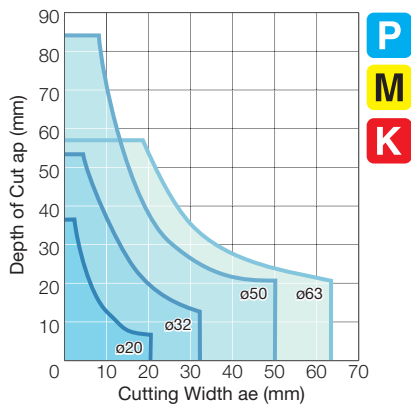

- Aluminum alloys, titanium alloys

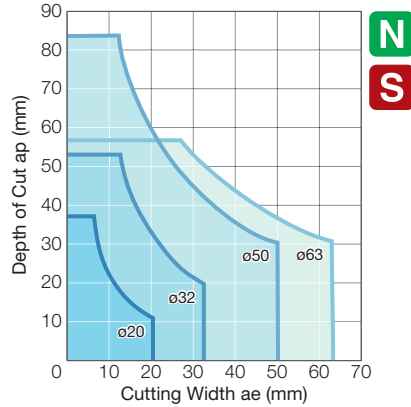

Note

- The depth of cut figures above are guidelines for use with BT50 machine tools. Use a depth of cut of approximately 50% if using BT40.
- For a tool overhang of $L/D = 3$ or $L/D = 4$, use a depth of cut of approximately 50% or 25%, respectively.
- There may be cases where machining cannot be performed at the depth of cut figures above, depending on the machine rigidity and work rigidity.
- Refer to H58 for the cutting speed and feed rate.


WEZR 11000RS type



New

Rake Angle	Radial	-11° to -9°	44 to 53 mm	90°
	Axial	14° to 15°		

Shoulder Milling Groove Milling Side Milling

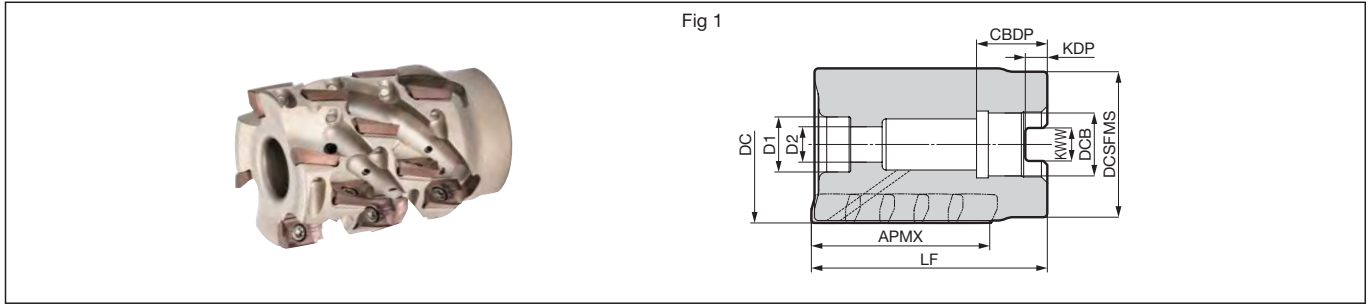

Body (Shell type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Total No. of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
WEZR 11040RS4416Z04	●	40	44(43)	37	60(59.7)	16	8.4	5.6	18	14	9	20	5	4	0.27	1
11050RS5322Z04	●	50	53(52)	47	70(69.7)	22	10.4	6.3	20	18	11	24	6	4	0.57	1

The APMX and LF dimensions in parentheses are dimensions using RE = 3.0/3.2 insert.
Take note of the cutter mounting size (DCB) when selecting a cutter. Inserts are sold separately.

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Bolt	Anti-seizure Cream	
WEZR 11040RS4416Z04 WEZR 11050RS5322Z04	BFTX0306IP	1.5	TRDR08IP	BX0850 BX1060	SUMI-P

Identification Code

WEZR 11 040 R S 44 16 Z04

Series Code	Insert Size	Dia.	Feed Direction	Metric Bore	Max. Depth of Cut	Mounting Hole Diameter	Effective No. of Teeth
-------------	-------------	------	----------------	-------------	-------------------	------------------------	------------------------

Recommended Cutting Conditions

ISO	Work Material	Hardness	Chipbreaker	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	≤ 280HB	G	80 - 150 - 200	0.08 - 0.12 - 0.20	ACU2500 XCU2500
		> 280HB	G	80 - 100 - 120	0.08 - 0.12 - 0.20	ACP2000 ACP3000
	Alloy Steel	≤ 280HB	G	80 - 150 - 180	0.08 - 0.12 - 0.20	
M	Stainless Steel	≤ 280HB	G	80 - 120 - 160	0.08 - 0.12 - 0.20	ACU2500 ACM200 ACM300
K	Cast Iron/ Ductile Cast Iron	—	G	80 - 150 - 200	0.08 - 0.12 - 0.20	ACU2500 XCK2000 ACK2000 ACK3000
S	Exotic Alloy	—	G	40 - 50 - 60	0.08 - 0.12 - 0.20	ACU2500 ACM200 ACM300
N	Aluminum Alloy	Si ≤ 12.6%	S	300 - 500 - 800	0.05 - 0.10 - 0.15	DL2000
		Si > 12.6%	S	100 - 200 - 250	0.05 - 0.10 - 0.15	H20

Note

- The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
- There may be cases where machining cannot be performed under recommended cutting conditions, depending on the machine rigidity and work rigidity.

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.



Modify the C chamfering portion.

WEZ11 type

- Reworking guidelines
- Corner radius = 2.4: C1 (AOMT11T324PEER)
 - Corner radius = 3.0: C2.5 (AOMT11T330PEER)
 - Corner radius = 3.2: C2.5 (AOMT11T332PEER)


Standard: R1.

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig	
Process	High-speed/Light Cutting General-purpose Roughing	P	P	K	K	K	S	S	N	N	P				
Cat. No.		ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A		
AOMT 11T302PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	0.2	1
11T304PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	0.4	1
11T305PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	0.5	1
11T308PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
11T310PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	1.0	1
11T312PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
11T316PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
11T320PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	2.0	1
11T324PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	2.4	1
11T330PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	3.0	2
11T332PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	3.2	2
AOMT 11T304PEER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
11T308PEER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
11T312PEER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
11T316PEER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
AOET 11T302PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
11T304PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
11T305PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	0.5	1
11T308PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
11T310PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	1.0	1
11T312PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
11T316PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
11T320PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	2.0	1
11T324PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	2.4	1
11T330PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	3.0	2
11T332PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	3.2	2
AOET 11T302PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.2	1
11T304PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.4	1
11T305PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.5	1
11T308PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
11T310PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	1.0	1
11T312PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	1.2	1
11T316PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	1.6	1
11T320PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	2.0	1
11T324PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	2.4	1
11T330PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	3.0	2
11T332PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	3.2	2

-G: General-purpose, -H: Strong Edge, -F: Medium Finishing, -S: Non-Ferrous Metals.
Use peripheral inserts with RE of 0.8mm or less from the second stage and above.

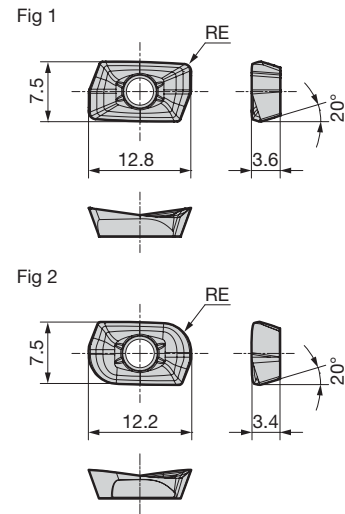

Recommended Cutting Conditions **H78**

Precautions for Mounting Inserts **H55**

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


WEZR 17000RS type



New Rake Angle: Radial -8° to -6°, Axial 7° to 15°. Dia. 29.57mm, 90°. Applications: Shoulder Milling, Groove Milling, Side Milling.



Fig 1



Body (Shell type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Total No. of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
WEZR 17050RS2922Z04	●	50	29(28)	47	50(49.3)	22	10.4	6.3	20	18	11	8	2	4	0.35	1
17050RS5722Z02	●	50	57(56)	47	80(79.3)	22	10.4	6.3	20	18	11	8	4	2	0.70	1
17050RS5722Z03	●	50	57(56)	47	80(79.3)	22	10.4	6.3	20	18	11	12	4	3	0.59	1
17063RS2927Z05	●	63	29(28)	60	55(54.3)	27	12.4	7	22	20	14	10	2	5	0.74	1
17063RS5727Z03	●	63	57(56)	60	80(79.3)	27	12.4	7	22	20	14	12	4	3	1.11	1
17063RS5727Z04	●	63	57(56)	60	80(79.3)	27	12.4	7	22	20	14	16	4	4	1.05	1
17080RS5627Z05	●	80	56(55)	70	80(79.3)	27	12.4	7	22	20	14	20	4	5	1.85	1
17080RS5632Z05	●	80	56(55)	70	80(79.3)	32	14.4	8	26	25	18	20	4	5	1.76	1

The APMX and LF dimensions in parentheses are dimensions using RE = 5.0/6.4 insert. Take note of the cutter mounting size (DCB) when selecting a cutter. Inserts are sold separately.

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Detachable Wrench		Bolt	Anti-seizure Cream
			Handle Grip	Bit		
WEZR 17050RS2922Z04	BFTX0409IP	3.0	HPS1015	TRB15IP	BX1045	SUMI-P
WEZR 17050RS5722Z02					BX1070	
WEZR 17050RS5722Z03					BX1240	
WEZR 17063RS2927Z05					BX1240	
WEZR 17063RS5727Z03					BX1265	
WEZR 17063RS5727Z04					BX1265	
WEZR 17080RS5627Z05					TRDR15IP	
WEZR 17080RS5627Z05					TRDR15IP	
WEZR 17080RS5632Z05					TRDR15IP	
WEZR 17080RS5632Z05					TRDR15IP	

Recommended Cutting Conditions

ISO	Work Material	Hardness	Chipbreaker	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	≤ 280HB	G	80 - 150 - 200	0.10 - 0.20 - 0.30	ACU2500
		> 280HB	G	80 - 100 - 120	0.10 - 0.20 - 0.30	XCU2500
	Alloy Steel	≤ 280HB	G	80 - 150 - 180	0.10 - 0.20 - 0.30	ACP2000
M	Stainless Steel	≤ 280HB	G	80 - 120 - 160	0.10 - 0.20 - 0.30	ACU2500
K	Cast Iron/ Ductile Cast Iron	—	G	80 - 150 - 200	0.10 - 0.20 - 0.30	ACM200
						ACM300
S	Exotic Alloy	—	G	40 - 50 - 60	0.10 - 0.20 - 0.30	ACU2500
						ACM200
N	Aluminum Alloy	Si ≤ 12.6%	S	300 - 500 - 800	0.05 - 0.10 - 0.15	DL2000
		Si > 12.6%	S	100 - 200 - 250	0.05 - 0.10 - 0.15	H20

Note - The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
- There may be cases where machining cannot be performed under recommended cutting conditions, depending on the machine rigidity and work rigidity.

Identification Code

WEZR 17 050 R S 29 22 Z04

Series Code Insert Size Dia. Feed Direction Metric Bore Max. Depth of Cut Mounting Hole Diameter Effective No. of Teeth

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.



Modify the C chamfering portion.

WEZR17 type


- Reworking guidelines
- Corner radius = 2.4: C1 (AOMT170524PEER)
 - Corner radius = 3.0: C1.5 (AOMT170530PEER)
 - Corner radius = 3.2: C1.5 (AOMT170532PEER)
 - Corner radius = 4.0: C2 (AOMT170540PEER)
 - Corner radius = 5.0: C5 (AOMT170550PEER)
 - Corner radius = 6.4: C5 (AOMT170564PEER)

Standard: R1.

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig	
Process	High-speed/Light Cutting General-purpose Roughing	P	M	K	K	S	S	S	N	N	P				
Cat. No.		ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A		
AOMT 170502PEER-L	●	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-L	●	●	—	—	—	—	—	—	—	—	—	—	●	0.4	1
170508PEER-L	●	●	—	—	—	—	—	—	—	—	—	—	●	0.8	1
170512PEER-L	●	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-L	●	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
AOMT 170502PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	0.2	1
170504PEER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	0.4	1
170505PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	●	0.8	1
170510PEER-G	●	—	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	1.6	1
170520PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	2.0	1
170524PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	2.4	1
170530PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	3.0	1
170532PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	3.2	1
170540PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	4.0	1
170550PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	5.0	2
170564PEER-G	●	●	—	—	—	—	—	—	—	—	—	—	—	6.4	2
AOMT 170504PEER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
170508PEER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
170512PEER-H	●	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-H	●	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
AOET 170502PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
170504PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
170505PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	0.5	1
170508PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
170510PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	1.0	1
170512PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
170516PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
170520PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	2.0	1
170524PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	2.4	1
170530PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	3.0	1
170532PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	3.2	1
170540PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	4.0	1
170550PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	5.0	2
170564PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	—	6.4	2
AOET 170502PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.2	1
170504PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.4	1
170505PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.5	1
170508PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
170510PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	1.0	1
170512PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	1.2	1
170516PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	1.6	1
170520PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	2.0	1
170524PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	2.4	1
170530PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	3.0	1
170532PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	3.2	1
170540PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	4.0	1
170550PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	5.0	2
170564PEFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	6.4	2

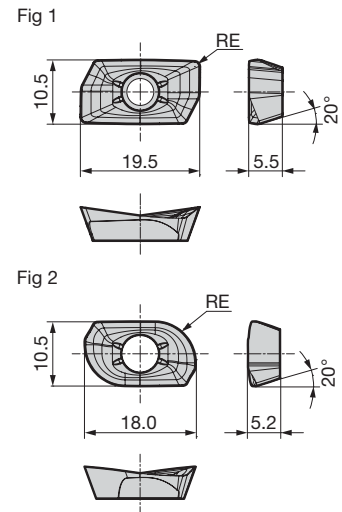

-L: Low Cutting Force, -G: General-purpose, -H: Strong Edge, -F: Medium Finishing, -S: Non-Ferrous Metals.
Use peripheral inserts with RE of 0.8mm or less from the second stage and above.

Recommended Cutting Conditions **H80**

Precautions for Mounting Inserts **H55**

WEZR 11000E type




New

Rake Angle	Radial	-15° to -11°
	Axial	8° to 14°

19.61mm 90°

Shoulder Milling Groove Milling Side Milling

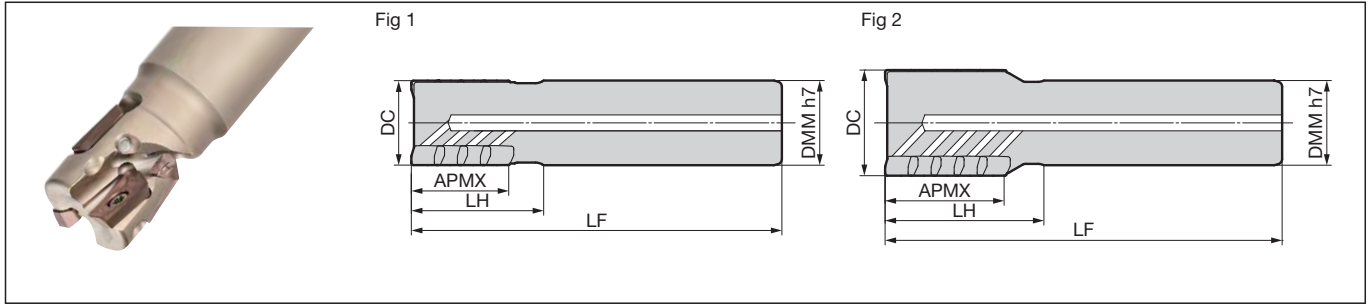

Body (Shank type)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
WEZR 11020E1920Z02	●	20	19(18)	20	30(29.7)	110(109.7)	4	2	2	0.22	1
11020E3620Z01	●	20	36(35)	20	45(44.7)	125(124.7)	4	4	1	0.24	1
11025E2725Z02	●	25	27(26)	25	40(39.7)	130(129.7)	6	3	2	0.41	1
11025E3625Z02	●	25	36(35)	25	50(49.7)	140(139.7)	8	4	2	0.42	1
11030E5325Z02	●	30	53(52)	25	65(64.7)	155(154.7)	12	6	2	0.52	2
11032E3632Z02	●	32	36(35)	32	50(49.7)	140(139.7)	8	4	2	0.74	1
11032E3632Z03	●	32	36(35)	32	50(49.7)	140(139.7)	12	4	3	0.71	1
11032E5332Z02	●	32	53(52)	32	70(69.7)	160(159.7)	12	6	2	0.90	1
11035E5332Z03	●	35	53(52)	32	65(64.7)	155(154.7)	18	6	3	0.88	2
11040E4432Z03	●	40	44(43)	32	60(59.7)	150(149.7)	15	5	3	0.87	2
11040E4432Z04	●	40	44(43)	32	60(59.7)	150(149.7)	20	5	4	0.85	2
11040E6132Z03	●	40	61(60)	32	75(74.7)	165(164.7)	21	7	3	0.95	2

The APMX, LH and LF dimensions in parentheses are dimensions using RE = 3.0/3.2 insert. Inserts are sold separately.

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	1.5 TRDR08IP	SUMI-P

Identification Code

WEZR 11 032 E 36 32 Z02

Series Code Insert Size Dia. Shank type Max. Depth of Cut Shank Dia. Effective No. of Teeth

Recommended Cutting Conditions

ISO	Work Material	Hardness	Chipbreaker	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
				Min. - Optimum - Max.	Min. - Optimum - Max.			
P	Carbon Steel	≤ 280HB	G	80 - 150 - 200	0.08 - 0.12 - 0.20	ACU2500 XCU2500 ACP2000 ACP3000		
		> 280HB	G	80 - 100 - 120	0.08 - 0.12 - 0.20			
M	Alloy Steel	≤ 280HB	G	80 - 150 - 180	0.08 - 0.12 - 0.20	ACU2500 ACM200 ACM300		
		> 280HB	G	80 - 120 - 160	0.08 - 0.12 - 0.20			
K	Stainless Steel	≤ 280HB	G	80 - 150 - 200	0.08 - 0.12 - 0.20	ACU2500 XCK2000 ACK2000 ACK3000		
S	Cast Iron/Ductile Cast Iron	—	G	40 - 50 - 60	0.08 - 0.12 - 0.20	ACU2500 ACM200 ACM300		
N	Exotic Alloy	Si ≤ 12.6%	S	300 - 500 - 800	0.05 - 0.10 - 0.15	DL2000 H20		
		Si > 12.6%	S	100 - 200 - 250	0.05 - 0.10 - 0.15			

Note · The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
· There may be cases where machining cannot be performed under recommended cutting conditions, depending on the machine rigidity and work rigidity.

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.



Modify the C chamfering portion.


- WEZR11 type**
- Reworking guidelines
- Corner radius = 2.4: C1 (AOMT11T324PEER)
 - Corner radius = 3.0: C2.5 (AOMT11T330PEER)
 - Corner radius = 3.2: C2.5 (AOMT11T332PEER)

Standard: R1.

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig	
Process	High-speed/Light Cutting General-purpose Roughing														
Cat. No.		ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A		
AOMT	11T302PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.2	1
	11T304PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.4	1
	11T305PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.5	1
	11T308PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
	11T310PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	1.0	1
	11T312PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	1.2	1
	11T316PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	1.6	1
	11T320PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	2.0	1
	11T324PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	2.4	1
	11T330PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	3.0	2
	11T332PEER-G	●	●	●	●	●	●	●	●	●	—	—	●	3.2	2
AOMT	11T304PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
	11T308PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
	11T312PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
	11T316PEER-H	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
AOET	11T302PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	11T304PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	11T305PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
	11T308PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	11T310PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
	11T312PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
	11T316PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	1.6	1
	11T320PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.0	1
	11T324PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	2.4	1
	11T330PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.0	2
	11T332PEER-F	●	—	—	—	—	—	—	—	—	—	—	—	3.2	2
AOET	11T302PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	11T304PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	11T305PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
	11T308PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	11T310PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
	11T312PEER-P20	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET	11T302PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	11T304PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	11T305PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.5	1
	11T308PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	11T310PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	1.0	1
	11T312PEER-P25	●	—	—	—	—	—	—	—	—	—	—	—	1.2	1
AOET	11T302PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.2	1
	11T304PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.4	1
	11T305PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.5	1
	11T308PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
	11T310PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.0	1
	11T312PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.2	1
	11T316PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	1.6	1
	11T320PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	2.0	1
	11T324PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	2.4	1
	11T330PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	3.0	2
	11T332PEFR-S	—	—	—	—	—	—	—	—	—	●	●	—	3.2	2

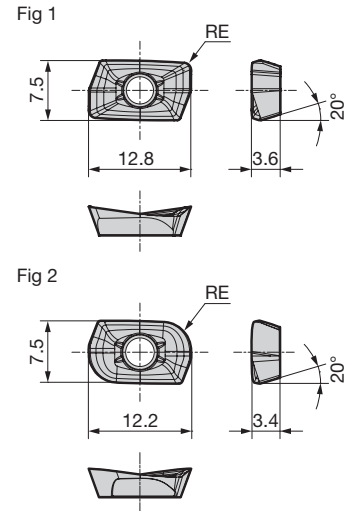

-G: General-purpose, -H: Strong Edge, -F: Medium Finishing, -P20/-P25: High-precision Machining,

-S: Non-Ferrous Metals.

*-P20 is applicable to cutter diameter ø20. -P25 is applicable to cutter diameter ø25.

Use peripheral inserts with RE of 0.8mm or less from the second stage and above.

Recommended Cutting Conditions H82

Precautions for Mounting Inserts H55

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


WEZR 17000E type



New

Rake Angle	Radial	-9° to -8°	29.84mm 90°
	Axial	10° to 12°	

Shoulder Milling Groove Milling Side Milling

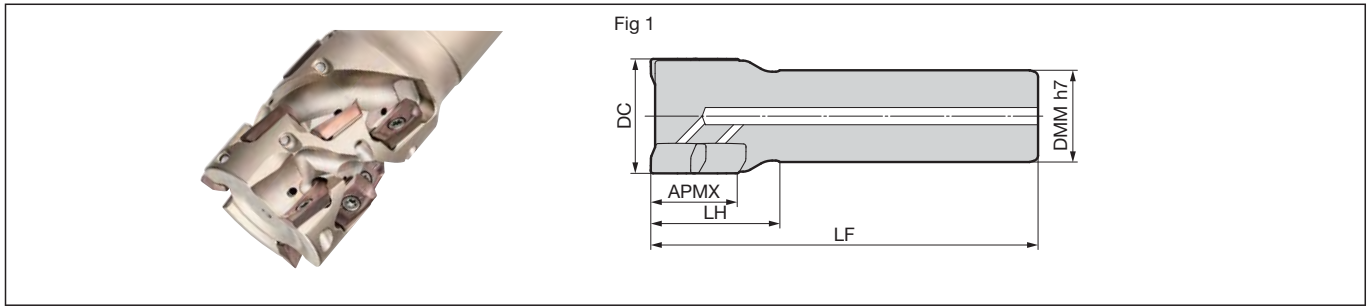

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
WEZR 17040E2932Z03	●	40	29(28)	32	45(44.3)	135(134.3)	6	2	3	0.75	1
17040E4332Z02	●	40	43(42)	32	60(59.3)	150(149.3)	6	3	2	0.86	1
17050E5742Z03	●	50	57(56)	42	75(74.3)	165(164.3)	12	4	3	1.58	1
17050E8442Z02	●	50	84(83)	42	105(104.3)	195(194.3)	12	6	2	1.94	1

The APMX, LH and LF dimensions in parentheses are dimensions using RE = 5.0/6.4 insert. Inserts are sold separately.

Parts

Flat Insert Screw	Integrated Wrench	Anti-seizure Cream
BFTX0409IP	3.0	TRDR15IP SUMI-P

Identification Code

WEZR 17 040 E 29 32 Z03

Series Code Insert Size Dia. Shank type Max. Depth of Cut Shank Dia. Effective No. of Teeth

Recommended Cutting Conditions

ISO	Work Material	Hardness	Chipbreaker	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
				Min. - Optimum - Max.	Min. - Optimum - Max.			
P	Carbon Steel	≤ 280HB	G	80 - 150 - 200	0.10 - 0.20 - 0.30	ACU2500 XCU2500 ACP2000 ACP3000		
		> 280HB	G	80 - 100 - 120	0.10 - 0.20 - 0.30			
M	Alloy Steel	≤ 280HB	G	80 - 150 - 180	0.10 - 0.20 - 0.30	ACU2500 ACM200 ACM300		
		Stainless Steel	G	80 - 120 - 160	0.10 - 0.20 - 0.30			
K	Cast Iron/ Ductile Cast Iron	—	G	80 - 150 - 200	0.10 - 0.20 - 0.30	ACU2500 XCK2000 ACK2000 ACK3000		
		Exotic Alloy	G	40 - 50 - 60	0.10 - 0.20 - 0.30			
S	Aluminum Alloy	Si ≤ 12.6%	S	300 - 500 - 800	0.05 - 0.10 - 0.15	ACU2500 ACM200 ACM300		
		Si > 12.6%	S	100 - 200 - 250	0.05 - 0.10 - 0.15			
N	DL2000 H20							

Note

- The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
- There may be cases where machining cannot be performed under recommended cutting conditions, depending on the machine rigidity and work rigidity.

* Modification of the cutter body is required when using inserts with corner radius RE 2.4 or larger.



Modify the C chamfering portion.

WEZR17 type

- Reworking guidelines
- Corner radius = 2.4: C1 (AOMT170524PEER)
 - Corner radius = 3.0: C1.5 (AOMT170530PEER)
 - Corner radius = 3.2: C1.5 (AOMT170532PEER)
 - Corner radius = 4.0: C2 (AOMT170540PEER)
 - Corner radius = 5.0: C5 (AOMT170550PEER)
 - Corner radius = 6.4: C5 (AOMT170564PEER)

Standard: R1.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed

Insert

Dimensions (mm)

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig	
	High-speed/Light Cutting	P	K	K	S	S	S	S	H20	N	P			
Process	General-purpose	P	K	K	S	S	S	S	N	N				
	Roughing	P	K	K	S	S	S	S						
Cat. No.	ACU2500	XCU2500	ACP2000	ACP3000	XCK2000	ACK2000	ACK3000	ACM200	ACM300	H20	DL2000	T2500A		
AOMT 170502PEER-L	●												0.2	1
170504PEER-L	●	●										●	0.4	1
170508PEER-L	●	●										●	0.8	1
170512PEER-L	●												1.2	1
170516PEER-L	●												1.6	1
AOMT 170502PEER-G	●	●		●	●	●	●	●	●				0.2	1
170504PEER-G	●	●	●	●	●	●	●	●	●			●	0.4	1
170505PEER-G	●												0.5	1
170508PEER-G	●	●										●	0.8	1
170510PEER-G	●												1.0	1
170512PEER-G	●	●		●	●		●	●	●				1.2	1
170516PEER-G	●	●					●	●	●				1.6	1
170520PEER-G	●	●		●	●		●	●	●				2.0	1
170524PEER-G	●	●					●	●	●				2.4	1
170530PEER-G	●	●		●	●		●	●	●				3.0	1
170532PEER-G	●	●		●	●		●	●	●				3.2	1
170540PEER-G	●	●		●	●		●	●	●				4.0	1
170550PEER-G	●	●		●	●		●	●	●				5.0	2
170564PEER-G	●	●		●	●		●	●	●				6.4	2
AOMT 170504PEER-H	●	●	●	●	●	●	●	●	●				0.4	1
170508PEER-H	●	●	●	●	●	●	●	●	●				0.8	1
170512PEER-H	●												1.2	1
170516PEER-H	●												1.6	1
AOET 170502PEER-F	●												0.2	1
170504PEER-F	●												0.4	1
170505PEER-F	●												0.5	1
170508PEER-F	●												0.8	1
170510PEER-F	●												1.0	1
170512PEER-F	●												1.2	1
170516PEER-F	●												1.6	1
170520PEER-F	●												2.0	1
170524PEER-F	●												2.4	1
170530PEER-F	●												3.0	1
170532PEER-F	●												3.2	1
170540PEER-F	●												4.0	1
170550PEER-F	●												5.0	2
170564PEER-F	●												6.4	2
AOET 170502PEFR-S										●	●		0.2	1
170504PEFR-S										●	●		0.4	1
170505PEFR-S										●	●		0.5	1
170508PEFR-S										●	●		0.8	1
170510PEFR-S										●	●		1.0	1
170512PEFR-S										●	●		1.2	1
170516PEFR-S										●	●		1.6	1
170520PEFR-S										●	●		2.0	1
170524PEFR-S										●	●		2.4	1
170530PEFR-S										●	●		3.0	1
170532PEFR-S										●	●		3.2	1
170540PEFR-S										●	●		4.0	1
170550PEFR-S										●	●		5.0	2
170564PEFR-S										●	●		6.4	2

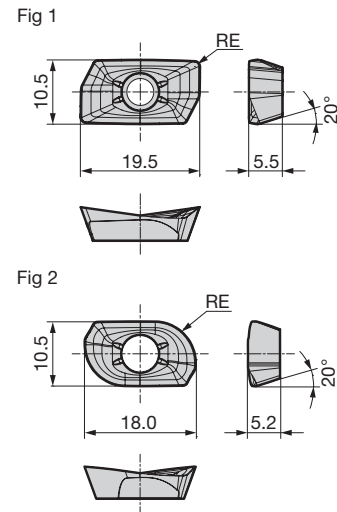

-L: Low Cutting Force, -G: General-purpose, -H: Strong Edge, -F: Medium Finishing, -S: Non-Ferrous Metals.
Use peripheral inserts with RE of 0.8mm or less from the second stage and above.

Recommended Cutting Conditions **H84**

Precautions for Mounting Inserts **H55**

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed




■ Features

Utilising an insert with a strong cutting edge design coupled with a high rigidity body, for stable and high-efficiency milling with low cutting force.

The improved body and insert accuracy realise high accuracy and smooth surface finish, supporting various machining with a selection of 6 types of chipbreakers and 9 milling grades.

Compatible with Wide Range of Milling

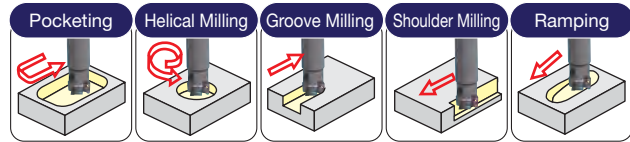

Higher Accuracy Cutting Edge with Both Sharpness and Cutting Edge Strength


Unique curved cutting edge design lowers cutting force yet improves cutting edge strength.

Achieves high quality machined surface with high precision cutting edge.

Smooth deep groove milling even with low-rigidity machines

High-precision Curved Cutting Edge

High Rake Wave Cutting Edge



Coolant Holes are a Standard Feature for the Whole Series
Improved chip evacuation with air or coolant supply

Highly Durable Body

Special surface treatment improves corrosion resistance and scratch resistance

Increased screw size improves clamping force and durability

WEX1000 Series

Enables multiple teeth high-efficiency milling for small stock removal amounts


Wide Variety of Inserts

6 types of chipbreaker and 9 milling grades available for a wide range of applications and work materials

■ WEX1000 Number of Teeth

Dia.	Number of Teeth		
	WEX1000E Standard type Max. Depth of Cut: 6.0mm	WEX1000EL Long type Max. Depth of Cut: 6.0mm	WEX2000E Standard type Max. Depth of Cut: 10.0mm
ø10mm	2	2	—
ø12mm	3	2	—
ø14mm	3	3	1
ø16mm	4	3	2

■ WEX Series Application Range (Shoulder Milling)

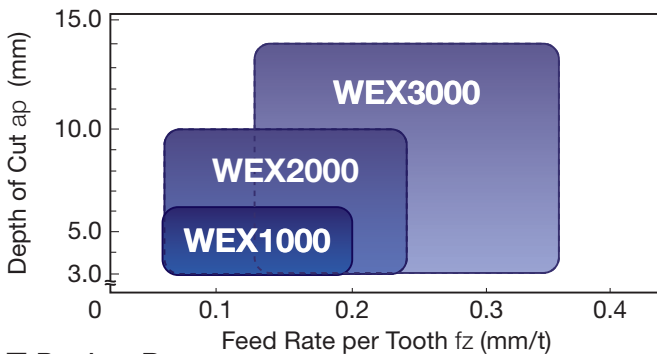

■ Product Range



Type	Cat. No.	Description	Dia. (mm)														Shape				
			ø10	ø12	ø14	ø16	ø18	ø20	ø22	ø25	ø28	ø30	ø32	ø35	ø40	ø50		ø63	ø80	ø100	ø125
Shell	WEX 1000F	Standard type										8		10	12	14					
	WEX 2000F	Standard type												6	7	8					
	WEX 3000F	Standard type												4	5	6					
	WEX 3000R	Standard type															4	5	6		
	WEXF 3000R	Fine Pitch															7	8	9		
Shank	WEX 1000E	Standard type	2	3	3	4	4	5		7											
	WEX 1000EL	Long type	2	2	3	3	3	4													
	WEX 2000E	Standard type			1	2	2	3	3	4	4	4	5		6	7	8				
	WEX 2000EL	Long type			1	2	2	2	2	2	2	2	2		2						
	WEX 3000E	Standard type								2	2	3	3	3	4	5	6				
	WEX 3000ES	Short type														5*	6*				
	WEX 3000EL	Long type								2	2	2	2	2	2						
	WEX 3000E-C	Coarse Pitch type													3	3	4				
	WEX 3000ES-C	Short & Coarse Pitch type														3*	4*				
Modular	WEX 2000M	Modular type			2	2	3	3	4	4	4	5		6							
	WEX 3000M	Modular type							2	2	3	3	3	4							

Number in ●●● shows the number of teeth Inch Bore *mark: Different diameter shanks in stock

■ Cutting Performance

(1) Shoulder milling precision

High-precision cutting edges provide very small step marks (less than half that of competitors' products)

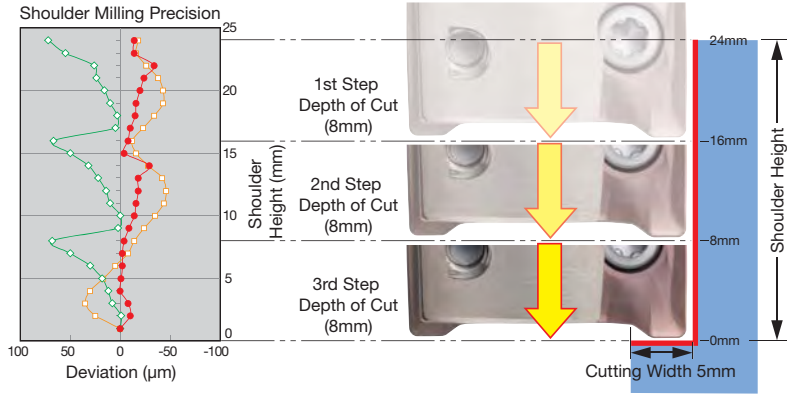

Cutting Conditions

Work Material: SS400

Tool: WEX3032E (ø32)

Insert: AXMT170508PEER-G

Grade: ACP200

Cutting Speed: $vc = 150\text{m/min}$

Feed Rate: $fz = 0.15\text{mm/t}$
($vf = 675\text{mm/min}$)


Cutting Width: $ae = 5\text{mm}$

Depth of Cut: $ap = 8\text{mm} \times 3$ times

Dry

(2) Cutting force

Cutting force (principal force) is approximately 15% lower than conventional tools

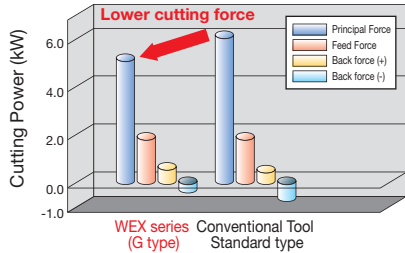

Cutting Conditions

Work Material: S50C

Tool: WEX3032E (ø32)

Insert: AXMT170508PEER-G

Grade: ACP200

Cutting Speed: $vc = 200\text{m/min}$


Feed Rate: $fz = 0.2\text{mm/t}$
($vf = 1,200\text{mm/min}$)

Cutting Width: $ae = 8\text{mm}$

Depth of Cut: $ap = 10\text{mm}$, Dry

(3) Fracture resistance

Huge increase in fracture resistance with improved cutting edge strength

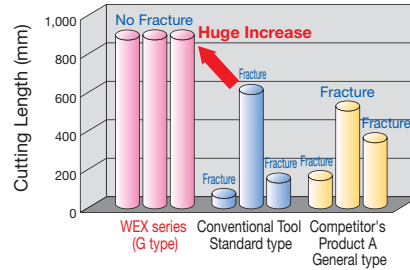

Cutting Conditions

Work Material: SCM440

Tool: WEX3032E (ø32)

Insert: AXMT170508PEER-G

Grade: ACP200

Cutting Speed: $vc = 100\text{m/min}$


Feed Rate: $fz = 0.4\text{mm/t}$
($vf = 1,260\text{mm/min}$)

Cutting Width: $ae = 25\text{mm}$

Depth of Cut: $ap = 3\text{mm}$, Dry

(4) Surface finish (aluminum alloy milling)

Smooth surface finish free of white blemishes

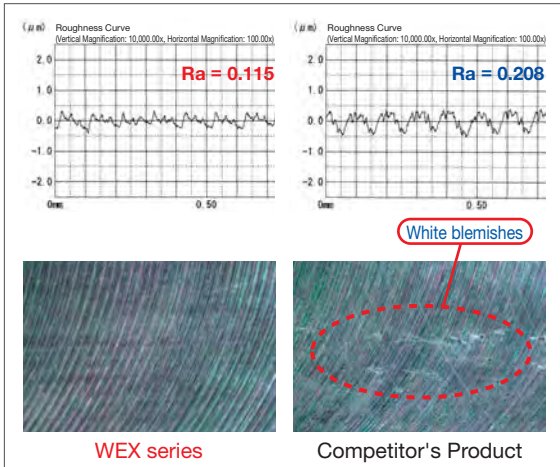

Cutting Conditions

Work Material: A5052

Tool: WEX3032E (ø32)

Insert: AXET170504PEFR-S (H1)

Cutting Speed: $vc = 800\text{m/min}$


Feed Rate: $fz = 0.1\text{mm/t}$
($vf = 2,400\text{mm/min}$)

Cutting Width: $ae = 16\text{mm}$

Depth of Cut: $ap = 10\text{mm}$, Dry

(5) Wall surface burrs (aluminum alloy milling)

High rake edge significantly reduces burrs

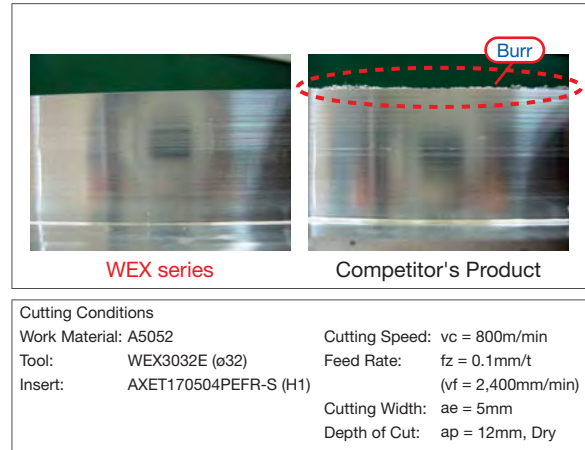

Cutting Conditions

Work Material: A5052

Tool: WEX3032E (ø32)

Insert: AXET170504PEFR-S (H1)

Cutting Speed: $vc = 800\text{m/min}$

Feed Rate: $fz = 0.1\text{mm/t}$
($vf = 2,400\text{mm/min}$)


Cutting Width: $ae = 5\text{mm}$

Depth of Cut: $ap = 12\text{mm}$, Dry

■ Chipbreaker Selection

Work Material	PK			MS		N
Applications	Light Cutting, Low Rigidity Milling and Reduction of Burrs	Main Chipbreaker General-purpose to Interrupted Milling	Roughing, Heavy Interrupted Cutting and Hardened Steel Milling	Light Cutting to General-purpose	Heavy Interrupted Machining	Aluminum Alloy and Non-Ferrous Metal
Features	Low Cutting Force	General-purpose type	High Strength type	General-purpose type For Exotic Alloys	Strong Edge type For Exotic Alloys	High Rake type
Chipbreaker	L type	G type	H type	E type	EH type	S type
1000 Series Cross Section						
2000 Series Cross Section						
3000 Series Cross Section						

■ Chipbreaker Selection Guide

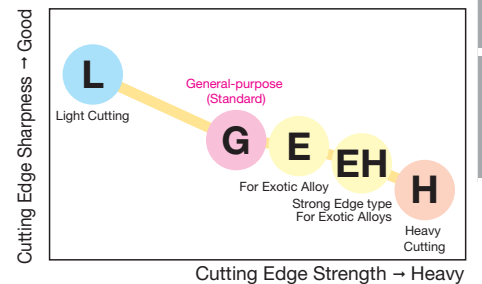

Recommended Cutting Conditions

WEX1000

Tool: WEX1012E, Insert: AX□T0602

Cutting Conditions: Depth of Cut ap = 4mm, Width of Cut ae = 1mm, Dry

Cutting Width
ae = 1mm

Depth of Cut
ap = 4mm



ISO Classification	Work Material	Workpiece Hardness (HB)	Chipbreaker	Grade																				
				ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	DL1000													
				Feed Rate per Tooth fz (mm/t)																				
				Cutting Speed vc (m/min)																				
P	Steel, Carbon Steel S15C	125	G	260	240	220	240	220	200	220	200	180												
	S45C	190	G	200	180	160	180	160	140	180	160	140												
	S45C Hardened	250	G	180	120	140	160	140	120	150	130	110												
	S75C	270	G	160	140	120	150	130	110	130	110	110												
	S75C Hardened	300	G	100	80	70	90	70	60	70	60	50												
	Low Alloy Steel (SCM, SNCM)	180	G	200	180	160	180	160	150	160	150	130												
	SCM, SNCM Hardened	275	G	130	110	90	120	100	90	100	90	80												
	SCM, SNCM Hardened	300	G	120	100	80	100	90	80	90	80	60												
	SCM, SNCM Hardened	350	G	90	80	60	80	70	60	70	60	40												
	High Alloy Steel (SKD, SKT, SKH)	200	G	180	170	160	170	160	130	150	140	120												
	SKD, SKT, SKH Hardened	325	G	100	80	60	80	60	50	60	50	30												
	M	Stainless Steel SUS430 and Others (Martensitic/Ferritic)	200	E												170	150	120	140	130	110			
		SUS403 and Others (Martensitic/Hardened)	240	E												140	120	100	120	100	90			
		SUS304, SUS316 (Austenitic)	180	E												180	160	140	160	140	130			
K	Cast Iron		G												240	220	200	220	200	180				
	Ductile Cast Iron		G												160	140	120	140	120	100				
S	Exotic Alloy		E														50	35	45	25				
N	Aluminum Alloy Si Content of 12.6% or less		S																		800	600	400	
	Si Content of over 12.6%		S																			240	200	160
	Copper Alloy		S																			330	300	270

- The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, workpiece shape, clamping system).
- For groove milling, adjust the feed rate to around 70% of the above values.

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WEX2000

Tool: WEX2025E, Insert: AX□T1235

Cutting Conditions: Depth of Cut ap = 3mm, Width of Cut ae = 12.5mm, Dry

Cutting Width ae = 12.5mm

Depth of Cut ap = 3mm



ISO Classification	Work Material	Workpiece Hardness (HB)	Chipbreaker	Grade																								
				ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	DL1000																	
				Feed Rate per Tooth fz (mm/t)																								
				Cutting Speed vc (m/min)																								
P	Steel, Carbon Steel S15C	125	G	380	350	330	350	330	315	330	315	295																
	S45C	190	G	285	255	235	255	235	220	235	220	200																
	S45C Hardened	250	G	235	210	190	210	190	170	190	170	150																
	S75C	270	G	190	162	143	171	152	133	152	133	115																
	S75C Hardened	300	G	145	115	95	115	95	75	95	75	55																
	Low Alloy Steel (SCM, SNCM)	180	G	265	235	220	235	220	200	220	200	180																
	SCM, SNCM Hardened	275	G	170	145	125	150	130	115	130	115	95																
	SCM, SNCM Hardened	300	G	150	125	105	135	115	95	115	95	75																
	SCM, SNCM Hardened	350	G	125	95	75	105	85	65	85	65	45																
	High Alloy Steel (SKD, SKT, SKH)	200	G	235	210	190	210	190	170	190	170	150																
	SKD, SKT, SKH Hardened	325	G	125	95	75	95	75	55	75	55	35																
	M	Stainless Steel SUS430 and Others (Martensitic/Ferritic)	200	E												175	155	125	155	140	110							
		SUS403 and Others (Martensitic/Hardened)	240	EH												160	140	110	145	125	100							
		SUS304, SUS316 (Austenitic)	180	E												190	170	140	170	150	125							
K	Cast Iron		G												285	255	235	255	235	220								
	Ductile Cast Iron		G												190	160	140	160	140	125								
S	Exotic Alloy	300	E														50	40	45	35								
	(Heat-Resistant Alloy, Super Alloy, Titanium Alloy, etc.)	330	E														35	25	30	20								
N	Aluminum Alloy Si Content of 12.6% or less		S																			1000	750	500				
	Si Content of over 12.6%		S																				250	200	170			
	Copper Alloy		S																				350	330	300			

- The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, workpiece shape, clamping system).
- For groove milling, adjust the feed rate to around 70% of the above values.


Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

■ Recommended Cutting Conditions

WEX3000

Tool: WEX3032E, Insert: AXQT1705

Cutting Conditions: Depth of Cut $a_p = 5\text{mm}$, Width of Cut $a_e = 16\text{mm}$, Dry



ISO Classification	Work Material	Workpiece Hardness (HB)	Chipbreaker	Grade																							
				ACP100			ACP200			ACP300			ACK200			ACK300			ACM200			ACM300			DL1000		
				Feed Rate per Tooth f_z (mm/t)																							
				Cutting Speed v_c (m/min)																							
P	Steel, Carbon Steel S15C	125	G	400	370	350	370	350	330	350	330	310															
	S45C	190	G	300	270	250	270	250	230	250	230	210															
	S45C Hardened	250	G	250	220	200	220	200	180	200	180	160															
	S75C	270	G	200	170	150	180	160	140	160	140	120															
	S75C Hardened	300	G	150	120	100	120	100	80	100	80	60															
	Low Alloy Steel (SCM, SNCM)	180	G	280	250	230	250	230	210	230	210	190															
	SCM, SNCM Hardened	275	G	180	150	130	160	140	120	140	120	100															
	SCM, SNCM Hardened	300	G	160	130	110	140	120	100	120	100	80															
	SCM, SNCM Hardened	350	G	130	100	80	110	90	70	90	70	50															
	High Alloy Steel (SKD, SKT, SKH)	200	G	250	220	200	220	200	180	200	180	160															
SKD, SKT, SKH Hardened	325	G	130	100	80	100	80	60	80	60	40																
M	Stainless Steel SUS430 and Others (Martensitic/Ferritic)	200	E						185	165	135						185	165	135	165	150	120					
	SUS403 and Others (Martensitic/Hardened)	240	EH						170	150	120						170	150	120	150	135	110					
	SUS304, SUS316 (Austenitic)	180	E						200	180	150						200	180	150	180	160	135					
K	Cast Iron		G									300	270	250	270	250	230										
	Ductile Cast Iron		G									200	170	150	170	150	130										
S	Exotic Alloy	300	E											50	30		50	30		45	25						
	(Heat-Resistant Alloy, Super Alloy, Titanium Alloy, etc.)	330	E											50	30		50	30		45	25						
N	Aluminum Alloy Si Content of 12.6% or less		S																		1000	750	500				
	Si Content of over 12.6%		S																		250	200	170				
	Copper Alloy		S																		350	330	300				


- The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, workpiece shape, clamping system).
- For groove milling, adjust the feed rate to around 70% of the above values.

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


■ Recommended Values for Helical Milling and Ramping

Precautions for Helical Milling

For Minimum Diameter and Below




For Maximum Diameter and Above



Precautions for Ramping

Use at the RMPX at right or lower.



Recommended Values for Helical Milling and Ramping

Dia. (mm) DC	WEX1000 (AXQT06--)			WEX2000 (AXQT12--)			WEX3000 (AXQT17--)		
	Helical Milling (mm)		Ramping	Helical Milling (mm)		Ramping	Helical Milling (mm)		Ramping
	Machining Dia. ϕD		Maximum Ramp Angle RMPX	Machining Dia. ϕD		Maximum Ramp Angle RMPX	Machining Dia. ϕD		Maximum Ramp Angle RMPX
	Min. Dia.	Max. Dia.		Min. Dia.	Max. Dia.		Min. Dia.	Max. Dia.	
10	16.0	18.0	2°30'						
12	20.0	22.0	1°45'						
14	24.0	26.0	1°25'	25.0	27.0	1°40'			
16	28.0	30.0	1°00'	29.0	31.0	1°20'			
18	32.0	34.0	0°45'	33.0	35.0	1°10'			
20	36.0	38.0	0°30'	37.0	39.0	1°00'			
22				41.0	43.0	0°50'			
25	46.0	48.0	0°30'	47.0	49.0	0°45'	44.5	48.0	1°30'
28				53.0	55.0	0°45'	50.5	54.0	1°10'
30				57.0	59.0	0°40'	54.5	58.0	1°10'
32	60.0	62.0	0°25'	61.0	63.0	0°35'	58.5	62.0	1°00'
35							64.5	68.0	0°50'
40	76.0	78.0	0°20'	77.0	79.0	0°25'	74.5	78.0	0°45'
50	96.0	98.0	0°15'	97.0	99.0	0°20'	94.5	98.0	0°30'
63	122.0	124.0	0°10'	123.0	125.0	0°15'	120.5	124.0	0°20'
80							154.5	158.0	0°15'
100							Unusable	Unusable	Unusable
125							Unusable	Unusable	Unusable

The table above shows recommended values with corner radius 0.8mm.

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius Profiling

Side Cutters

T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

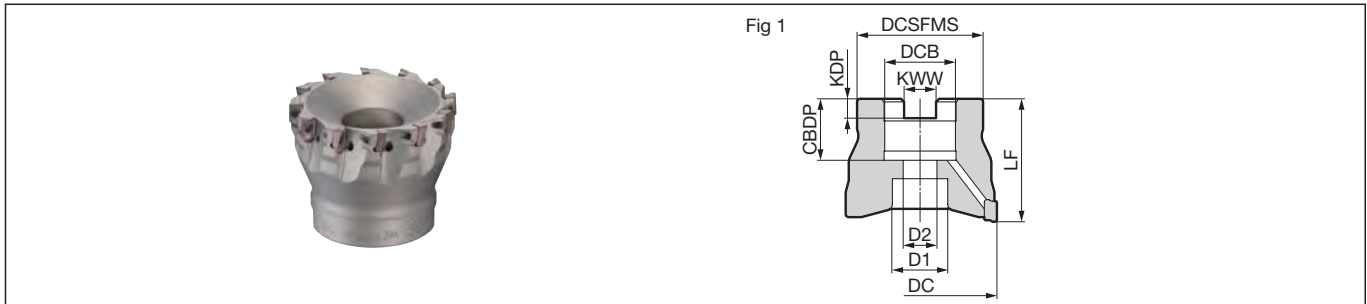

Body

Dimensions (mm)


	Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	WEX 1032F	●	32	31	40	16	8.4	5.6	18	14	9	8	0.16	1
	1040F	●	40	32	40	16	8.4	5.6	18	14	9	10	0.21	1
	1050F	●	50	38	40	22	10.4	6.3	20	18	11	12	0.30	1
	1063F	●	63	48	40	22	10.4	6.3	20	18	11	14	0.52	1

Inserts are sold separately.

Insert

Dimensions (mm)

Process	Grade Classification		Coated Carbide						Carbide	DLC		
	High-speed/Light	General-purpose	P	M	K	N	S	N	N			
	General-purpose	Roughing	P	M	K	N	S	N	N			
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Corner Radius RE	Fig	
AXMT 060204PDER-L	●	●	●	●	●	●	●	—	—	0.4	1	
060208PDER-L	●	●	●	●	●	●	●	—	—	0.8	1	
060212PDER-L	●	●	●	●	●	●	●	—	—	1.2	1	
060202PDER-G	●	●	●	●	●	●	●	—	—	0.2	1	
060204PDER-G	●	●	●	●	●	●	●	—	—	0.4	1	
060208PDER-G	●	●	●	●	●	●	●	—	—	0.8	1	
060212PDER-G	●	●	●	●	●	●	●	—	—	1.2	1	
060204PDER-H	●	●	●	●	●	●	●	—	—	0.4	1	
060208PDER-H	●	●	●	●	●	●	●	—	—	0.8	1	
060212PDER-H	●	●	●	●	●	●	●	—	—	1.2	1	
060202PDRF-S	—	—	—	—	—	—	—	●	●	0.2	1	



-L: Low Cutting Force, -G: General-purpose, -H: Strong Edge, -S: Aluminum Alloy.

Recommended Cutting Conditions **H88**

Parts

(Sold Separately)


Flat Insert Screw	Wrench	Anti-seizure Cream	Torque Wrench
BFTX01804IP	0.5	TRX06IP	SUMI-P
			TRDR06IP05

Identification Code

WEX 1 032 F


Series Code Insert Size Dia. Metric Bore

Precautions when Mounting WEX1000 Inserts

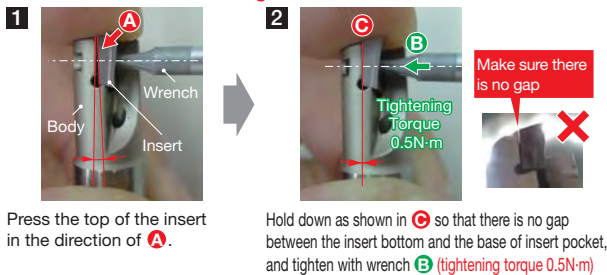

A dedicated torque wrench is optionally available (sold separately).

WEX 2000F type

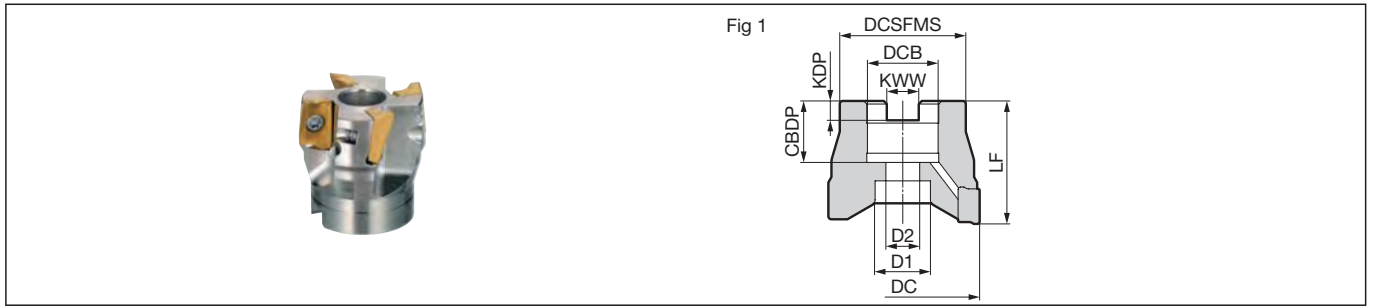

Body

Dimensions (mm)


	Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	WEX 2040F	●	40	32	40	16	8.4	5.6	18	14	9	6	0.19	1
	2050F	●	50	40	40	22	10.4	6.3	20	18	11	7	0.29	1
	2063F	●	63	50	40	22	10.4	6.3	20	18	11	8	0.51	1

Inserts are sold separately.

Insert

Dimensions (mm)

Grade Classification		Coated Carbide						Carbide	DLC		
Process	High-speed/Light	P		K		M		K	N		
	General-purpose	P	P	K		M	S		N		
	Roughing	P	P	K		M	S		N		
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Corner Radius RE	Fig
AXMT 123504PEER-G	●	●	●	●	●	—	—	—	—	0.4	1
123508PEER-G	●	●	●	●	●	—	—	—	—	0.8	1
123512PEER-G	●	●	●	●	●	—	—	—	—	1.2	1
AXMT 123504PEER-H	●	●	●	●	●	—	—	—	—	0.4	1
123508PEER-H	●	●	●	●	●	—	—	—	—	0.8	1
123512PEER-H	●	●	●	●	●	—	—	—	—	1.2	1
AXMT 123504PEER-E	—	—	—	—	—	●	●	—	—	0.4	1
123508PEER-E	—	—	—	—	—	●	●	—	—	0.8	1
123512PEER-E	—	—	—	—	—	●	●	—	—	1.2	1
AXMT 123508PEER-EH	—	—	—	—	—	●	●	—	—	0.8	1
AXET 123502PEFR-S	—	—	—	—	—	—	—	●	●	0.2	1
123504PEFR-S	—	—	—	—	—	—	—	●	●	0.4	1
123508PEFR-S	—	—	—	—	—	—	—	●	●	0.8	1

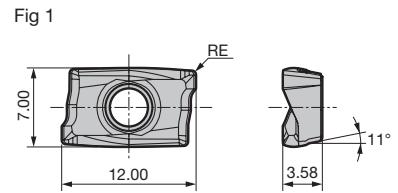

-G: General-purpose, -H: Strong Edge, -E, -EH: Exotic Alloy, -S: Aluminum Alloy.

Recommended Cutting Conditions H88

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	2.0 TRDR08IP	SUMI-P

Identification Code



WEX 2 040 F

Series Code Insert Size Dia. Metric Bore

WEX 3000F/R type WEXF 3000R type



Rake Angle	Radial Axial	12° to 15° 19° to 24°	14mm 90°
------------	--------------	--------------------------	-------------

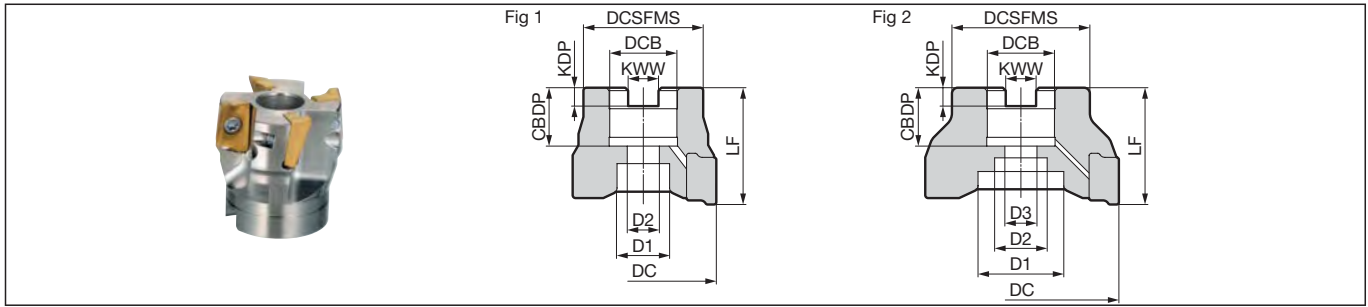

Body (Standard Pitch)

Cat. No.		Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Bolt D3	Number of Teeth	Weight (kg)	Fig
Metric	WEX 3040F	●	40	32	40	16	8.4	5.6	18	14	9	—	4	0.16	1
	3050F	●	50	40	40	22	10.4	6.3	20	18	11	—	5	0.25	1
	3063F	●	63	50	40	22	10.4	6.3	20	18	11	—	6	0.48	1
Inch	WEX 3080R	●	80	60	50	25.4	9.5	6	25	35	26	13.5	4	1.06	2
	3100R	●	100	70	63	31.75	12.7	8	32.5	46	28	17	5	1.99	2
	3125R	●	125	80	63	38.1	15.9	10	35.5	55	30	—	6	2.89	1

Body (Extra Fine Pitch)


Cat. No.		Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Bolt D3	Number of Teeth	Weight (kg)	Fig
Inch	WEXF 3080R	●	80	60	50	25.4	9.5	6	25	35	26	13.5	7	0.98	2
	3100R	●	100	70	63	31.75	12.7	8	32.5	46	28	17	8	1.91	2
	3125R	●	125	80	63	38.1	15.9	10	35.5	55	30	—	9	2.80	1

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Insert

Grade Classification	Coated Carbide						Carbide	DLC	Dimensions (mm)		
	P	M	K	N	S	H	N	Corner Radius RE	Fig		
High-speed/Light Cutting	●						●				
General-purpose		●	●	●	●	●					
Roughing		●	●	●	●	●					
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Corner Radius RE	Fig
AXMT 170508PEER-L	●	●	●	●	●	—	—	—	—	0.8	1
AXMT 170504PEER-G	●	●	●	●	●	—	—	—	—	0.4	1
170508PEER-G	●	●	●	●	●	—	—	—	—	0.8	1
170512PEER-G	●	●	●	●	●	—	—	—	—	1.2	1
170516PEER-G	●	●	●	●	●	—	—	—	—	1.6	1
170520PEER-G*	●	●	●	●	●	—	—	—	—	2.0	1
170530PEER-G*	●	●	●	●	●	—	—	—	—	3.0	1
AXMT 170508PEER-H	●	●	●	●	●	—	—	—	—	0.8	1
170512PEER-H	●	●	●	●	●	—	—	—	—	1.2	1
AXMT 170504PEER-E	—	—	—	—	—	●	●	—	—	0.4	1
170508PEER-E	—	—	—	—	—	●	●	—	—	0.8	1
170512PEER-E	—	—	—	—	—	●	●	—	—	1.2	1
170516PEER-E	—	—	—	—	—	●	●	—	—	1.6	1
170520PEER-E*	—	—	—	—	—	●	●	—	—	2.0	1
170530PEER-E*	—	—	—	—	—	●	●	—	—	3.0	1
AXMT 170508PEER-EH	—	—	—	—	—	●	●	—	—	0.8	1
AXET 170502PEFR-S	—	—	—	—	—	—	—	●	●	0.2	1
170504PEFR-S	—	—	—	—	—	—	—	●	●	0.4	1
170508PEFR-S	—	—	—	—	—	—	—	●	●	0.8	1

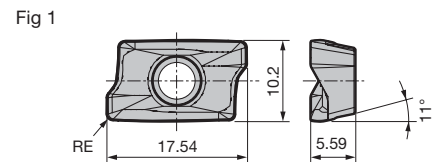

-L: Low Cutting force, -G: General-purpose, -H: Strong Edge, -E, -EH: Exotic Alloy, -S: Aluminum Alloy.
* marked inserts require modification of the cutter body.

Recommended Cutting Conditions **H89**

Parts

Flat Insert Screw	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit	
BFTX0409IP	HPS1015	TRB15IP	SUMI-P
3.0			

Identification Code

WEX 3 040 F

Series Code Insert Size Dia. F: Metric Bore R: Inch Bore

***Modification of the cutter body is required when using inserts with corner radius RE 2.0 or 3.0**

Modify this portion.
Reworking guidelines
For Corner Radius RE 2.0: C1 (AXMT170520PEER)
For Corner Radius RE 3.0: C1.5 (AXMT170530PEER)
Standard: C0.5.





WEX 1000E/EL type



Rake Angle	Radial	7° to 17°
	Axial	9° to 17°

6mm 90°

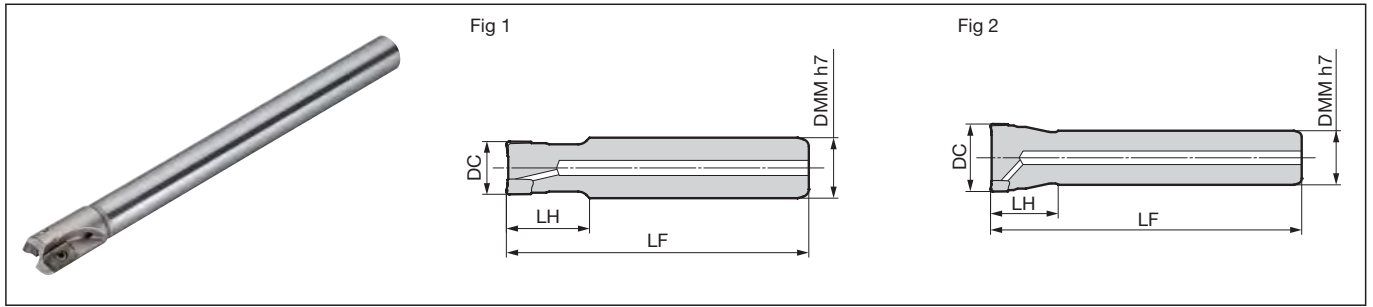

Body (Shank type)

Dimensions (mm)

Metric	Cat. No.		Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
		WEX 1010E	●	10	10	17	50	2	0.03	1
	1012E	●	12	12	20	80	3	0.06	1	
	1014E	●	14	16	22	80	3	0.10	1	
	1016E	●	16	16	20	90	4	0.12	1	
	1018E	●	18	20	22	100	4	0.21	1	
	1020E	●	20	20	22	100	5	0.22	1	
	1025E	●	25	20	25	115	7	0.27	2	

Body (Long Shank type)

Dimensions (mm)

Metric	Cat. No.		Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
		WEX 1010EL	●	10	8	17	100	2	0.03	2
	1012EL	●	12	10	20	120	2	0.06	2	
	1014EL	●	14	12	20	145	3	0.11	2	
	1016EL	●	16	14	20	160	3	0.17	2	
	1018EL	●	18	16	20	180	3	0.25	2	
	1020EL	●	20	18	25	200	4	0.36	2	

Inserts are sold separately.

Inserts are sold separately.


Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Dimensions (mm)

Grade Classification		Coated Carbide						Carbide	DLC	Corner Radius RE	Fig
Process	High-speed/Light Cutting	P	M	K	S	N	N				
	General-purpose										
	Roughing										
Cat. No.		ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	
AXMT 060204PDER-L	●	●	●	●	●	●	●	●	—	—	
060208PDER-L	●	●	●	●	●	●	●	●	—	—	
060212PDER-L	●	●	●	●	●	●	●	●	—	—	
AXMT 060202PDER-G	●	●	●	●	●	●	●	●	—	—	
060204PDER-G	●	●	●	●	●	●	●	●	—	—	
060208PDER-G	●	●	●	●	●	●	●	●	—	—	
060212PDER-G	●	●	●	●	●	●	●	●	—	—	
AXMT 060204PDER-H	●	●	●	●	●	●	●	●	—	—	
060208PDER-H	●	●	●	●	●	●	●	●	—	—	
060212PDER-H	●	●	●	●	●	●	●	●	—	—	
AXMT 060202PDER-S	—	—	—	—	—	—	—	—	●	●	

Fig 1



-L: Low Cutting Force, -G: General-purpose, -H: Strong Edge, -S: Aluminum Alloy.

Recommended Cutting Conditions H88

Identification Code

WEX 1 010 E L

Series Code Insert Size Dia. Shank type Long type

Parts

(Sold Separately)

Flat Insert Screw	Wrench	Anti-seizure Cream	Torque Wrench
BFTX01804IP	0.5	TRX06IP	SUMI-P
			TRDR06IP05

Precautions when Mounting WEX1000 Inserts

1 Press the top of the insert in the direction of **A**.

2 Hold down as shown in **C** so that there is no gap between the insert bottom and the base of insert pocket, and tighten with wrench **B** (tightening torque 0.5N·m)

Make sure there is no gap


A dedicated torque wrench is optionally available (sold separately).

WEX 2000E/EL type



Milling Cutters

H

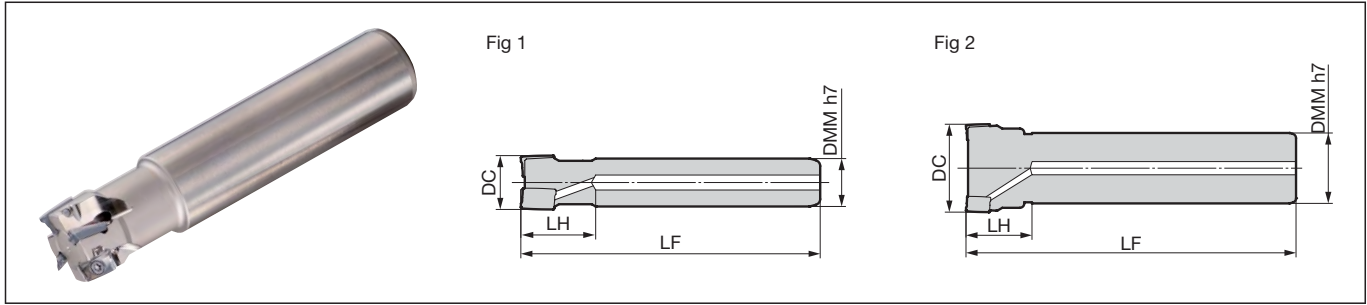

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEX 2014E	●	14	16	25	80	1	0.10	1
2016E	●	16	16	25	100	2	0.13	1
2018E	●	18	16	25	100	2	0.14	2
2020E	●	20	20	30	110	3	0.22	1
2022E	●	22	20	30	110	3	0.23	2
2025E	●	25	25	35	120	4	0.38	1
2028E	●	28	25	35	120	4	0.39	2
2030E	●	30	25	35	120	4	0.40	2
2032E	●	32	32	40	130	5	0.70	1
2040E	●	40	32	30	150	6	0.91	2
2050E	●	50	32	30	150	7	1.02	2
2063E	●	63	32	30	150	8	1.22	2

Body (Long Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEX 2014EL	●	14	16	25	120	1	0.14	1
2016EL	●	16	16	25	145	2	0.19	1
2018EL	●	18	16	25	145	2	0.19	2
2020EL	●	20	20	40	150	2	0.32	1
2022EL	●	22	20	30	150	2	0.33	2
2025EL	●	25	25	50	170	2	0.55	1
2028EL	●	28	25	30	170	2	0.59	2
2030EL	●	30	25	30	170	2	0.60	2
2032EL	●	32	32	60	180	2	0.99	1
2040EL	●	40	32	30	180	2	1.12	2

Inserts are sold separately.

Inserts are sold separately.


Insert

Dimensions (mm)

Grade Classification	Coated Carbide					Carbide	DLC	Corner Radius RE	Fig
	P	M	K	N	S	H1	DL1000		
High-speed/Light Cutting	●					●	●		
General-purpose		●	●	●	●			●	
Roughing		●	●	●	●				
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300		
AXMT 123504PEER-G	●	●	●	●	●			0.4	1
123508PEER-G	●	●	●	●	●			0.8	1
123512PEER-G	●	●	●	●	●			1.2	1
AXMT 123504PEER-H	●	●	●	●	●			0.4	1
123508PEER-H	●	●	●	●	●			0.8	1
123512PEER-H	●	●	●	●	●			1.2	1
AXMT 123504PEER-E						●	●	0.4	1
123508PEER-E						●	●	0.8	1
123512PEER-E						●	●	1.2	1
AXMT 123508PEER-EH						●	●	0.8	1
AXET 123502PEFR-S								0.2	1
123504PEFR-S								0.4	1
123508PEFR-S								0.8	1

-G: General-purpose, -H: Strong Edge, -E, -EH: Exotic Alloy, -S: Aluminum Alloy.

Fig 1

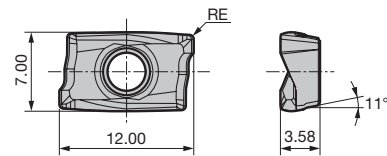

Recommended Cutting Conditions H88

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream	
	WEX2014E(EL) to WEX2018E(EL)	BFTX03051P	2.0	TRDR081P
WEX2020E(EL) to WEX2063E	BFTX03061P	2.0	TRDR081P	SUMI-P

Identification Code



WEX 2 014 E L
 Series Code Insert Size Dia. Shank type Long type

WEX 3000 E/ES/EL/E-C/ES-C type



Rake Angle	Radial	8° to 15°
	Axial	16° to 24°

14mm 90°

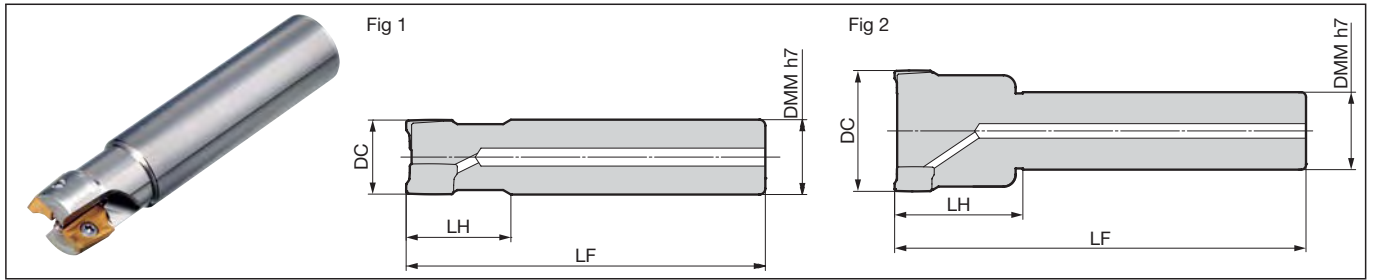

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEX 3025E-20	●	25	20	35	120	2	0.25	2
3025E	●	25	25	35	120	2	0.37	1
3028E	●	28	25	35	120	2	0.39	2
3030E	●	30	25	40	130	3	0.42	2
3032E-25	●	32	25	40	130	3	0.43	2
3032E	●	32	32	40	130	3	0.67	1
3035E	●	35	32	40	130	3	0.69	2
3040E	●	40	32	50	170	4	1.01	2
3050E	●	50	32	50	170	5	1.23	2
3063E	●	63	32	50	170	6	1.58	2

Body (Short Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEX 3050ES	●	50	32	25	135	5	0.86	2
3050ES-42	●	50	42	25	135	5	1.36	2
3063ES	●	63	32	25	135	6	1.02	2
3063ES-42	●	63	42	25	135	6	1.52	2

Inserts are sold separately.

Body (Long Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEX 3025EL	●	25	25	50	170	2	0.54	1
3028EL	●	28	25	50	170	2	0.56	2
3030EL	●	30	25	60	180	2	0.60	2
3032EL	●	32	32	60	180	2	0.95	1
3035EL	●	35	32	60	180	2	0.98	2
3040EL	●	40	32	80	220	2	1.38	2

Body (Coarse Pitch type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEX 3040E-C	●	40	32	50	170	3	1.04	2
3050E-C	●	50	32	50	170	3	1.28	2
3063E-C	●	63	32	50	170	4	1.64	2

Body (Short Coarse Pitch type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WEX 3050ES-C	●	50	32	25	135	3	0.91	2
3050ES-C-42	●	50	42	25	135	3	1.41	2
3063ES-C	●	63	32	25	135	4	1.07	2
3063ES-C-42	●	63	42	25	135	4	1.57	2

Inserts are sold separately.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide						Carbide	DLC	Corner Radius RE	Fig	
	Process						H1	DL1000			
	High-speed/Light Cutting	General-purpose		Roughing							
	P	M	K	N	S		N				
		M	K	N	S		N				
		M	K	N	S		N				
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Corner Radius RE	Fig
AXMT 170508PEER-L	●	●	●	●	●	—	—	—	—	0.8	1
AXMT 170504PEER-G	●	●	●	●	●	—	—	—	—	0.4	1
170508PEER-G	●	●	●	●	●	—	—	—	—	0.8	1
170512PEER-G	●	●	●	●	●	—	—	—	—	1.2	1
170516PEER-G	●	●	●	●	●	—	—	—	—	1.6	1
170520PEER-G*	●	●	●	●	●	—	—	—	—	2.0	1
170530PEER-G*	●	●	●	●	●	—	—	—	—	3.0	1
AXMT 170508PEER-H	●	●	●	●	●	—	—	—	—	0.8	1
170512PEER-H	●	●	●	●	●	—	—	—	—	1.2	1
AXMT 170504PEER-E	—	—	—	—	—	●	●	—	—	0.4	1
170508PEER-E	—	—	—	—	—	●	●	—	—	0.8	1
170512PEER-E	—	—	—	—	—	●	●	—	—	1.2	1
170516PEER-E	—	—	—	—	—	●	●	—	—	1.6	1
170520PEER-E*	—	—	—	—	—	●	●	—	—	2.0	1
170530PEER-E*	—	—	—	—	—	●	●	—	—	3.0	1
AXMT 170508PEER-EH	—	—	—	—	—	●	●	—	—	0.8	1
AXET 170502PEFR-S	—	—	—	—	—	—	—	●	●	0.2	1
170504PEFR-S	—	—	—	—	—	—	—	●	●	0.4	1
170508PEFR-S	—	—	—	—	—	—	—	●	●	0.8	1

-L: Low Cutting force, -G: General-purpose, -H: Strong Edge, -E, -EH: Exotic Alloy, -S: Aluminum Alloy.

* marked inserts require modification of the cutter body.

Recommended Cutting Conditions H89

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
WEX3025E(EL) to 3030EL	BFTX0407IP	3.0	TRDR15IP SUMI-P
WEX3032E(EL) to 3063E(ES)	BFTX0409IP	3.0	TRDR15IP SUMI-P

***Modification of the cutter body is required when using inserts with corner radius RE 2.0 or 3.0**



Modify this portion.

Reworking guidelines

For Corner Radius RE 2.0: C1 (AXMT170520PEER)

For Corner Radius RE 3.0: C1.5 (AXMT170530PEER)

Standard: C0.5.

High-efficiency Shoulder Milling of Deep Steps




■ Features

Inserts for SEC-WaveMill WEX series, with wave-like cutting edges, are arranged in multiple stages forming a long cutting edge to enable high-efficiency shoulder milling of deep steps.


- Cutting edge positions are optimised to provide low cutting force and low vibration.

■ Comparison of Cutting Force

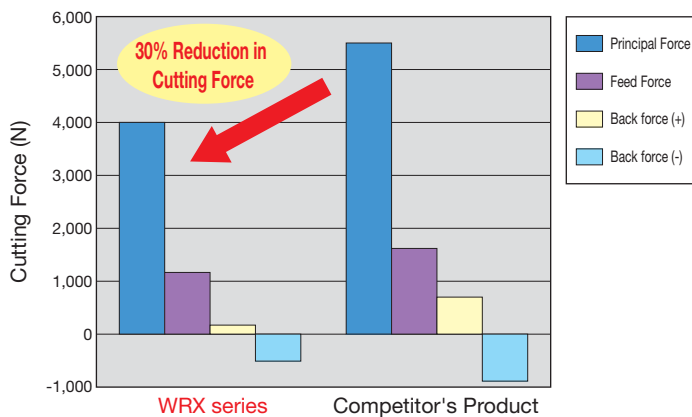



Cutting Conditions
 Work Material : S50C
 Tool : WRX2025E2725
 Cutting Speed : $vc = 100\text{m/min}$, $fz = 0.15\text{mm/t}$, $ae = 10\text{mm}$, $ap = 25\text{mm}$, Dry

■ Comparison of Vibration

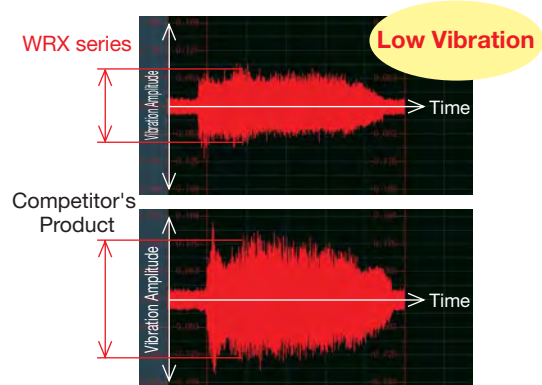

Cutting Conditions
 Work Material : S50C
 Tool : WRX3080RS5332
 Cutting Speed : $vc = 150\text{m/min}$, $fz = 0.20\text{mm/t}$, $ae = 5\text{mm}$, $ap = 40\text{mm}$, Dry

- Lead groove and special pocket shape provide smooth chip evacuation and high body rigidity
- Tip insert supporting face reduces bottom edge fracture and provides high reliability.

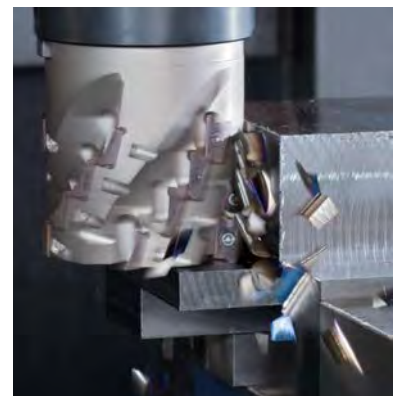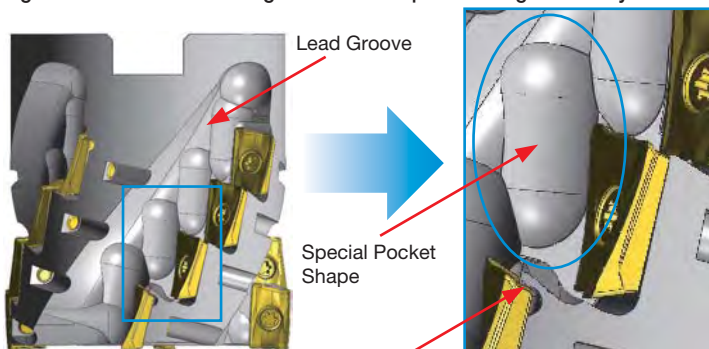


■ Product Range

Cutting Edge	Series Code	Cutting Edge Length (mm)	Dia. (mm)	Shape	Applicable Inserts (*)
Standard type	WRX2000E	27 to 36	ø20 to ø40	Shank type	AXMT1235 type
	WRX2000R	36	ø40 to ø50	Mounting Hole type	
	WRX3000E	40 to 53	ø40 to ø50	Shank type	AXMT1705 type
	WRX3000R	53	ø50 to ø100	Mounting Hole type	
Short Cutting Edge type	WRX2000E	18	ø20 to ø40	Shank type	AXMT1235 type
	WRX2000R		ø40 to ø50	Mounting Hole type	
	WRX3000E	27	ø40 to ø50	Shank type	AXMT1705 type
	WRX3000R		ø50 to ø100	Mounting Hole type	

Short Cutting Edge Series

2-stepped Cutting Edge Design
Reduces Number of Passes

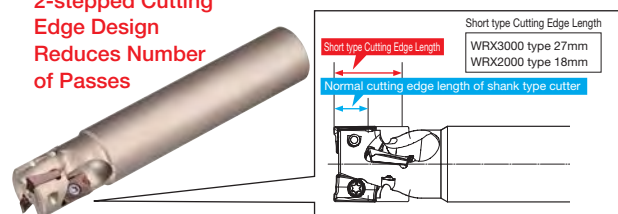


* Applicable inserts are common with the popular WEX type SEC-WaveMill

WRX 2000RS type



Rake Angle	Radial	16° to 17°
	Axial	24°

18 to 36mm **90°**

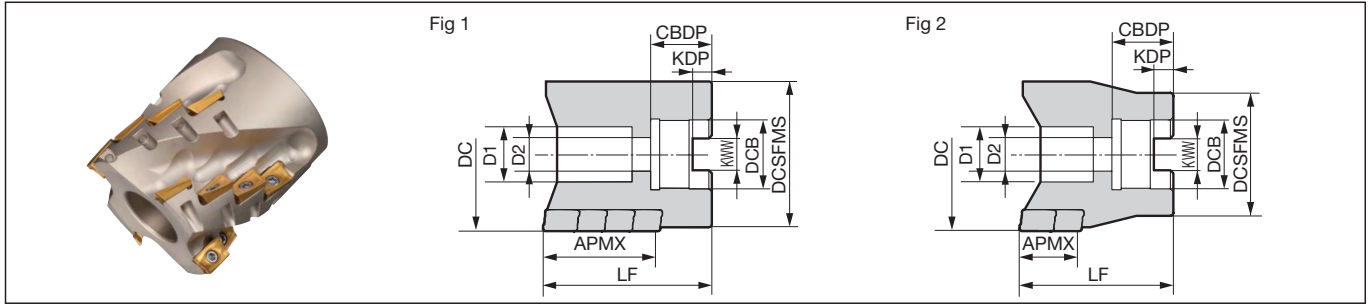

Body (Standard type)

Dimensions (mm)

Metric	Cat. No.		Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
		WRX 2040RS3616	2050RS3622	●	40	36	37.5	55	16	8.4	5.6	18	14	9	16	4	4	0.3
			●	50	36	47.5	55	22	10.4	6.3	20	18	11	16	4	4	0.5	1

Body (Short Cutting Edge type)

Dimensions (mm)

Metric	Cat. No.		Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
		WRX 2040RS1816	2050RS1822	●	40	18	32	50	16	8.4	5.6	18	14	9	10	2	5	0.3
			●	50	18	40	50	22	10.4	6.3	20	18	11	10	2	5	0.4	2


Inserts are sold separately.

Insert

Dimensions (mm)

Process	Grade Classification		Coated Carbide						Carbide	DLC	Corner Radius RE	Fig
	High-speed/Light Cutting		P	M	K	S	N	H	N			
	General-purpose		P	M	K	S	N	H	N			
		Roughing			K <td>S <td>N <td>H <td></td> </td></td></td>	S <td>N <td>H <td></td> </td></td>	N <td>H <td></td> </td>	H <td></td>				
Cat. No.		ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000		
AXMT 123504PEER-G	●	●	●	●	●	—	—	—	—	0.4	1	
123508PEER-G	●	●	●	●	●	—	—	—	—	0.8	1	
123512PEER-G	●	●	●	●	●	—	—	—	—	1.2	1	
AXMT 123504PEER-H	●	●	●	●	●	—	—	—	—	0.4	1	
123508PEER-H	●	●	●	●	●	—	—	—	—	0.8	1	
123512PEER-H	●	●	●	●	●	—	—	—	—	1.2	1	
AXMT 123504PEER-E	—	—	—	—	—	●	●	—	—	0.4	1	
123508PEER-E	—	—	—	—	—	●	●	—	—	0.8	1	
123512PEER-E	—	—	—	—	—	●	●	—	—	1.2	1	
AXMT 123508PEER-EH	—	—	—	—	—	●	●	—	—	0.8	1	
AXET 123502PEFR-S	—	—	—	—	—	—	—	●	●	0.2	1	
123504PEFR-S	—	—	—	—	—	—	—	●	●	0.4	1	
123508PEFR-S	—	—	—	—	—	—	—	●	●	0.8	1	

Fig 1

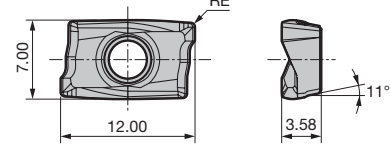

-G: General-purpose, -H: Strong Edge, -E, -EH: Exotic Alloy, -S: Aluminum Alloy.

Recommended Cutting Conditions **H97**

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	2.0	TRDR08IP SUMI-P

* Use peripheral inserts with RE of 0.8mm or less from the second step and above.

Identification Code

WRX 2 040 R S 36 16

Series Code Insert Size Dia. Feed Metric Cutting Edge Mounting Hole

Direction Bore Length Diameter

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed

WRX 3000R(S) type



Rake Angle	Radial	13° to 15°	27 to 53 mm	90°	
	Axial	22° to 24°			

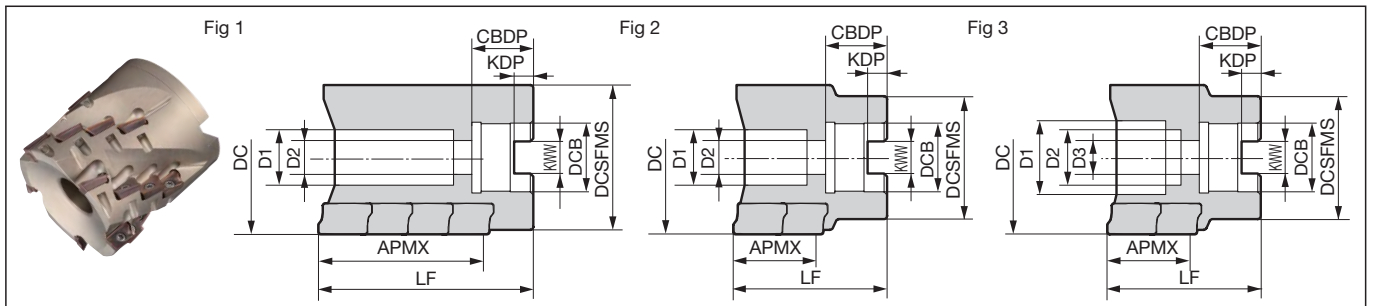

Body (Standard type)

Cat. No.		Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Bolt D3	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
Metric	WRX 3050RS5322	●	50	53	47	70	22	10.4	6.3	20	18	11	—	12	4	3	0.6	1
	3063RS5327	●	63	53	60	70	27	12.4	7	23	20	13.5	—	16	4	4	1.0	1
	3080RS5332	●	80	53	77	85	32	14.4	8	26	25	17	—	20	4	5	2.2	1
	3100RS5340	●	100	53	97	85	40	16.4	9.5	30	32	21	—	24	4	6	3.5	1

Body (Short Cutting Edge type)

Cat. No.		Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Bolt D3	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
Metric	WRX 3050RS2722	●	50	27	40	50	22	10.4	6.3	20	18	11	—	8	2	4	0.4	2
	3063RS2722	●	63	27	50	50	22	10.4	6.3	20	18	11	—	10	2	5	0.7	2

Body (Short Cutting Edge type)

Cat. No.		Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Bolt D3	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
Inch	WRX 3080R27254	●	80	27	60	50	25.4	9.5	6	25	35	26	13	12	2	6	1.1	3
	3100R27317	●	100	27	70	63	31.75	12.7	8	32.5	46	28	17	14	2	7	2.0	3

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide					Carbide	DLC	Dimensions (mm)		
Process	High-speed/Light Cutting	P		K		M/S	K/N	N	Corner Radius RE	Fig	
	General-purpose	P/M	P/M	K		M/S		N			
	Roughing	P/M	P/M	K		M/S					
Cat. No.		ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	
AXMT 170508PEER-L		●	●	●	●	●	—	—	—	0.8	1
AXMT 170504PEER-G		●	●	●	●	●	—	—	—	0.4	1
170508PEER-G		●	●	●	●	●	—	—	—	0.8	1
170512PEER-G		●	●	●	●	●	—	—	—	1.2	1
170516PEER-G		●	●	●	●	●	—	—	—	1.6	1
170520PEER-G*		●	●	●	●	●	—	—	—	2.0	1
170530PEER-G*		●	●	●	●	●	—	—	—	3.0	1
AXMT 170508PEER-H		●	●	●	●	●	—	—	—	0.8	1
170512PEER-H		●	●	●	●	●	—	—	—	1.2	1
AXMT 170504PEER-E		—	—	—	—	●	●	—	—	0.4	1
170508PEER-E		—	—	—	—	●	●	—	—	0.8	1
170512PEER-E		—	—	—	—	●	●	—	—	1.2	1
170516PEER-E		—	—	—	—	●	●	—	—	1.6	1
170520PEER-E*		—	—	—	—	●	●	—	—	2.0	1
170530PEER-E*		—	—	—	—	●	●	—	—	3.0	1
AXMT 170508PEER-EH		—	—	—	—	●	●	—	—	0.8	1
AXET 170502PEFR-S		—	—	—	—	—	●	●	●	0.2	1
170504PEFR-S		—	—	—	—	—	●	●	●	0.4	1
170508PEFR-S		—	—	—	—	—	●	●	●	0.8	1

* marked inserts require modification of the cutter body.

Recommended Cutting Conditions H97

Parts

Flat Insert Screw	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit	
BFTX0409IP	3.0 HPS1015	TRB15IP	SUMI-P

* Use peripheral inserts with RE of 0.8mm or less from the second step and above.

***Modification of the cutter body is required when using inserts with corner radius RE 2.0 or 3.0**

Modify this portion.
Reworking guidelines
For RE = 2.0: C1 (AXMT170520PEER)
For RE = 3.0: C1.5 (AXMT170530PEER)


Standard: C0.5.

Recommended Tightening Torque (N-m)

WRX 2000E type



Rake Angle	Radial 13° to 16° Axial 16° to 24°	18 to 36 mm 90°			
------------	---------------------------------------	--------------------	--	--	--

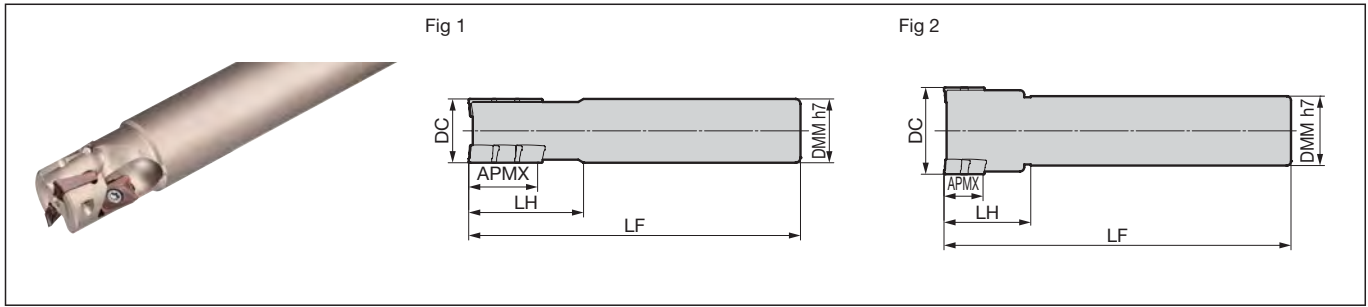

Body (Shank type)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
WRX 2020E3620	●	20	36	20	45	130	4	4	1	0.3	1
2025E2725	●	25	27	25	45	130	6	3	2	0.4	1
2032E2732	●	32	27	32	45	130	9	3	3	0.7	1
2040E3642	●	40	36	42	45	130	16	4	4	1.2	1

Body (Short Cutting Edge type)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
WRX 2020E1820	●	20	18	20	40	120	4	2	2	0.3	1
2025E1825	●	25	18	25	45	130	6	2	3	0.4	1
2032E1832	●	32	18	32	50	140	8	2	4	0.8	1
2040E1832	●	40	18	32	40	160	10	2	5	1.1	2

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide						Carbide	DLC	Dimensions (mm)	
	High-speed/Light Cutting						H1	DL1000	Corner Radius RE	Fig
	General-purpose									
Process	Roughing									
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300			
AXMT 123504PEER-G	●	●	●	●	●	—	—	—	0.4	1
123508PEER-G	●	●	●	●	●	—	—	—	0.8	1
123512PEER-G	●	●	●	●	●	—	—	—	1.2	1
AXMT 123504PEER-H	●	●	●	●	●	—	—	—	0.4	1
123508PEER-H	●	●	●	●	●	—	—	—	0.8	1
123512PEER-H	●	●	●	●	●	—	—	—	1.2	1
AXMT 123504PEER-E	—	—	—	—	—	●	●	—	0.4	1
123508PEER-E	—	—	—	—	—	●	●	—	0.8	1
123512PEER-E	—	—	—	—	—	●	●	—	1.2	1
AXMT 123508PEER-EH	—	—	—	—	—	●	●	—	0.8	1
AXET 123502PEFR-S	—	—	—	—	—	—	—	●	0.2	1
123504PEFR-S	—	—	—	—	—	—	—	●	0.4	1
123508PEFR-S	—	—	—	—	—	—	—	●	0.8	1

-G: General-purpose, -H: Strong Edge, -E, -EH: Exotic Alloy, -S: Aluminum Alloy.

Recommended Cutting Conditions H97

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	2.0	TRDR08IP SUMI-P

* Use peripheral inserts with RE of 0.8mm or less from the second step and above.

Identification Code


WRX 2 020 E 36 20

Series Code Insert Size Dia. Shank type Cutting Edge Length Shank Dia.

WRX 3000E type



Rake Angle	Radial Axial	12° to 13° 20° to 22°	27 to 53 mm 90°			
------------	-----------------	--------------------------	--------------------	--	--	--

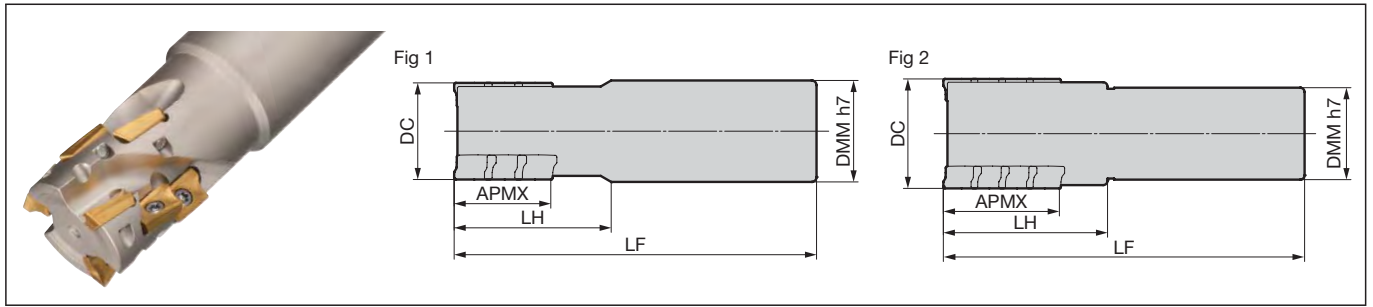

Body (Shank type)

Cat. No.	Stock	Dimensions (mm)									
		Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
WRX 3040E4042	●	40	40	42	65	150	9	3	3	1.3	1
3050E5342	●	50	53	42	75	165	12	4	3	1.8	2

Body (Short Cutting Edge type)


Cat. No.	Stock	Dimensions (mm)									
		Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	No. of Steps	Effective No. of Teeth	Weight (kg)	Fig
WRX 3040E2732	●	40	27	32	60	180	6	2	3	1.2	2
3050E2732	●	50	27	32	60	180	8	2	4	1.4	2

Inserts are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide						Carbide	DLC	Dimensions (mm)		
	P	M	K	N	S	H	N	Corner Radius RE	Fig		
High-speed/Light Cutting	P		K				N				
General-purpose	P	M	K	N	S		N				
Roughing	P	M	K	N	S		N				
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	ACM200	ACM300	H1	DL1000	Corner Radius RE	Fig
AXMT 170508PEER-L	●	●	●	●	●	—	—	—	—	0.8	1
AXMT 170504PEER-G	●	●	●	●	●	—	—	—	—	0.4	1
170508PEER-G	●	●	●	●	●	—	—	—	—	0.8	1
170512PEER-G	●	●	●	●	●	—	—	—	—	1.2	1
170516PEER-G	●	●	●	●	●	—	—	—	—	1.6	1
170520PEER-G*	●	●	●	●	●	—	—	—	—	2.0	1
170530PEER-G*	●	●	●	●	●	—	—	—	—	3.0	1
AXMT 170508PEER-H	●	●	●	●	●	—	—	—	—	0.8	1
170512PEER-H	●	●	●	●	●	—	—	—	—	1.2	1
AXMT 170504PEER-E	—	—	—	—	—	●	●	—	—	0.4	1
170508PEER-E	—	—	—	—	—	●	●	—	—	0.8	1
170512PEER-E	—	—	—	—	—	●	●	—	—	1.2	1
170516PEER-E	—	—	—	—	—	●	●	—	—	1.6	1
170520PEER-E*	—	—	—	—	—	●	●	—	—	2.0	1
170530PEER-E*	—	—	—	—	—	●	●	—	—	3.0	1
AXMT 170508PEER-EH	—	—	—	—	—	●	●	—	—	0.8	1
AXET 170502PEFR-S	—	—	—	—	—	—	—	●	●	0.2	1
170504PEFR-S	—	—	—	—	—	—	—	●	●	0.4	1
170508PEFR-S	—	—	—	—	—	—	—	●	●	0.8	1

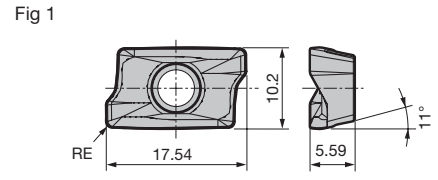

* marked inserts require modification of the cutter body.

Recommended Cutting Conditions H97

Identification Code

WRX 3 040 E 40 42

Series Code Insert Size Dia. Shank type Cutting Edge Length Shank Dia.

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0409IP	3.0 TRDR15IP	SUMI-P

* Use peripheral inserts with RE of 0.8mm or less from the second step and above.

***Modification of the cutter body is required when using inserts with corner radius RE 2.0 or 3.0**



Modify this portion.
Reworking guidelines
For RE = 2.0: C1 (AXMT170520PEER)
For RE = 3.0: C1.5 (AXMT170530PEER)

Standard: C0.5.

New



■ Features


- Ideal for machining titanium alloys for aerospace
Designed for machining at large ramping angles, coupled with a selection of corner radiuses, makes it applicable for a variety of applications including titanium structural parts
- Stable and long tool life in machining titanium alloys
The optimised cutting edge shape together with newly developed ACS2500/ACS3000 grades (for machining exotic alloys) result in excellent wear resistance and fracture resistance
- Optimized cutting edge shape and chip pocket for excellent chip evacuation

■ Product Range

Type	Description	Cat. No.	Dia. (mm)		
			ø32	ø50	ø63
Shell	Standard	WSE 16000RS○○		5	6
	Long	WSE 16000RS○○L		5	6
Shank	Standard	WSE 16000E○○	3		


Number in ● shows the number of teeth

■ Applicable to various applications!

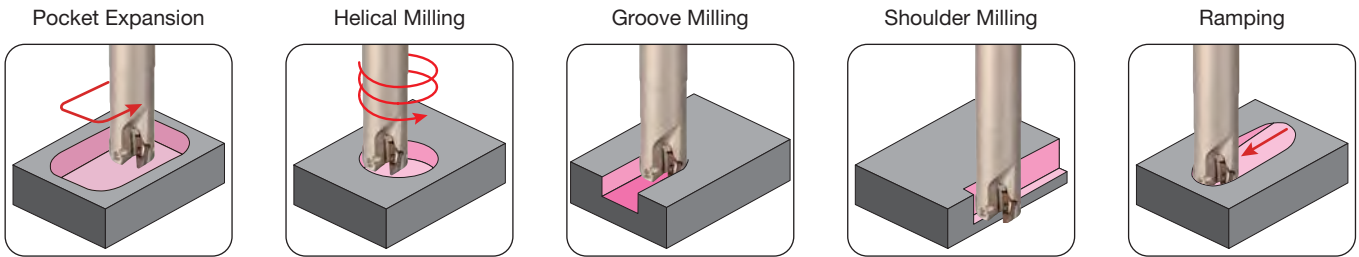


■ Ramping/Helical Milling Upper Limit

Ramping

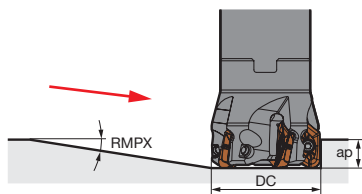


Helical Milling



Dia. DC ø (mm)	Corner Radius RE	Max. Ramping Angle RMPX(°)
32	RE ≥ 5.0	8.4
	RE ≤ 4.0	12.2
50	RE ≥ 5.0	3.6
	RE ≤ 4.0	5.6
63	RE ≥ 5.0	2.5
	RE ≤ 4.0	3.9

Dia. DC ø (mm)	Corner Radius RE	Max. Machining Dia. ø (mm)	Max. Pitch (mm/rev)	Standard Diameter ø (mm)	Max. Pitch (mm/rev)	Min. Machining Dia. ø (mm)	Max. Pitch (mm/rev)
32	4.0	55.3	13.0	55.2	13.0	45.9	3.0
	0.8	61.3	13.0	56.3	13.0	45.9	2.9
50	4.0	91.6	11.2	91.6	11.2	81.9	2.8
	0.8	97.3	13.0	92.2	11.0	81.9	2.7
63	4.0	117.6	10.1	117.6	10.1	107.9	2.7
	0.8	123.3	11.7	118.2	9.9	107.9	2.6

Precautions for Helical Milling

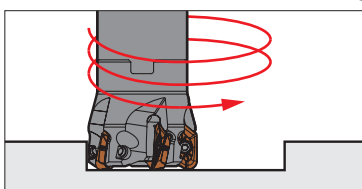

Helical Milling

- For helical milling, if the work diameter is smaller than the standard diameter, there will be a centre uncut portion.
- A prepared centre hole should be made.
- Above the standard diameter, this portion can be removed by traverse cutting with the same cutter.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling



Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals





Cast Iron, High-Speed

■ Grade Features





Work Material	Grade	Coating Thickness (µm)	Features
	ACS2500	3	Carbide substrate with excellent wear and adhesion resistance, coupled with a chipping resistant coating, provide outstanding performance especially in machining titanium alloys
	ACS3000	3	High toughness carbide substrate and a coating with excellent chipping resistance provide outstanding stability when machining titanium alloys, heat-resistant alloys or stainless steel

■ Grade Application Range









The newly developed **ACS2500/ACS3000** grades ideal for machining titanium alloys, heat-resistant alloys and stainless steel are now available!

Work Material		Finishing to Light Cutting	Medium Cutting	Rough to Heavy Cutting	
 	Coated Carbide	ACS2500			
				ACS3000	
 	Coated Carbide			ACS3000	

■ Chipbreaker Shape

Work Material	 Stainless Steel,  Exotic Alloy
Applications	General-purpose to Roughing
Features	Standard
Chipbreaker	E type
	
Cutting Edge Cross Section	

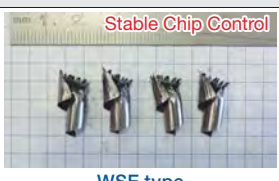
■ Excellent Chip Control

Cutting Conditions	Chip	
vc = 60m/min fz = 0.12mm/t ap = 10mm ae = 21mm Wet (7MPa) Ramping Angle: 0° 	 Stable Chip Control WSE type	 Unstable Chips Competitor's Product
vc = 50m/min fz = 0.12mm/t ap = 4mm ae = 50mm Wet (7MPa) Ramping Angle: 3° 	 Stable Chip Control WSE type	 Unstable Chips Competitor's Product
vc = 50m/min fz = 0.12mm/t ap = 4mm ae = 50mm Wet (7MPa) Ramping Angle: 5.5° 	 Stable Chip Control WSE type	X Machining Not Possible Competitor's Product

Machine: 5-axis Machine HSK100, Work Material: Ti-6Al-4V
 Tool: WSE 16050RS05L (ø50, 5-tooth)
 Insert: XOMT160540PEER-E (ACS3000)

New PVD Coating Layer Features

ABSOTECH
PVD

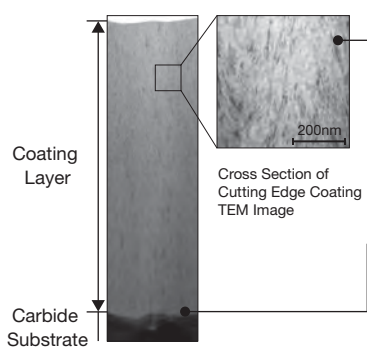

Ultra-fine Grained B Additive

- New AlTiBN coating, with an ultra-fine coating structure, achieves high strength and toughness
- Outstanding chipping resistance and wear resistance

High Adhesion Strength

Significantly improved coating adhesion and more than 2x conventional chipping resistance

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters

T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

WSE 16000RS type



New


Rake Angle	Radial	-9° to -6°
	Axial	8° to 14°

15mm 90°



Milling Cutters

H

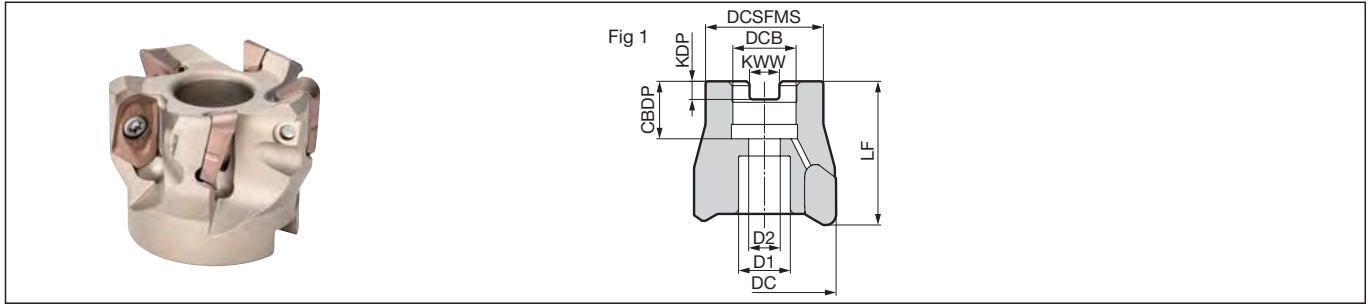

Body (Shell type)

Dimensions (mm)

Metric	Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
		WSE 16050RS05	●	50	41	40(38.5)	22	10.4	6.3	20	18	11	5	0.24
	16050RS05L	●	50	41	50(48.5)	22	10.4	6.3	20	18	11	5	0.33	1
	16063RS06	●	63	50	40(38.5)	22	10.4	6.3	20	18	11	6	0.46	1
	16063RS06L	●	63	50	50(48.5)	22	10.4	6.3	20	18	11	6	0.61	1

The LF dimensions in parentheses are dimensions using RE = 5.0 or larger insert. When using RE = 5.0 or larger inserts, the maximum depth of cut is 13mm. Take note of the cutter mounting size (DCB) when selecting a cutter. Inserts are sold separately.

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Identification Code

WSE 16 050 R S 05 L

Series Code Insert Size Dia. Feed Direction Metric Bore Number of Teeth Long Body

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Parts


Flat Insert Screw		Detachable Wrench		Anti-seizure Cream
		Handle Grip	Bit	
BFTX0409IP	3.0	HPS1015	TRB15IP	SUMI-P

New

Insert



Dimensions (mm)

Process	Grade Classification		Coated Carbide		Corner Radius RE	Fig
	High-speed/Light Cutting	Medium Cutting	M S	M S		
		Roughing	M S	M S		
			ACS2500	ACS3000		
	Cat. No.					
	XOMT 160508PEER-E	●	●		0.8	1
	160512PEER-E	●	●		1.2	1
	160516PEER-E	●	●		1.6	1
	160520PEER-E	●	●		2	1
	160530PEER-E	●	●		3	1
	160540PEER-E	●	●		4	1
	160550PEER-E	●	●		5	2
	160560PEER-E	●	●		6	2
	160564PEER-E	●	●		6.35	2

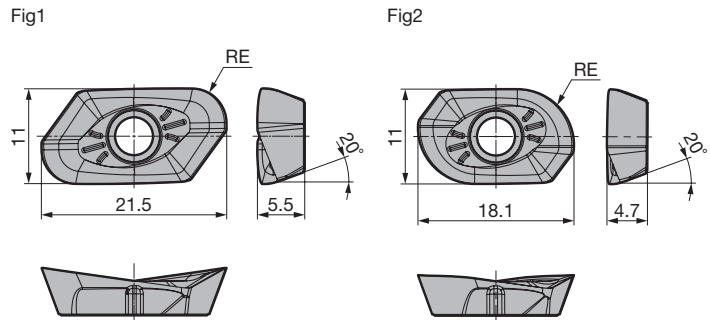


Precautions for Mounting Inserts

- (1) Clean the mounting seat surface and contact parts.
- (2) While pressing the insert firmly against the seat surface, tighten the screws with the included wrench.
- (3) Apply Anti-seizure Cream to the screws and tighten at the recommended torque.
- (4) After tightening, check that there are no gaps on the seat surface.

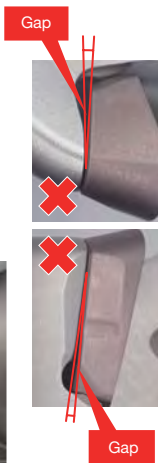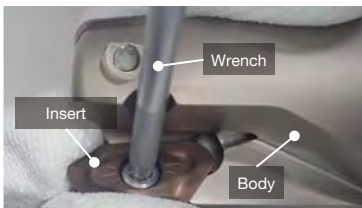

***Modification of the cutter body is required when using inserts with corner radius RE 5.0 or larger.**

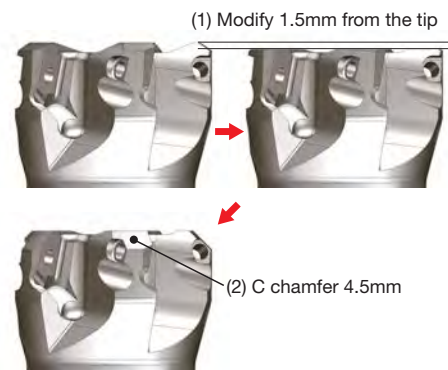

Recommended Cutting Conditions

ISO	Work Material		Hardness	Chipbreaker	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Grade
S	Exotic Alloy	Heat-Resistant Alloy	—	E	25 - 35 - 50	0.05 - 0.10 - 0.15	ACS2500/ACS3000
		Ti Alloy	—	E	30 - 60 - 90	0.05 - 0.10 - 0.15	ACS2500/ACS3000
M	Stainless Steel	SUS430 and Others (Martensitic/Ferritic)	200	E	115 - 145 - 175	0.05 - 0.10 - 0.15	ACS2500/ACS3000
		SUS403 and Others (Martensitic/Hardened)	240	E	105 - 130 - 155	0.05 - 0.10 - 0.15	ACS2500/ACS3000
		SUS304, SUS316 (Austenitic)	180	E	125 - 155 - 190	0.05 - 0.10 - 0.15	ACS2500/ACS3000

- The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, work material shape, clamping system).
- For groove milling, adjust the feed rate to around 70% of the above values.

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


WSE 16000E type



New

Rake Angle	Radial	-9°
	Axial	8°

15mm 90°



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

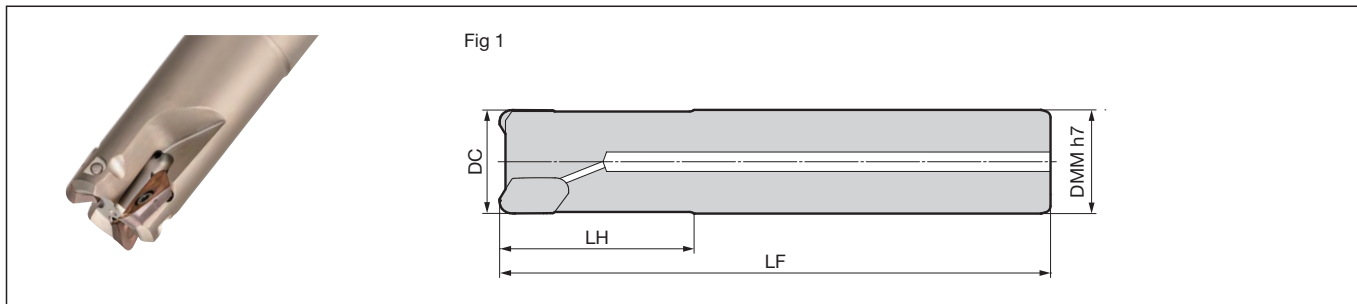

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WSE 16032E03	●	32	32	60(58.4)	170(168.4)	3	0.9	1

The LH and LF dimensions in parentheses are dimensions using RE = 5.0 or larger insert. When using RE = 5.0 or larger inserts, the maximum depth of cut is 13mm. Inserts are sold separately.

Identification Code

WSE 16 032 E 03

Series Code Insert Size Dia. Shank type Number of Teeth

Parts


Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0409IP	3.0	TRDR15IP SUMI-P

New

Insert



Dimensions (mm)

Process	Grade Classification		Coated Carbide		Corner Radius RE	Fig
	High-speed/Light Cutting	Medium Cutting	M S	M S		
		Roughing				
			ACS2500	ACS3000		
	Cat. No.					
	XOMT 160508PEER-E	●	●		0.8	1
	160512PEER-E	●	●		1.2	1
	160516PEER-E	●	●		1.6	1
	160520PEER-E	●	●		2	1
	160530PEER-E	●	●		3	1
	160540PEER-E	●	●		4	1
	160550PEER-E	●	●		5	2
	160560PEER-E	●	●		6	2
	160564PEER-E	●	●		6.35	2

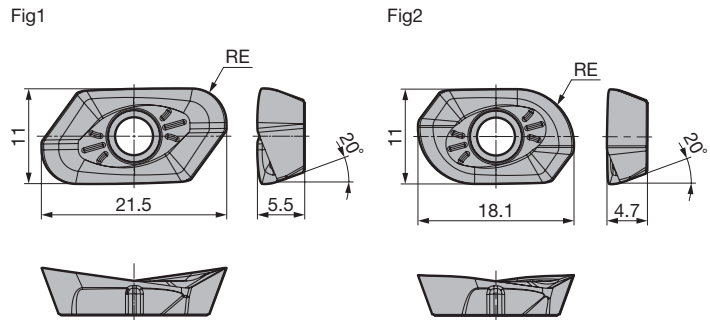


Precautions for Mounting Inserts

- (1) Clean the mounting seat surface and contact parts.
- (2) While pressing the insert firmly against the seat surface, tighten the screws with the included wrench.
- (3) Apply Anti-seizure Cream to the screws and tighten at the recommended torque.
- (4) After tightening, check that there are no gaps on the seat surface.

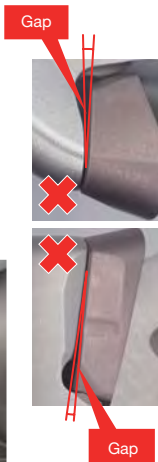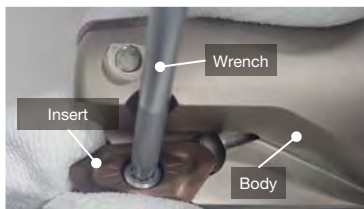

***Modification of the cutter body is required when using inserts with corner radius RE 5.0 or larger.**

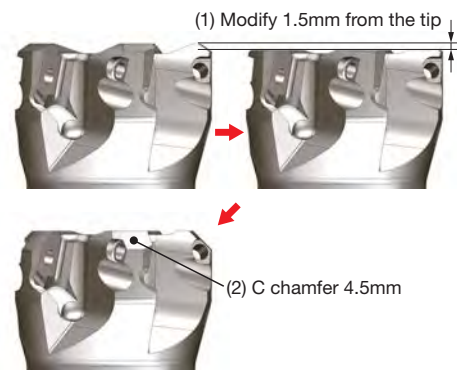

Recommended Cutting Conditions

ISO	Work Material		Hardness	Chipbreaker	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Grade
S	Exotic Alloy	Heat-Resistant Alloy	—	E	25 - 35 - 50	0.05 - 0.10 - 0.15	ACS2500/ACS3000
		Ti Alloy	—	E	30 - 60 - 90	0.05 - 0.10 - 0.15	ACS2500/ACS3000
M	Stainless Steel	SUS430 and Others (Martensitic/Ferritic)	200	E	115 - 145 - 175	0.05 - 0.10 - 0.15	ACS2500/ACS3000
		SUS403 and Others (Martensitic/Hardened)	240	E	105 - 130 - 155	0.05 - 0.10 - 0.15	ACS2500/ACS3000
		SUS304, SUS316 (Austenitic)	180	E	125 - 155 - 190	0.05 - 0.10 - 0.15	ACS2500/ACS3000

- The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, work material shape, clamping system).
- For groove milling, adjust the feed rate to around 70% of the above values.

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



■ Features

SEC-WaveMill WFX type for shoulder milling is a screw-lock type cutter capable of using four corners.

Ideal cutting edge design delivers good squareness.


Now with high-efficiency, multi-functional WFXH type and chamfering WFXC type, our comprehensive range covers a wide variety of applications.

In addition to the general-purpose grade ACU2500, applicable to various work materials, the new-generation coated carbide grades XCU2500/XCK2000 are now available. Covering a wide variety of machining.





WFXH type WFXC type

The insert shape optimised for shoulder milling and the high-precision body leave a superior machined surface finish.

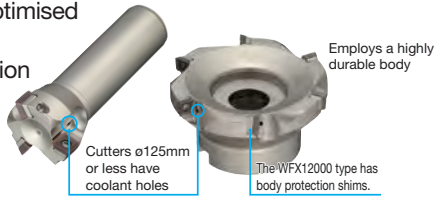

● Optimised Edge Shape (For Shoulder Milling)



- (1): The convex shape ensures cutting edge strength
- (2): The flat shape reduces step differences in shoulder milling
- (3): The wiper edge function improves the surface roughness

■ Product Range


Applications	Type	Cat. No.	Description	Dia. (mm)																Shape		
				ø8	ø16	ø20	ø22	ø25	ø28	ø30	ø32	ø33	ø40	ø50	ø63	ø80	ø100	ø125	ø160		ø200	ø250
Shoulder Milling	Shell	WFX 08000R	Standard Pitch												6	8						
		WFX 08000RS	Standard Pitch								3	4	5	6	8							
		WFXM 08000R	Fine Pitch												8	10						
		WFXM 08000RS	Fine Pitch									4	5	6	8	10						
		WFXF 08000R	Extra Fine Pitch												10	12						
	Shank	WFX 12000R	Standard Pitch												4	5	6	8	10	12		
		WFX 12000RS	Standard Pitch												3	4	4	5				
		WFXF 12000R	Extra Fine Pitch													6	7	8	12	16		18
		WFXF 12000RS	Extra Fine Pitch													4	5	6	7			
		WFX 08000E	Standard Pitch		2*	2	2*	2	3	3	3	3	4	5								
High Efficiency	Shell	WFXH 08000RS	Standard Pitch											4	5	6	6					
		WFXH 12000RS	Standard Pitch												4	5						
	Modular	WFXH 08000M	Modular type			2	2	2	2	3	3			3								
		WFXH 12000M	Modular type												3							
Chamfering	Shank	WFXC 08000E	Standard Pitch	1	2																	
		WFXC 12000E	Standard Pitch					3		3												
	Modular	WFXC 08000M	Modular type		2																	
		WFXC 12000M	Modular type					3		3												

■ Chipbreaker Selection

Number in ●●● shows the number of teeth Inch Bore *mark: Different diameter shanks in stock Modular type H266


Work Material	P M K S				N
Applications	Light Cutting, Low Rigidity Milling and Reduction of Burrs	Main Chipbreaker General-purpose to Interrupted Milling	Roughing, Heavy Interrupted Cutting and Hardened Steel Milling	High-precision Finish	Non-Ferrous Metals
Features	Low Cutting Force	General-purpose type	High Strength type	Wiper	Sharp Edge
Chipbreaker	L type	G type	H type	Wiper Insert	S type
08 type Cross Section					
12 type Cross Section					

■ Chipbreaker Selection Guide




■ Cutting Performance


(1) Shoulder Milling Precision

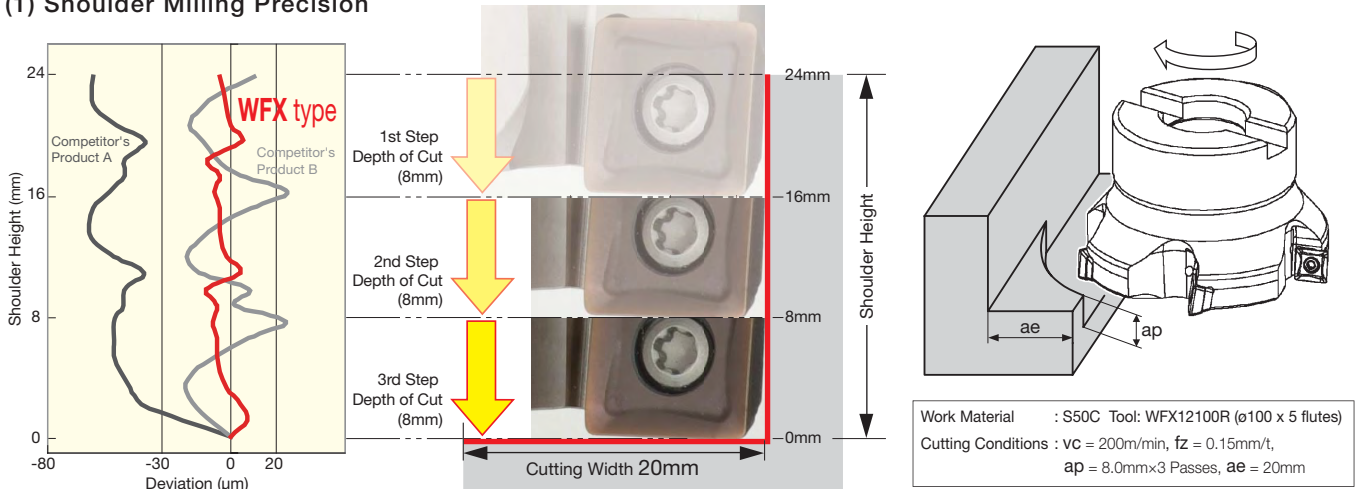


(2) Comparison of Surface Roughness

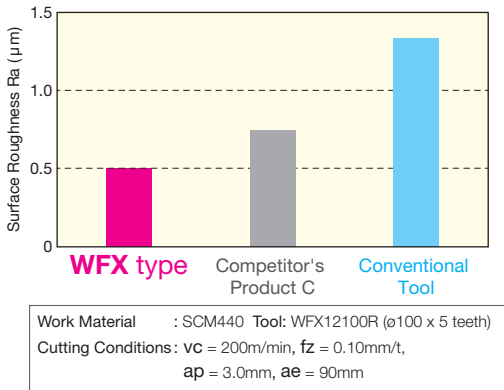


(3) Comparison of Surface Properties

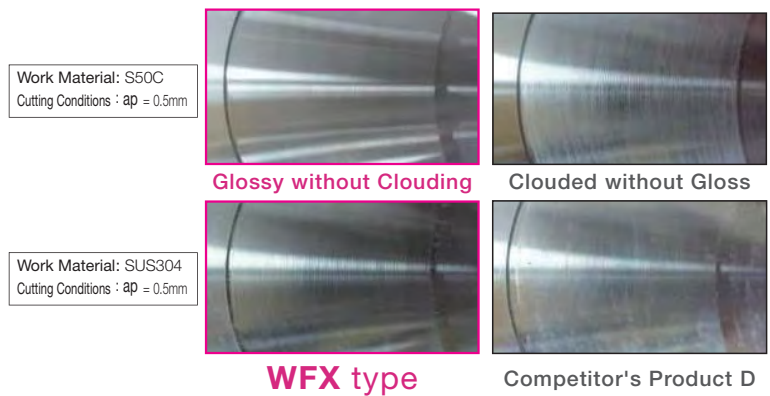

(4) Comparison of Cutting Force


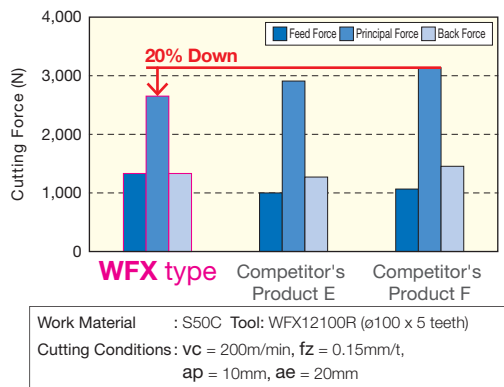


(5) Comparison of Wear Resistance

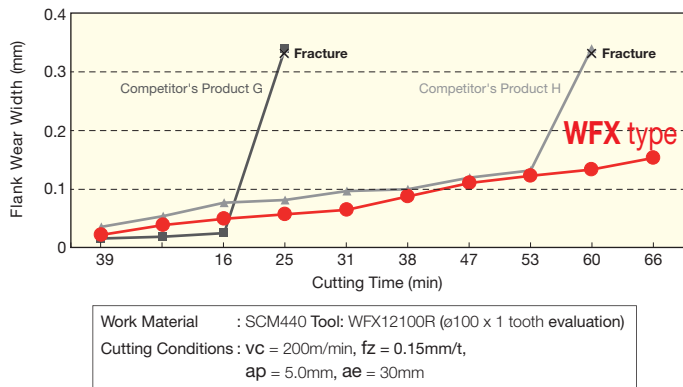

■ Wiper Insert



Optimised wiper edge shape provides superior surface roughness.

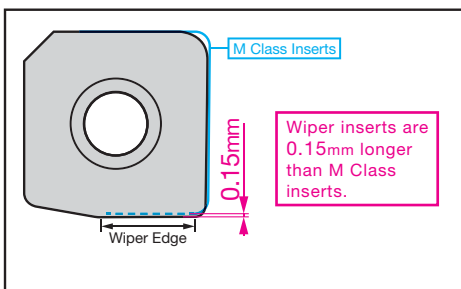

Precautions when Using Wiper Inserts

- The wiper insert has a single corner specification.
- Attach the wiper insert so that the chamfered corner is in location (1) shown in the figure.
- Use the corner with the ID mark. (2) (08-size inserts have no marks.)
- Refer to page N17 for details about wiper inserts.

WFX 08000R(S) type

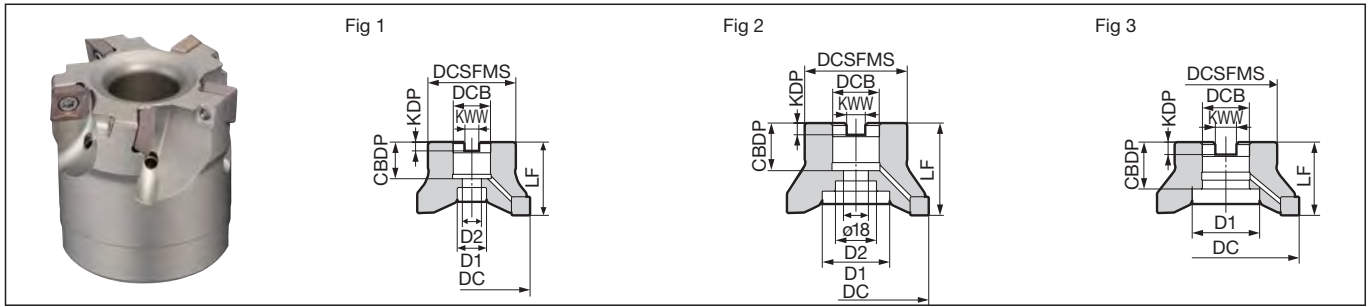

Body (Standard Pitch)

Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Dimensions (mm)	
													Fig	
WFX 08040RS	●	40	33	40	16	8.4	5.6	18	14	9	3	0.2	1	
08050RS	●	50	41	40	22	10.4	6.3	20	18	11	4	0.3	1	
08063RS	●	63	50	40	22	10.4	6.3	20	18	11	5	0.6	1	
08080RS	●	80	55	50	27	12.4	7	22	20	14	6	1.0	1	
08100RS	●	100	70	50	32	14.4	8	32	46	—	8	1.4	3	
WFX 08080R	●	80	55	50	25.4	9.5	6	25	20	14	6	1.0	1	
08100R	●	100	70	63	31.75	12.7	8	32	46	27	8	1.9	2	

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Insert

Grade Classification	Coated Carbide								Cemented Carbide	DL	Cermet	Corner Radius RE	Fig
	High-speed/Light Cutting	Medium Cutting	Roughing						H1	DL1000	T4500A		
Process	●	●	●	●	●	●	●	●	●	●	●		
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300			
SOMT 080304PZER-L	●	●	●	●	●	●	●	●	●	●	—	0.4	1
080308PZER-L	●	●	●	●	●	●	●	●	●	●	—	0.8	1
SOMT 080304PZER-G	●	●	●	●	●	●	●	●	●	●	—	0.4	1
080308PZER-G	●	●	●	●	●	●	●	●	●	●	—	0.8	1
080312PZER-G	●	●	●	●	●	●	●	●	●	●	—	1.2	1
SOMT 080308PZER-H	●	●	●	●	●	●	●	●	●	●	—	0.8	1
080312PZER-H	●	●	●	●	●	●	●	●	●	●	—	1.2	1
SOET 080304PZER-G	●	●	●	●	●	●	●	●	●	●	●	0.4	1
080308PZER-G	●	●	●	●	●	●	●	●	●	●	●	0.8	1
080312PZER-G	●	●	●	●	●	●	●	●	●	●	●	1.2	1
SOET 080302PZFR-S	—	—	—	—	—	—	—	—	●	●	—	0.2	1
080304PZFR-S	—	—	—	—	—	—	—	—	●	●	—	0.4	1
080308PZFR-S	—	—	—	—	—	—	—	—	●	●	—	0.8	1
XOEW 080308PZTR-W	●	—	—	—	—	—	—	—	—	●	—	—	2

Fig 1





Fig 2



Refer to H109 (Precautions when Using Wiper Inserts) (Mounting Precautions).

Identification Code



Parts


Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	2.0 TRDR08IP	SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.08-0.12-0.18	< 6	ACU2500
	Mild Steel	≤ 180HB	180-250-350	0.10-0.15-0.20	< 6	ACP200
	Die Steel	200 to 220 HB	100-150-200	0.08-0.12-0.18	< 4	ACP300 XCU2500
M	Stainless Steel	—	160-200-250	0.10-0.15-0.20	< 6	ACU2500 ACM300
K	Cast Iron	250HB	100-175-250	0.10-0.15-0.20	< 6	ACU2500 ACK200 ACK300 XCU2500 XCK2000
N	Non-Ferrous Metals	—	300-500-1,000	0.10-0.15-0.20	< 6	H1 DL1000
S	Exotic Alloy	—	30-50-80	0.08-0.13-0.18	< 6	ACU2500 ACM200 ACM300

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WFXM 08000R(S) type

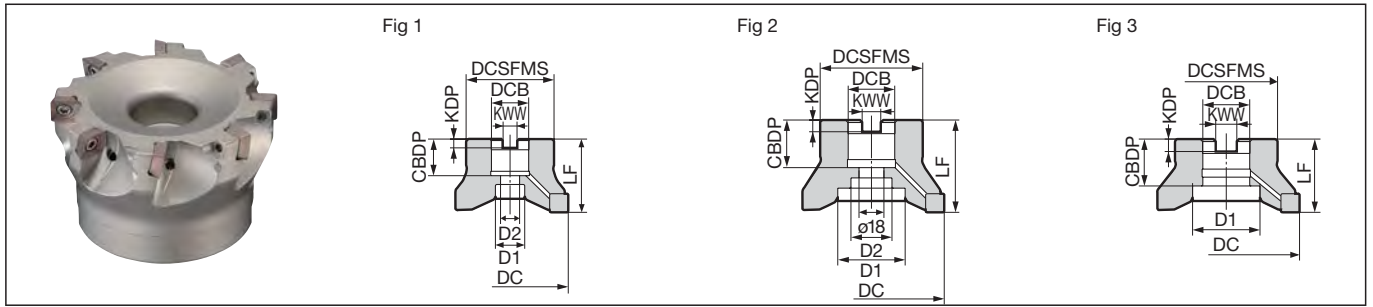

Body (Fine Pitch)

													Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig	
WFXM 08040RS	●	40	33	40	16	8.4	5.6	18	14	9	4	0.2	1	
08050RS	●	50	41	40	22	10.4	6.3	20	18	11	5	0.3	1	
08063RS	●	63	50	40	22	10.4	6.3	20	18	11	6	0.5	1	
08080RS	●	80	55	50	27	12.4	7	22	20	14	8	1.0	1	
08100RS	●	100	70	50	32	14.4	8	32	46	—	10	1.4	3	
WFXM 08080R	●	80	55	50	25.4	9.5	6	25	20	14	8	1.0	1	
08100R	●	100	70	63	31.75	12.7	8	32	46	27	10	1.9	2	


Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Insert

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet	Dimensions (mm)	
	High-speed/Light Cutting								H1	DL1000	T4500A	Corner Radius RE	Fig
	Medium Cutting												
Roughing													
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300			
SOMT 080304PZER-L	●	●	●	●	●	●	●	●	●	●	0.4	1	
080308PZER-L	●	●	●	●	●	●	●	●	●	●	0.8	1	
SOMT 080304PZER-G	●	●	●	●	●	●	●	●	●	●	0.4	1	
080308PZER-G	●	●	●	●	●	●	●	●	●	●	0.8	1	
080312PZER-G	●	●	●	●	●	●	●	●	●	●	1.2	1	
SOMT 080308PZER-H	●	●	●	●	●	●	●	●	●	●	0.8	1	
080312PZER-H	●	●	●	●	●	●	●	●	●	●	1.2	1	
SOET 080304PZER-G	●	●	●	●	●	●	●	●	●	●	0.4	1	
080308PZER-G	●	●	●	●	●	●	●	●	●	●	0.8	1	
080312PZER-G	●	●	●	●	●	●	●	●	●	●	1.2	1	
SOET 080302PZFR-S	—	—	—	—	—	—	—	—	●	—	0.2	1	
080304PZFR-S	—	—	—	—	—	—	—	—	●	—	0.4	1	
080308PZFR-S	—	—	—	—	—	—	—	—	●	—	0.8	1	
XOEW 080308PZTR-W	●	—	—	—	—	—	●	—	—	●	—	2	

Refer to H109 (Precautions when Using Wiper Inserts) (Mounting Precautions).

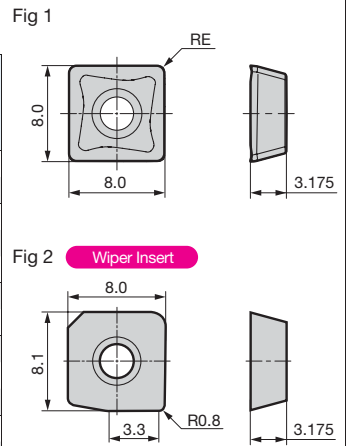

Identification Code

WFX Series Code **M** Fine Pitch **08** Insert Size **040** Dia. **R** Feed Direction **S** Metric Bore

Recommended Cutting Conditions



ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.08-0.12-0.18	< 6	ACU2500
	Mild Steel	≤ 180HB	180-250-350	0.10-0.15-0.20	< 6	ACP200
	Die Steel	200 to 220 HB	100-150-200	0.08-0.12-0.18	< 4	ACP300
M	Stainless Steel	—	160-200-250	0.10-0.15-0.20	< 6	XCU2500
K	Cast Iron	250HB	100-175-250	0.10-0.15-0.20	< 6	ACU2500
						ACK300
						XCK2000
N	Non-Ferrous Metals	—	300-500-1,000	0.10-0.15-0.20	< 6	H1
S	Exotic Alloy	—	30-50-80	0.08-0.13-0.18	< 6	DL1000
						ACU2500
						ACM200
						ACM300

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	TRDR08IP	SUMI-P

WFXF 08000R(S) type

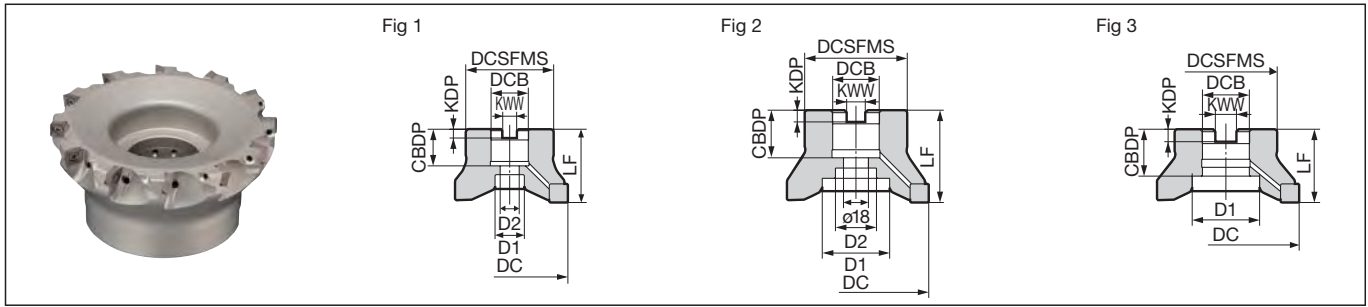

Body (Extra Fine Pitch)


												Dimensions (mm)		
Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig	
WFXF 08040RS	●	40	33	40	16	8.4	5.6	18	14	9	6	0.2	1	
08050RS	●	50	41	40	22	10.4	6.3	20	18	11	7	0.3	1	
08063RS	●	63	50	40	22	10.4	6.3	20	18	11	8	0.5	1	
08080RS	●	80	55	50	27	12.4	7	22	20	14	10	0.9	1	
08100RS	●	100	70	50	32	14.4	8	32	46	—	12	1.4	3	
WFXF 08080R	●	80	55	50	25.4	9.5	6	25	20	14	10	1.0	1	
08100R	●	100	70	63	31.75	12.7	8	32	46	27	12	1.9	2	

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Insert

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet	Dimensions (mm)						
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A	Corner Radius RE	Fig
Process	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—
Cat. No.	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	●	0.4	1
SOMT 080304PZER-L	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
080308PZER-L	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
SOMT 080304PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
080308PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
080312PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOMT 080308PZER-H	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
080312PZER-H	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
SOET 080304PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
080308PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	●	1.2	1
080312PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	●	0.2	1
SOET 080302PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	0.4	1
080304PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	0.8	1
080308PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	0.8	1
XOEW 080308PZTR-W	●	—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	—	2

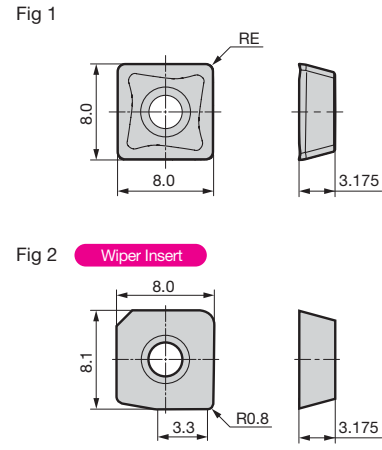

Refer to H109 (Precautions when Using Wiper Inserts) (Mounting Precautions).

Identification Code

WFX F 08 040 R S
 Series Code Extra Insert Dia. Feed Metric
 Fine Pitch Size Direction Bore

Parts


Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	2.0	TRDR08IP SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.08-0.12-0.18	< 6	ACU2500
	Mild Steel	≤ 180HB	180-250-350	0.10-0.15-0.20	< 6	ACP200
	Die Steel	200 to 220 HB	100-150-200	0.08-0.12-0.18	< 4	ACP300
M	Stainless Steel	—	160-200-250	0.10-0.15-0.20	< 6	XCU2500
						ACM300
K	Cast Iron	250HB	100-175-250	0.10-0.15-0.20	< 6	ACU2500
N	Non-Ferrous Metals	—	300-500-1,000	0.10-0.15-0.20	< 6	H1
						DL1000
S	Exotic Alloy	—	30-50-80	0.08-0.13-0.18	< 6	ACU2500
						ACM200
						ACM300

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WFX 12000R(S) type

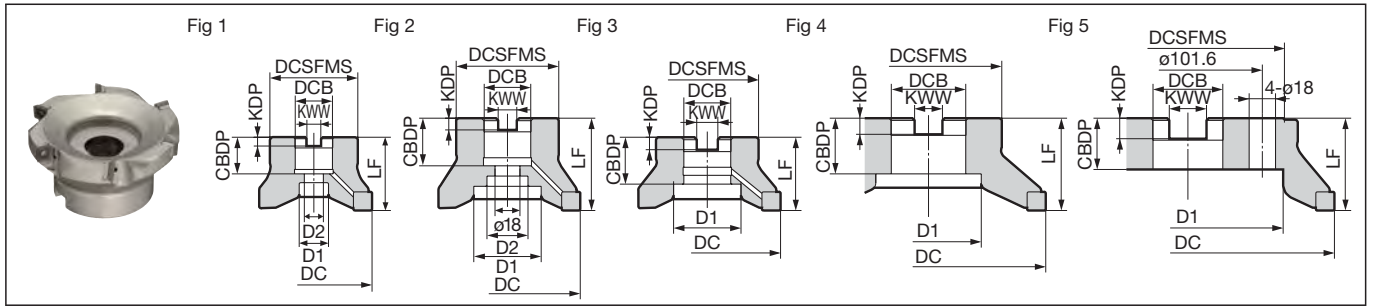

Body (Standard Pitch)

													Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig	
WFX 12050RS	●	50	41	40	22	10.4	6.3	20	18	11	3	0.3	1	
12063RS	●	63	50	40	22	10.4	6.3	20	18	11	4	0.5	1	
12080RS	●	80	55	50	27	12.4	7	22	20	14	4	0.9	1	
12100RS	●	100	70	50	32	14.4	8	32	46	—	5	1.3	3	
WFX 12080R	●	80	55	50	25.4	9.5	6	25	20	14	4	0.9	1	
12100R	●	100	70	63	31.75	12.7	8	32	46	27	5	1.7	2	
12125R	●	125	80	63	38.1	15.9	10	35.5	55	30	6	2.4	1	
12160R	●	160	100	63	50.8	19.1	11	38	72	—	8	3.6	4	
12200R	●	200	160	63	47.625	25.4	14	35	135	—	10	6.8	5	
12250R	●	250	180	63	47.625	25.4	14	35	160	—	12	9.6	5	

Inserts are sold separately. Sizes ø160mm and above do not have coolant holes.



Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Cermet			
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A	Corner Radius RE	Fig
SOMT 120408PDER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOMT 120404PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
120408PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
120412PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
120416PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
SOMT 120408PDER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOET 120408PDFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
XOEW 120408PDTR-W	●	—	—	—	—	—	—	—	—	—	—	—	●	—	2

Refer to H109 (Precautions when Using Wiper Inserts) (Mounting Precautions).

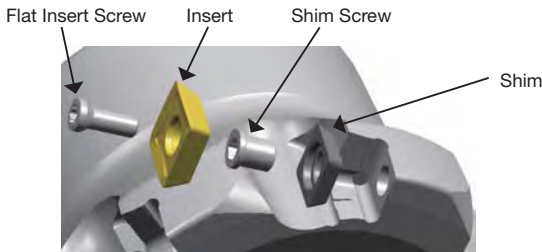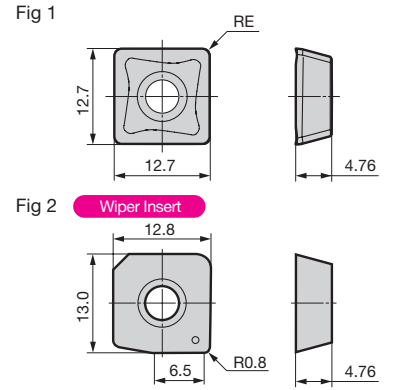

Identification Code

WFX 12 050 R S

Series Code Insert Size Dia. Feed Metric Direction Bore

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.10-0.15-0.20	< 10	ACU2500 ACP200 ACP300
	Mild Steel	≤ 180HB	180-250-350	0.10-0.15-0.20	< 10	XCU2500
	Die Steel	200 to 220 HB	100-150-200	0.10-0.15-0.20	< 6	
M	Stainless Steel	—	160-200-250	0.10-0.15-0.20	< 10	ACU2500 ACM300
K	Cast Iron	250HB	100-175-250	0.10-0.15-0.20	< 10	ACK200 ACK300 XCU2500 XCK2000
N	Non-Ferrous Metals	—	300-500-1,000	0.10-0.15-0.20	< 10	H1 DL1000
S	Exotic Alloy	—	30-50-80	0.10-0.15-0.20	< 10	ACU2500 ACM200 ACM300



Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench Handle Grip	Bit	Anti-seizure Cream	
DC ø50 to 125 Other than above	WFXS4R	BW0507F	LH035	BFTX03512IP	3.0	TRDR15IP	HPS1015	TRB15IP	SUMI-P

Recommended Tightening Torque (N-m) ● mark: Standard Stocked Item (new product/expanded item)

WFXF 12000R(S) type

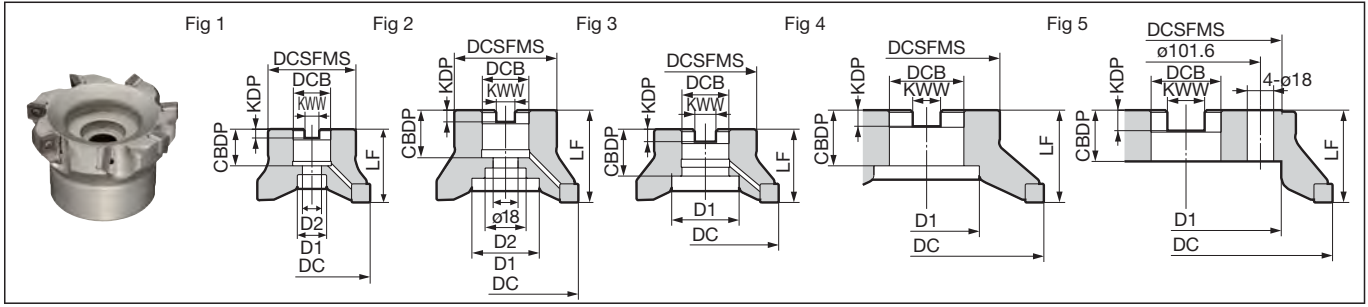

Body (Extra Fine Pitch)

Cat. No.		Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	WFXF 12050RS	●	50	41	40	22	10.4	6.3	20	18	11	4	0.3	1
	12063RS	●	63	50	40	22	10.4	6.3	20	18	11	5	0.5	1
	12080RS	●	80	55	50	27	12.4	7	22	20	14	6	0.9	1
	12100RS	●	100	70	50	32	14.4	8	32	46	—	7	1.3	3
Inch	WFXF 12080R	●	80	55	50	25.4	9.5	6	25	20	14	6	0.9	1
	12100R	●	100	70	63	31.75	12.7	8	32	46	27	7	1.7	2
	12125R	●	125	80	63	38.1	15.9	10	35.5	55	30	8	2.3	1
	12160R	●	160	100	63	50.8	19.1	11	38	72	—	12	3.5	4
	12200R	●	200	160	63	47.625	25.4	14	35	135	—	16	6.7	5
12250R	●	250	180	63	47.625	25.4	14	35	160	—	18	9.5	5	


Inserts are sold separately. Sizes ø160mm and above do not have coolant holes.

Note: For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).


Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig					
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300			ACM200	ACM300	H1	DL1000	T4500A
SOMT 120408PDER-L	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOMT 120404PDER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
120408PDER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
120412PDER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
120416PDER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
SOMT 120408PDER-H	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOET 120408PDRF-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
XOEW 120408PDTR-W	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	2

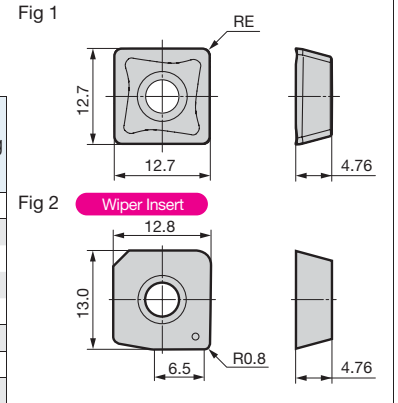

Refer to H109 (Precautions when Using Wiper Inserts) (Mounting Precautions).

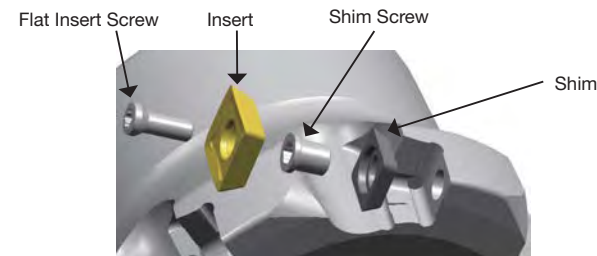

Parts

Applicable Cutter	Shim	Shim Screw	Wrench	Flat Insert Screw	Integrated Wrench	Detachable Wrench Handle Grip	Wrench Bit	Anti-seizure Cream	
DC ø50 to 125 Other than above	WFXS4R	BW0507F	LH035	BFTX03512IP	3.0	TRDR15IP	HPS1015	TRB15IP	SUMI-P

Identification Code



WFX F 12 050 R S
 Series Code Extra Fine Insert Dia. Feed Metric
 Pitch Size Direction Bore

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.10-0.15-0.20	< 10	ACU2500 ACP200 ACP300 XCU2500
	Mild Steel	≤ 180HB	180-250-350	0.10-0.15-0.20	< 10	
	Die Steel	200 to 220 HB	100-150-200	0.10-0.15-0.20	< 6	
M	Stainless Steel	—	160-200-250	0.10-0.15-0.20	< 10	ACU2500 ACM300
K	Cast Iron	250HB	100-175-250	0.10-0.15-0.20	< 10	ACU2500 ACK200 ACK300 XCU2500 XCK2000
N	Non-Ferrous Metals	—	300-500-1,000	0.10-0.15-0.20	< 10	H1 DL1000
S	Exotic Alloy	—	30- 50 -80	0.10-0.15-0.20	< 10	ACU2500 ACM200 ACM300

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WFX 08000E type

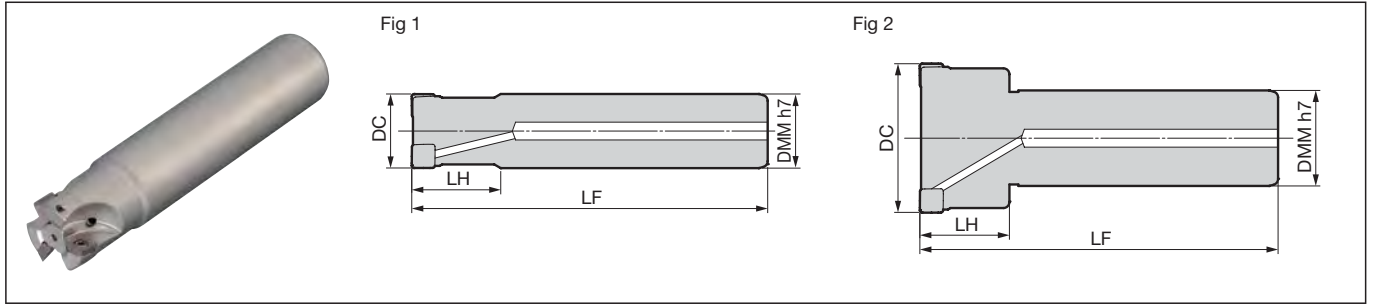

Body (Standard Pitch)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Fig
WFX 08020E-16	●	20	16	30	110	2	1
08020E	●	20	20	30	110	2	1
08022E	●	22	20	30	120	2	1
08025E-20	●	25	20	30	120	2	1
08025E	●	25	25	30	120	2	1
08028E	●	28	25	30	120	2	1
08030E	●	30	25	30	120	3	1
08032E	●	32	32	30	120	3	1
08033E	●	33	32	30	120	3	1
08040E	●	40	32	30	120	3	2
08050E	●	50	32	30	120	4	2
08063E	●	63	32	30	120	5	2

Body (Fine Pitch)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Fig
WFXM 08025E	●	25	25	30	120	3	1
08032E	●	32	32	30	120	4	1
08040E	●	40	32	30	120	4	2
08050E	●	50	32	30	120	5	2
08063E	●	63	32	30	120	6	2

Inserts are sold separately.


Inserts are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet	Dimensions (mm)						
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A	Corner Radius RE	Fig
SOMT 080304PZER-L	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
080308PZER-L	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOMT 080304PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
080308PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
080312PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
SOMT 080308PZER-H	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
080312PZER-H	●	●	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
SOET 080304PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.4	1
080308PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.8	1
080312PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	1.2	1
SOET 080302PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	—	0.2	1
080304PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	—	0.4	1
080308PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
XOEW 080308PZTR-W	●	—	—	—	—	—	—	—	—	—	—	—	—	—	—	●	—	2

Refer to H109 (Precautions when Using Wiper Inserts) (Mounting Precautions).

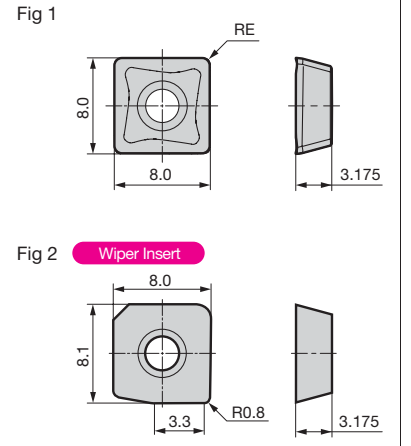

Identification Code

WFX **M** **08** **025** **E**
 Series Code Fine Pitch Insert Size Dia. Shank type

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	2.0 TRDR08IP	SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150-200-250	0.08-0.12-0.18	< 6	ACU2500
	Mild Steel	≤ 180HB	180-250-350	0.10-0.15-0.20	< 6	ACP200
	Die Steel	200 to 220 HB	100-150-200	0.08-0.12-0.18	< 4	ACP300 XCU2500
M	Stainless Steel	—	160-200-250	0.10-0.15-0.20	< 6	ACU2500 ACM300
K	Cast Iron	250HB	100-175-250	0.10-0.15-0.20	< 6	ACU2500 ACK200 ACK300 XCU2500 XCK2000
N	Non-Ferrous Metals	—	300-500-1,000	0.10-0.15-0.20	< 6	H1 DL1000
S	Exotic Alloy	—	30-50-80	0.08-0.13-0.18	< 6	ACU2500 ACM200 ACM300

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Recommended Tightening Torque (N-m) ● mark: Standard Stocked Item (new product/expanded item)

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling


T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

WFX(F) 12000E type



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

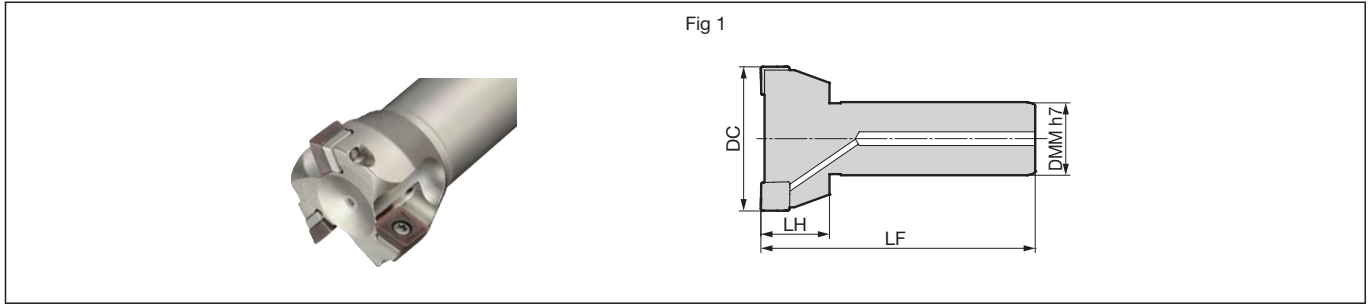

Body (Standard Pitch)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WFX 12040E	●	40	32	30	120	3	0.68	1
12050E	●	50	32	30	120	3	0.78	1
12063E	●	63	32	30	120	4	0.94	1
12080E	●	80	32	30	120	4	1.29	1

Body (Extra Fine Pitch)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WFXF 12050E	●	50	32	30	120	4	0.78	1
12063E	●	63	32	30	120	5	0.96	1
12080E	●	80	32	30	120	6	1.22	1

Inserts are sold separately.

Inserts are sold separately. ø40mm size does not have shims.


Insert

Dimensions (mm)


Grade Classification	Coated Carbide							Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig	
	High-speed/Light Cutting	Medium Cutting	Roughing										
Process	High-speed/Light Cutting	Medium Cutting	Roughing										
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A
SOMT 120408PDER-L	●	●	●	●	●	●	●	●	●	●	—	—	—
SOMT 120404PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—
120408PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	●
120412PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—
120416PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—
SOMT 120408PDER-H	●	●	●	●	●	●	●	●	●	●	—	—	—
SOET 120408PDRF-S	—	—	—	—	—	—	—	—	—	—	●	●	—
XOEW 120408PDTR-W	●	—	—	—	—	—	—	—	—	—	—	—	●

Fig 1

Fig 2

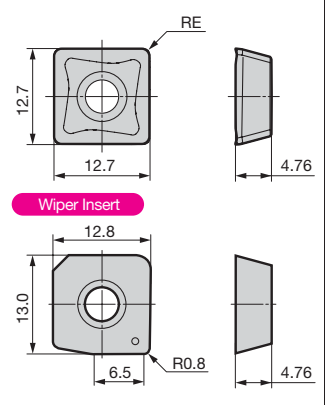

Refer to H109 (Precautions when Using Wiper Inserts) (Mounting Precautions).

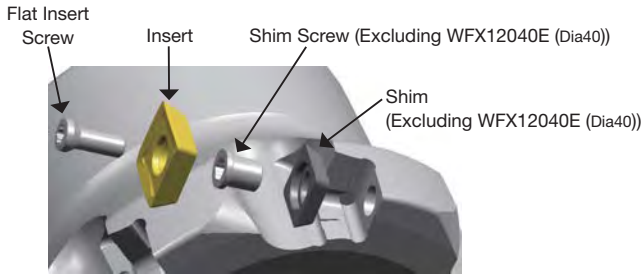

Identification Code

WFX F 12 050 E
 Series Code Extra Fine Pitch Insert Size Dia. Shank type

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150- 200 -250	0.10- 0.15 -0.20	< 10	ACU2500 ACP200 ACP300 XCU2500
	Mild Steel	≤ 180HB	180- 250 -350	0.10- 0.15 -0.20	< 10	
	Die Steel	200 to 220 HB	100- 150 -200	0.10- 0.15 -0.20	< 6	
M	Stainless Steel	—	160- 200 -250	0.10- 0.15 -0.20	< 10	ACU2500 ACM300
K	Cast Iron	250HB	100- 175 -250	0.10- 0.15 -0.20	< 10	ACU2500 ACK200 ACK300 XCU2500 XCK2000
N	Non-Ferrous Metals	—	300- 500 -1,000	0.10- 0.15 -0.20	< 10	H1 DL1000
S	Exotic Alloy	—	30- 50 -80	0.10- 0.15 -0.20	< 10	ACU2500 ACM200 ACM300

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts



Shim	Shim Screw	Wrench	Flat Insert Screw	Wrench	Anti-seizure Cream	
WFXS4R	BW0507F	LH035	BFTX03512IP	3.0	TRDR15IP	SUMI-P

ø40mm size does not have shims.



■ Features

- The high-efficiency general-purpose/shoulder milling SEC-Sumi Dual Mill DFC series cutter has a unique insert shape with both excellent sharpness and cutting edge strength, enabling it to be used for a wider range of applications from high-efficiency machining through to finishing. Further expansion of the shoulder milling GS type chipbreaker, suitable for a wide range of applications.
- Applicable to various work materials
In addition to the general-purpose grade ACU2500, the new-generation coated carbide grades XCU2500/XCK2000 are now available. Applicable to various work materials such as steel, stainless steel, cast iron, exotic alloys, and more.

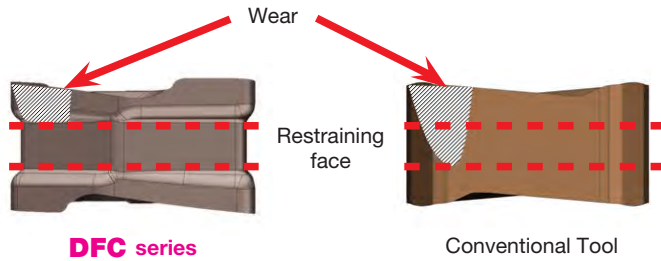

Unique insert shape provides both sharpness and cutting edge strength


Flank wear of inserts for DFC series does not reach the restraining face and thus mounting accuracy does not suffer

The 90° cutting angle is suitable for both face milling and shoulder milling



GS type Chipbreaker for Shoulder Milling

- Excellent chip control
- Suppresses machined surface deterioration due to chip biting

Work Material: S50C Tool: $\phi 100\text{mm}$
Cutting Conditions: $v_c = 200\text{m/min}$, $f_z = 0.2\text{mm/t}$, $a_e = 50\text{mm}$, $a_p = 3\text{mm} \times 6$ Passes, Dry

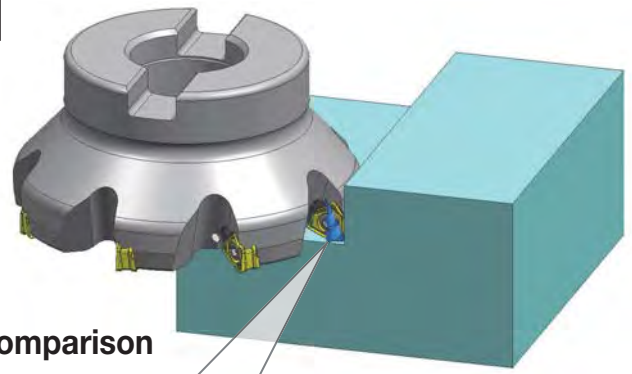

Chip generation image and machined surface comparison

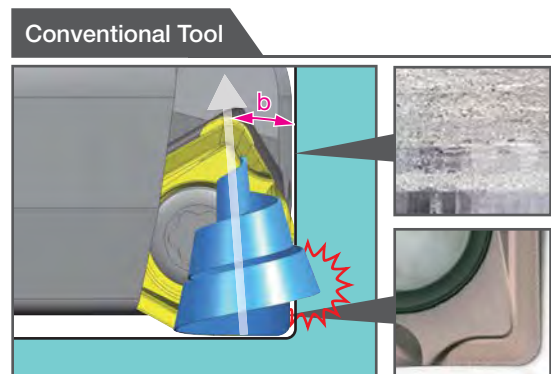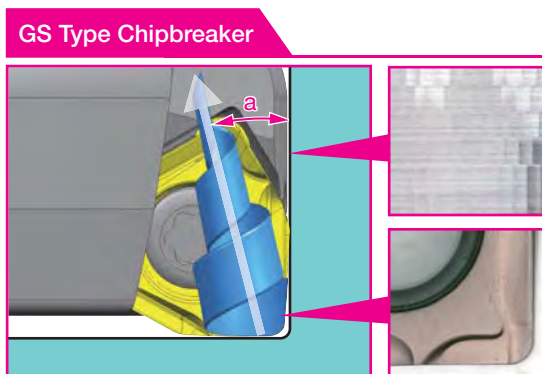

Chip flow direction control ($a > b$) \Rightarrow chip biting suppressed


SEC-Sumi Dual Mill DFC series

■ Cutting Performance

Face Milling



(1) Machined surface roughness:
Better than competitors' products

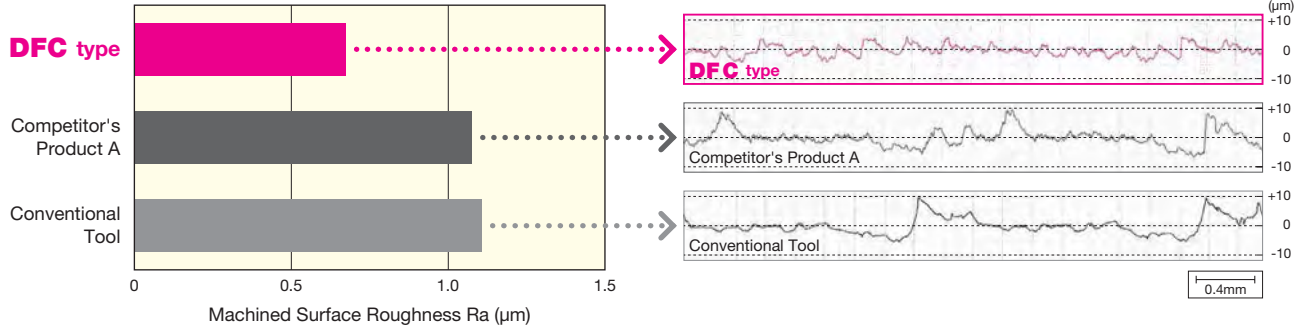



Work Material: S50C Tool: DFC 09100RS Insert: XNMU 060608PNER-G Grade: ACP200 Cutting Conditions: $v_c = 200\text{m/min}$, $f_z = 0.2\text{mm/t}$, $a_p = 3\text{mm}$, $a_e = 85\text{mm}$, Dry

(2) Cutting edge strength/Cutting edge damage during heavy interrupted cutting:
Cutting edge strength surpasses competitors' double-sided cutters


	fz(mm/t)		
	0.3	0.4	0.5
DFC type	○	○	○
Competitor's Product B (Double-sided, 6 Corners)	○	Damage (Midway through 2 passes)	
Competitor's Product C (Double-sided, 6 Corners)	Damage (Midway through 3 passes)		
Competitor's Product D (Double-sided tangential)	Damage (Midway through 3 passes)		

(Cutting Distance: 0.9m)


Work Material: S50C (With Holes)
Tool: DFC 09100RS
Insert: XNMU 060608PNER-G Grade: ACP300
Cutting Conditions: $v_c = 150\text{m/min}$, $a_p = 3\text{mm}$, $a_e = 50\text{mm}$, Dry

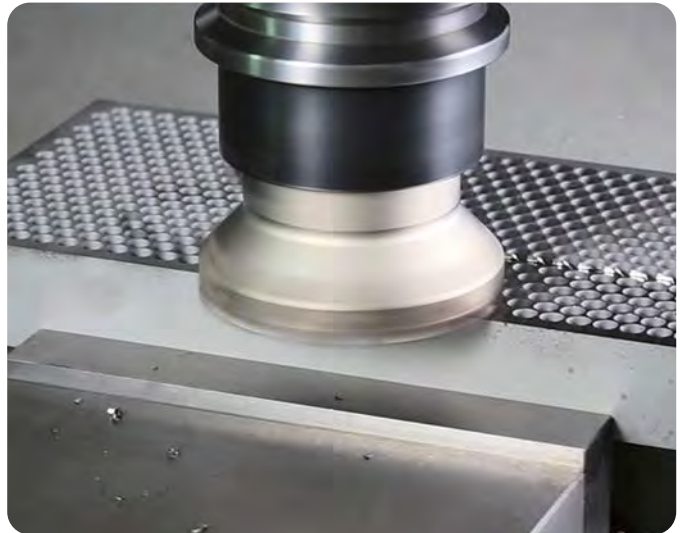

(3) Wear resistance: **Achieves long tool life thanks to excellent wear resistance**

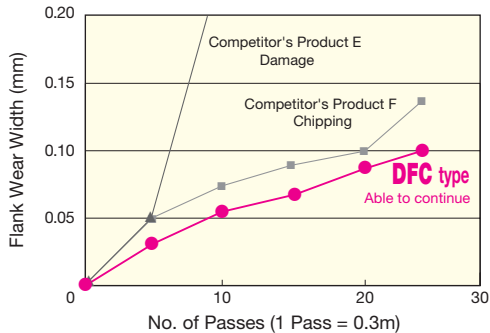

Comparison of cutting edge damage

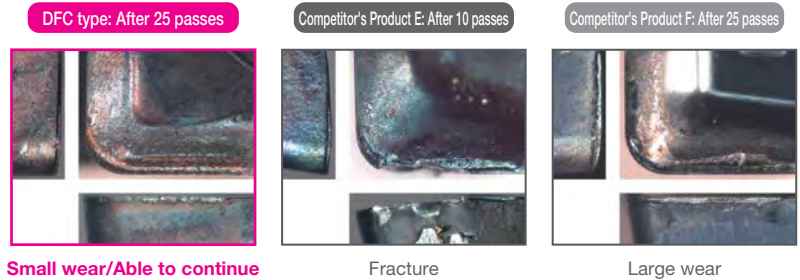

Work Material: S50C Tool: DFC 09100RS Insert: XNMU 060608PNER-G Grade: ACP200 Cutting Conditions: $v_c = 200\text{m/min}$, $f_z = 0.2\text{mm/t}$, $a_p = 3\text{mm}$, $a_e = 85\text{mm}$, Dry

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Applications and Recommended Chipbreakers

Face Milling G	Shoulder Milling GS	Side Milling G/GS	Helical Milling	Ramping
Guidelines for Shoulder Milling Conditions Maximum Radial Depth of Cut G type: $a_e \leq 10\%$ of cutter diameter GS type: $a_e \leq 50\%$ of cutter diameter Recommended Axial Depth of Cut $a_p = 3\text{mm}$ Recommended Feed Rate $f_z \leq 0.2\text{mm/t}$ (for general steel)			Applications which are not applicable	

Product Range

Type	Cat. No.	Description	Dia. (mm)									Shape	
			ø25	ø32	ø40	ø50	ø63	ø80	ø100	ø125	ø160		ø200
Shell	DFC 09000R	Standard Pitch						5	6	7	8	10	
	DFC 09000RS	Standard Pitch				4	4	5	6	7	8	10	
	DFCM 09000R	Fine Pitch						7	8	11	12	16	
	DFCM 09000RS	Fine Pitch				5	6	7	8	11	12	16	
	DFCF 09000R	Extra Fine Pitch						9	11	14	16	20	
	DFCF 09000RS	Extra Fine Pitch				6	7	9	11	14	16	20	
Shank	DFC 09000E	Standard Pitch	2	2	3	3*	4*	5*					
	DFCM 09000E	Fine Pitch		3	4	5*	6*	7*					

Number in ● shows the number of teeth Inch Bore *mark: Different diameter shanks in stock

Insert Grades


The newly developed general-purpose ACU2500 grade suitable for various work materials has now been released. Lineup of Steel Milling Grades ACP100/ACP200/ACP300, Stainless Steel Milling Grades ACM200/ACM300, Cast Iron Milling Grades ACK200/ACK300 and more to suit a wide range of work materials.



Chipbreaker Selection

Work Material				
Applications	Light Cutting	General-purpose to Interrupted Milling	Shoulder Milling	Heavy Cutting
Features	Low Rigidity Milling, Reduction of Burrs	Face Milling	Shoulder Milling	Heavy Side Milling, Hardened Steel
Chipbreaker	L type	G type	GS type	H type
Cutting Edge Cross Section				



Chipbreaker Selection Guide

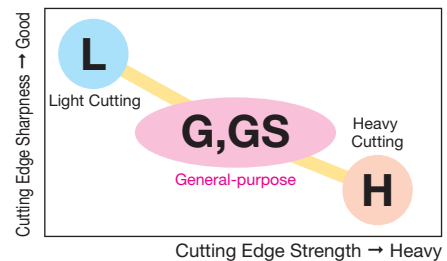

Insert Mounting Precautions

	Make sure there is no gap		Place the insert face flat onto the cutter's insert pocket and tighten the flat insert screw with the recommended torque.
--	---------------------------	--	---

DFC 09000R(S) type

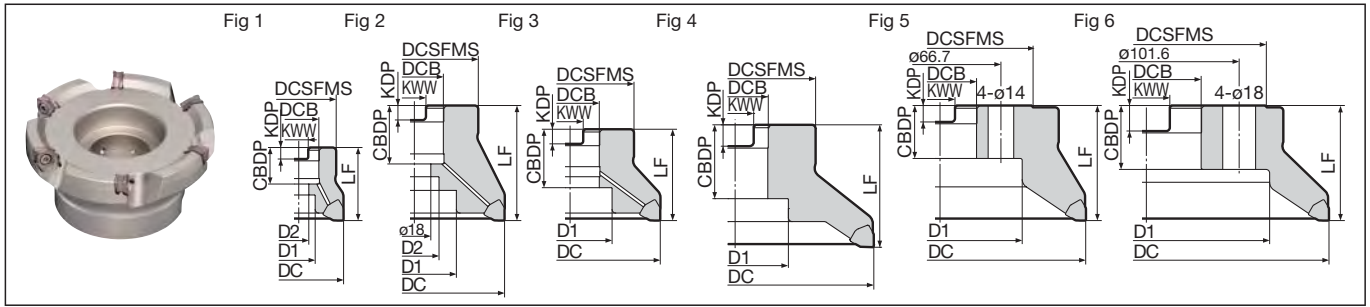

Body (Standard Pitch)

												Dimensions (mm)		
Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig	
DFC 09050RS	●	50	41	40	22	10.4	6.3	20	18	11	4	0.3	1	
09063RS	●	63	50	40	22	10.4	6.3	20	18	11	4	0.5	1	
09080RS	●	80	55	50	27	12.4	7	22	20	14	5	1.0	1	
09100RS	●	100	70	50	32	14.4	8	32	46	—	6	1.4	3	
09125RS	●	125	80	63	40	16.4	9	29	52	29	7	2.8	1	
09160RS	●	160	100	63	40	16.4	9	29	90	—	8	4.6	5	
09200RS	●	200	130	63	60	25.7	14	35	135	—	10	5.7	6	
DFC 09080R	●	80	55	50	25.4	9.5	6	25	20	14	5	1.0	1	
09100R	●	100	70	63	31.75	12.7	8	32	46	27	6	2.0	2	
09125R	●	125	80	63	38.1	15.9	10	35.5	55	30	7	2.8	1	
09160R	●	160	100	63	50.8	19.1	11	38	72	—	8	3.6	4	
09200R	●	200	130	63	47.625	25.4	14	35	135	—	10	6.0	6	


Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide										Dimensions (mm)		
Process	High-speed/Light Cutting												Corner Radius RE	Fig
	Medium Cutting													
	Roughing													
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300			
XNMU 060604PNER-L	●	●	—	●	●	●	●	—	●	—	●	0.4	1	
060608PNER-L	●	●	—	●	●	●	●	—	●	—	●	0.8	1	
XNMU 060604PNER-G	●	●	●	●	●	●	●	●	●	●	●	0.4	1	
060608PNER-G	●	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-G	●	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-G	●	●	●	●	●	●	●	●	●	●	●	1.6	1	
XNMU 060604PNER-GS	●	●	●	●	●	●	●	●	●	●	●	0.4	1	
060608PNER-GS	●	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-GS	●	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-GS	●	●	●	●	●	●	●	●	●	●	●	1.6	1	
XNMU 060608PNER-H	●	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-H	●	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-H	●	●	●	●	●	●	●	●	●	●	●	1.6	1	

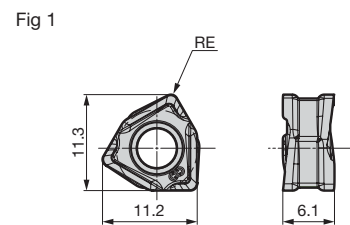

Identification Code

DFC 09 050 R S

Series Code Insert Size Cutter Dia. Feed Direction Metric Bore

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150 - 200 - 250	0.10 - 0.20 - 0.30	< 6	ACU2500 ACP200 ACP300 XCU2500
	Mild Steel	≤ 180HB	180 - 250 - 350	0.15 - 0.25 - 0.35	< 6	
	Die Steel	200 to 220 HB	100 - 150 - 200	0.10 - 0.18 - 0.25	< 4	
M	Stainless Steel	—	160 - 205 - 250	0.12 - 0.18 - 0.25	< 6	ACU2500 ACM300
K	Cast Iron	250HB	100 - 175 - 250	0.10 - 0.20 - 0.30	< 6	ACU2500 ACK200 ACK300 XCU2500 XCK2000
S	Exotic Alloy	—	30 - 50 - 80	0.10 - 0.20 - 0.30	< 6	ACU2500 ACM200 ACM300



For shoulder milling, the GS type chipbreaker is recommended. Use at ae ≤ 50% of cutter diameter and fz ≤ 0.2mm/t.

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream
			Handle Grip	Bit	
DC ø50 to 125	BFTX03512IP	—	HPS1015	TRB15IP	SUMI-P
Other than above	—	TRDR15IP	—	—	

DFCM 09000R(S) type

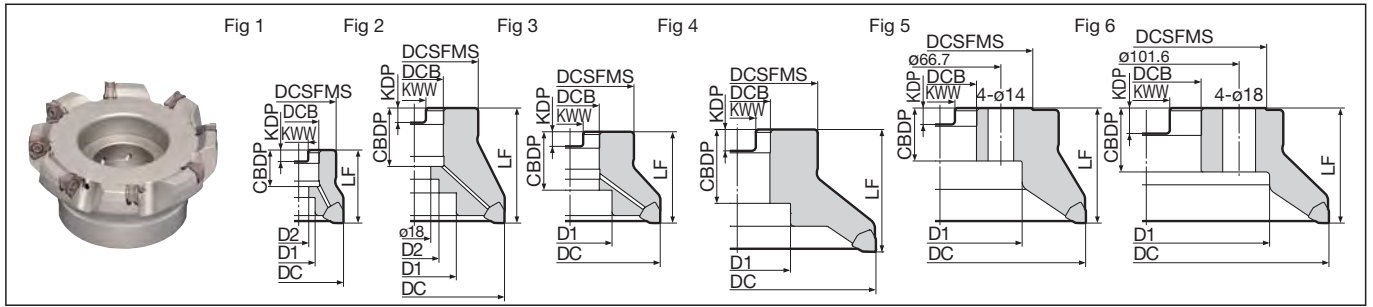

Body (Fine Pitch)

Cat. No.		Stock	Dimensions (mm)										Fig	
			Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	
Metric	DFCM 09050RS	●	50	41	40	22	10.4	6.3	20	18	11	5	0.3	1
	09063RS	●	63	50	40	22	10.4	6.3	20	18	11	6	0.5	1
	09080RS	●	80	55	50	27	12.4	7	22	20	14	7	0.9	1
	09100RS	●	100	70	50	32	14.4	8	32	46	—	8	1.4	3
	09125RS	●	125	80	63	40	16.4	9	29	52	29	11	2.7	1
	09160RS	●	160	100	63	40	16.4	9	29	90	—	12	4.5	5
09200RS	●	200	130	63	60	25.7	14	35	135	—	16	5.6	6	
Inch	DFCM 09080R	●	80	55	50	25.4	9.5	6	25	20	14	7	0.9	1
	09100R	●	100	70	63	31.75	12.7	8	32	46	27	8	1.9	2
	09125R	●	125	80	63	38.1	15.9	10	35.5	55	30	11	2.7	1
	09160R	●	160	100	63	50.8	19.1	11	38	72	—	12	3.5	4
	09200R	●	200	130	63	47.625	25.4	14	35	135	—	16	5.9	6


Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide										Dimensions (mm)			
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	Corner Radius RE	Fig		
XNMU 060604PNER-L		●	●	—	●	●	●	—	●	—	●	0.4	1		
060608PNER-L		●	●	—	●	●	●	—	●	—	●	0.8	1		
XNMU 060604PNER-G		●	●	●	●	●	●	●	●	●	●	0.4	1		
060608PNER-G		●	●	●	●	●	●	●	●	●	●	0.8	1		
060612PNER-G		●	●	●	●	●	●	●	●	●	●	1.2	1		
060616PNER-G		●	●	●	●	●	●	●	●	●	●	1.6	1		
XNMU 060604PNER-GS		●	●	●	●	●	●	●	●	●	●	0.4	1		
060608PNER-GS		●	●	●	●	●	●	●	●	●	●	0.8	1		
060612PNER-GS		●	●	●	●	●	●	●	●	●	●	1.2	1		
060616PNER-GS		●	●	●	●	●	●	●	●	●	●	1.6	1		
XNMU 060608PNER-H		●	●	●	●	●	●	●	●	●	●	0.8	1		
060612PNER-H		●	●	●	●	●	●	●	●	●	●	1.2	1		
060616PNER-H		●	●	●	●	●	●	●	●	●	●	1.6	1		

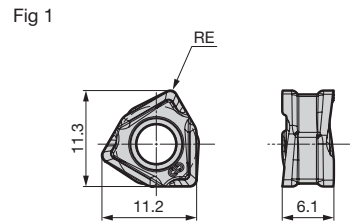

Identification Code

DFC M 09 050 R S
 Series Code Fine Pitch Insert Size Cutter Dia. Feed Direction Metric Bore

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150 - 200 - 250	0.10 - 0.20 - 0.30	< 6	ACU2500 ACP200 ACP300 XCU2500
	Mild Steel	≤ 180HB	180 - 250 - 350	0.15 - 0.25 - 0.35	< 6	
	Die Steel	200 to 220 HB	100 - 150 - 200	0.10 - 0.18 - 0.25	< 4	
M	Stainless Steel	—	160 - 205 - 250	0.12 - 0.18 - 0.25	< 6	ACU2500 ACM300
K	Cast Iron	250HB	100 - 175 - 250	0.10 - 0.20 - 0.30	< 6	ACU2500 ACK200 ACK300 XCU2500 XCK2000
S	Exotic Alloy	—	30 - 50 - 80	0.10 - 0.20 - 0.30	< 6	ACU2500 ACM200 ACM300

For shoulder milling, the GS type breaker is recommended. Use at ae ≤ 50% of cutter diameter and fz ≤ 0.2mm/t.



Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream
			Handle Grip	Bit	
DC ø50 to 125	BFTX03512IP	—	HPS1015	TRB15IP	SUMI-P
Other than above		TRDR15IP	—	—	—

Recommended Tightening Torque (N-m) ● mark: Standard Stocked Item (new product/expanded item)

DFCF 09000R(S) type

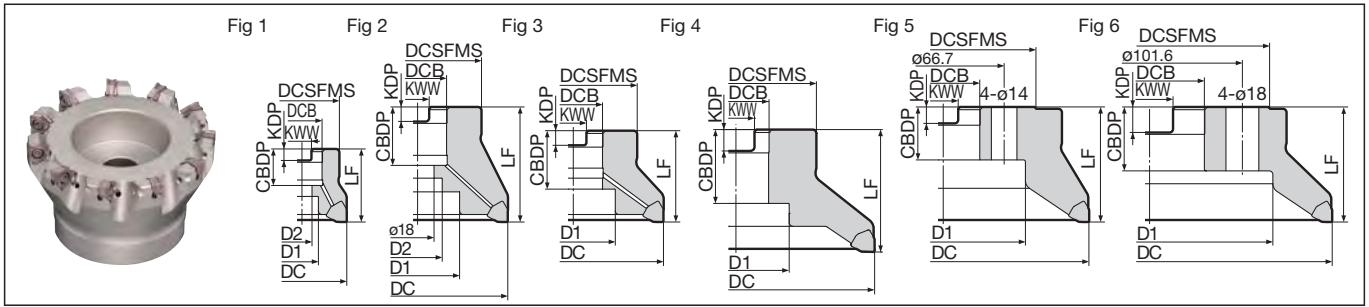

Body (Extra Fine Pitch)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
DFCF 09050RS	●	50	41	40	22	10.4	6.3	20	18	11	6	0.3	1
09063RS	●	63	50	40	22	10.4	6.3	20	18	11	7	0.5	1
09080RS	●	80	55	50	27	12.4	7	22	20	14	9	0.9	1
09100RS	●	100	70	50	32	14.4	8	32	46	—	11	1.3	3
09125RS	●	125	80	63	40	16.4	9	29	52	29	14	2.6	1
09160RS	●	160	100	63	40	16.4	9	29	90	—	16	4.5	5
09200RS	●	200	130	63	60	25.7	14	35	135	—	20	5.5	6
DFCF 09080R	●	80	55	50	25.4	9.5	6	25	20	14	9	0.9	1
09100R	●	100	70	63	31.75	12.7	8	32	46	27	11	1.9	2
09125R	●	125	80	63	38.1	15.9	10	35.5	55	30	14	2.7	1
09160R	●	160	100	63	50.8	19.1	11	38	72	—	16	3.5	4
09200R	●	200	130	63	47.625	25.4	14	35	135	—	20	5.8	6

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note: For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).


Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide										Corner Radius RE	Fig	
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200			ACK300
Process	High-speed/Light Cutting	Medium Cutting	Roughing	●	●	●	●	●	●	●	●	●	●
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	RE	Fig	
XNMU 060604PNER-L	●	●	—	●	●	●	—	●	—	●	0.4	1	
060608PNER-L	●	●	—	●	●	●	—	●	—	●	0.8	1	
XNMU 060604PNER-G	●	●	●	●	●	●	●	●	●	●	0.4	1	
060608PNER-G	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-G	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-G	●	●	●	●	●	●	●	●	●	●	1.6	1	
XNMU 060604PNER-GS	●	●	●	●	●	●	●	●	●	●	0.4	1	
060608PNER-GS	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-GS	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-GS	●	●	●	●	●	●	●	●	●	●	1.6	1	
XNMU 060608PNER-H	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-H	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-H	●	●	●	●	●	●	●	●	●	●	1.6	1	

Fig 1



XNMU060608PNER-■

Identification Code

DFC Series Code **F** Extra Fine Pitch **09** Insert Size **050** Cutter Dia. **R** Feed Direction **S** Metric Bore

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150 - 200 - 250	0.10 - 0.20 - 0.30	< 6	ACU2500 ACP200 ACP300 XCU2500
	Mild Steel	≤ 180HB	180 - 250 - 350	0.15 - 0.25 - 0.35	< 6	
	Die Steel	200 to 220 HB	100 - 150 - 200	0.10 - 0.18 - 0.25	< 4	
M	Stainless Steel	—	160 - 205 - 250	0.12 - 0.18 - 0.25	< 6	ACU2500 ACM300
K	Cast Iron	250HB	100 - 175 - 250	0.10 - 0.20 - 0.30	< 6	ACU2500 ACK200 ACK300 XCU2500 XCK2000
S	Exotic Alloy	—	30 - 50 - 80	0.10 - 0.20 - 0.30	< 6	ACU2500 ACM200 ACM300


For shoulder milling, the GS type breaker is recommended. Use at ae ≤ 50% of cutter diameter and fz ≤ 0.2mm/t.

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Applicable Cutter	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream
			Handle Grip	Bit	
DC ø50 to 125	BFTX03512IP	—	HPS1015	TRB15IP	SUMI-P
Other than above	—	TRDR15IP	—	—	

DFC(M) 09000E type

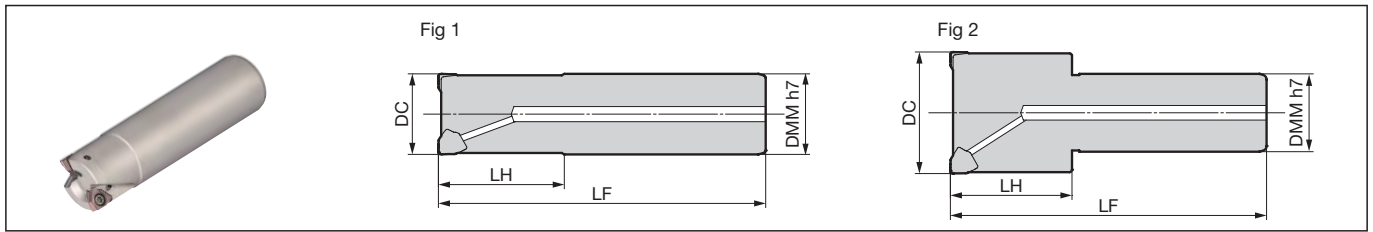

Body (Standard Pitch)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length		Number of Teeth	Fig
					LF			
DFC 09025E	●	25	25	40	120		2	1
09032E	●	32	32	50	130		2	1
09040E	●	40	32	50	130		3	2
09050E	●	50	32	50	130		3	2
09050E-42	●	50	42	50	150		3	2
09063E	●	63	32	50	130		4	2
09063E-42	●	63	42	50	150		4	2
09080E	●	80	32	50	130		5	2
09080E-42	●	80	42	50	150		5	2


Body (Fine Pitch)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length		Number of Teeth	Fig
					LF			
DFCM 09032E	●	32	32	50	130		3	1
09040E	●	40	32	50	130		4	2
09050E	●	50	32	50	130		5	2
09050E-42	●	50	42	50	150		5	2
09063E	●	63	32	50	130		6	2
09063E-42	●	63	42	50	150		6	2
09080E	●	80	32	50	130		7	2
09080E-42	●	80	42	50	150		7	2

Inserts are sold separately.

Insert

Grade Classification	Coated Carbide										Corner Radius RE	Fig	
	Process	High-speed/Light Cutting	K	M	P		K	K		M			S
		Medium Cutting	K	M	P	M	K	K		M			S
	Roughing	K	M	P	M		K			S			
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300			
XNMM 060604PNER-L	●	●	—	●	●	●	—	●	—	●	0.4	1	
060608PNER-L	●	●	—	●	●	●	—	●	—	●	0.8	1	
XNMM 060604PNER-G	●	●	●	●	●	●	●	●	●	●	0.4	1	
060608PNER-G	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-G	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-G	●	●	●	●	●	●	●	●	●	●	1.6	1	
XNMM 060604PNER-GS	●	●	●	●	●	●	●	●	●	●	0.4	1	
060608PNER-GS	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-GS	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-GS	●	●	●	●	●	●	●	●	●	●	1.6	1	
XNMM 060608PNER-H	●	●	●	●	●	●	●	●	●	●	0.8	1	
060612PNER-H	●	●	●	●	●	●	●	●	●	●	1.2	1	
060616PNER-H	●	●	●	●	●	●	●	●	●	●	1.6	1	



Identification Code

DFC **M** **09** **025** **E**

Series Code Fine Pitch Insert Size Cutter Dia. Shank type

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Depth of Cut ap (mm)	Insert Grade
P	General Steel	180 to 280 HB	150 - 200 - 250	0.10 - 0.20 - 0.30	< 6	ACU2500
	Mild Steel	≤ 180HB	180 - 250 - 350	0.15 - 0.25 - 0.35	< 6	ACP200
	Die Steel	200 to 220 HB	100 - 150 - 200	0.10 - 0.18 - 0.25	< 4	ACP300
M	Stainless Steel	—	160 - 205 - 250	0.12 - 0.18 - 0.25	< 6	ACU2500
K	Cast Iron	250HB	100 - 175 - 250	0.10 - 0.20 - 0.30	< 6	ACK200
						ACK300
						XCU2500
						XCK2000
S	Exotic Alloy	—	30 - 50 - 80	0.10 - 0.20 - 0.30	< 6	ACU2500
						ACM200
						ACM300

For shoulder milling, the GS type breaker is recommended. Use at ae ≤ 50% of cutter diameter and fz ≤ 0.2mm/t.
 Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX03512IP	3.0 TRDR15IP	SUMI-P



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



■ Features

- **Excellent Machined Surface Quality**
Adopts ground type insert for high accuracy to realise excellent machined surface quality.
- **Cutting Edge Designed for High Cutting Edge Strength and Sharpness**
Adopts tangential insert and optimised cutting edge shape to achieve both high cutting edge strength and sharpness.
- **Wide Ranging Product Lineup**
An enhanced lineup of grades is available in addition to 2 types of insert sizes and 3 types of chipbreakers. Can be used for a wide variety of machining applications.
- **Applicable to Various Work Materials**
In addition to the general-purpose grade ACU2500, the new-generation coated carbide grades XCU2500/XCK2000 are now available.
Applicable to various work materials such as steel, stainless steel, cast iron, and exotic alloys.

■ Product Range (Face Mills)

Type	Cat. No.	Description	Dia. (mm)													Shape		
			ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100	ø125	ø160	ø200	ø250		ø315	
Shell	TSX 0800RS/LS	Standard Pitch					4	5	6	7								
	TSX 0800R/L	Standard Pitch								7								
	TSXF 0800RS/LS	Extra Fine Pitch					6	8	10	11								
	TSXF 0800R/L	Extra Fine Pitch								11								
	TSX 1300RS/LS	Standard Pitch					3	4	5	5	6	7	8	12	14	16		
	TSX 1300R/L	Standard Pitch								5	6	7	8	12	14	16		
	TSXM 1300RS/LS	Fine Pitch					4	5	6	7	8	10	12	16	20	24		
	TSXM 1300R/L	Fine Pitch								7	8	10	12	16	20	24		
	TSXF 1300RS/LS	Extra Fine Pitch					5	6	7	8	10	14	16					
	TSXF 1300R/L	Extra Fine Pitch								8	10	14	16					
Shank	TSX 0800E	Standard Pitch	2	2*	3*	3*	4	5	6	7								
	TSXF 0800E	Extra Fine Pitch		3	4	5	6	8	10	11								
	TSX 1300E	Standard Pitch			2	2	3	4	5	5								
	TSXM 1300E	Fine Pitch				3	4	5	6	7								
	TSXF 1300E	Extra Fine Pitch					5	6	7	8								





Number in ● shows the number of teeth Inch Bore *mark: Different diameter shanks in stock

■ Product Range (Repeaters)

Type	Cat. No.	Dia. (mm)									Shape			
		ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100	ø125				
Shell	TSXR 0800RS			2	3	3	4	5						
	TSXR 1300RS				2	3	3	4	4	5	5	6	7	
Shank	TSXR 0800E	1	2	2	3									
	TSXR 1300E				2	3								


Number in ● shows the number of teeth

■ **Shoulder Milling Precision** High accuracy insert and cutting edge shape optimised to realise excellent wall precision

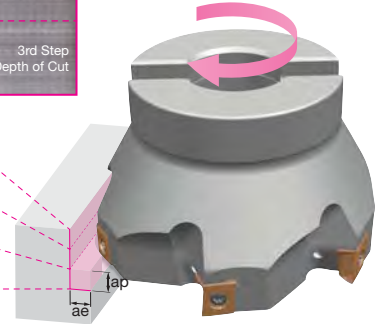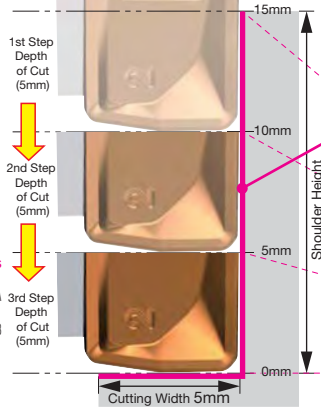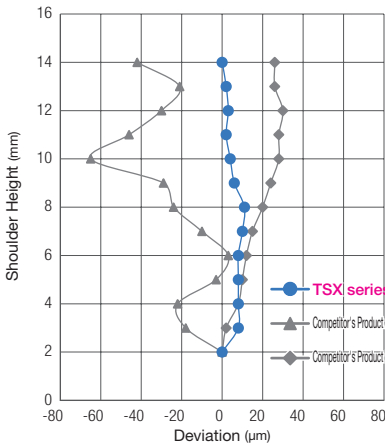

Machine: Vertical Machining Centre BT50, Work Material: S50C
 Tool: TSX 13100R, Insert: LNX 130608PNER-G (ACP200)
 Cutting Conditions: $vc = 200\text{m/min}$, $fz = 0.2\text{mm/t}$, $ap = 5\text{mm} \times 3 \text{ Passes}$, $ae = 5\text{mm}$, Dry

■ **Machined Surface Roughness** Cutting edge shape optimised to realise excellent machined surface roughness

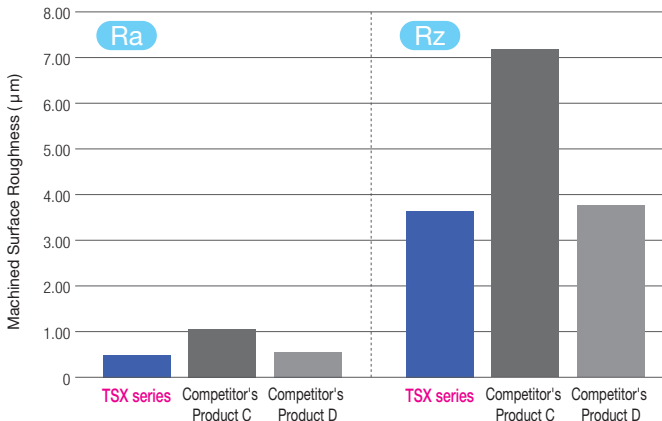


Machined Surface Comparison

TSX type
Without
Cloudiness



Competitor's
Product
Cloudy

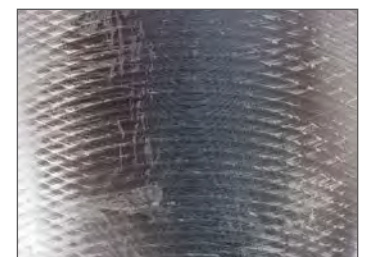


Machine: Vertical Machining Centre BT50, Work Material: S50C
 Tool: TSX 13100R, Insert: LNX 130608PNER-G (ACP200)
 Cutting Conditions: $vc = 200\text{m/min}$, $fz = 0.2\text{mm/t}$, $ap = 3\text{mm}$, $ae = 60\text{mm}$, Dry

■ **Cutting Edge Strength** TSX type has high cutting edge strength and enables high-efficiency machining

1 Pass = 300mm

Cutting Length	4 Passes	8 Passes	12 Passes
TSX series	Continued Machining Possible		
Competitor's Product E	Damage		
Competitor's Product F	Damage		





Machine: Vertical Machining Centre BT50, Work Material: S50C
 Tool: TSX 13100R, Insert: LNX 130608PNER-G (ACP200)
 Cutting Conditions: $vc = 150\text{m/min}$, $fz = 0.6\text{mm/t}$ (Accelerating), $ap = 3\text{mm}$, $ae = 40\text{mm}$, Dry

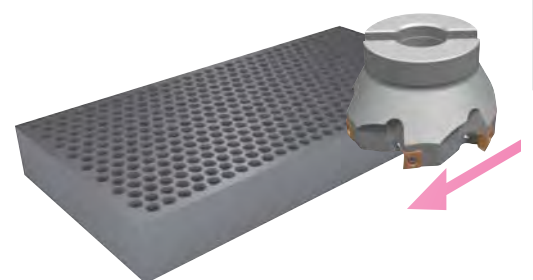

- Milling Cutters
- Face Milling
- Shoulder Milling
- High-Feed
- Multi-purpose
- Radius
- Radial/3D Profiling
- Side Cutters T-Slot Cutters
- Chamfering
- Non-Ferrous Metals
- Cast Iron, High-Speed

SEC-Sumi Dual Mill TSX series


Tool Life Excellent Wear Resistance Realises Stable Tool Life

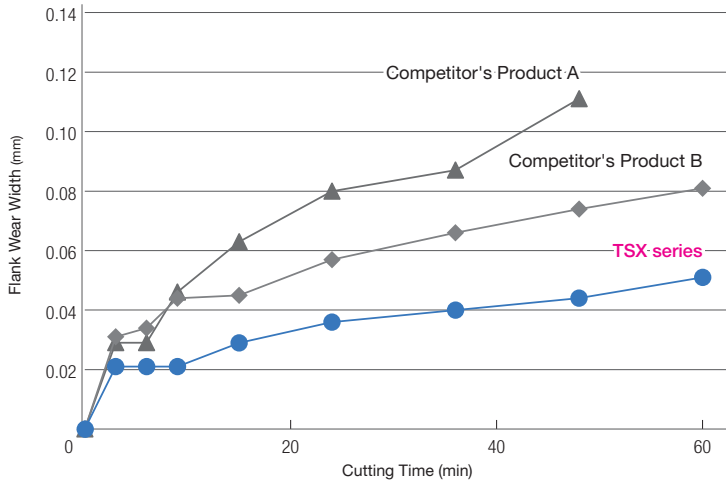


Machine: Vertical Machining Centre BT50, Work Material: S50C
 Tool: TSX 08025E, Insert: LNEX 080408PNER-G (ACP200)
 Cutting Conditions: $v_c = 200\text{m/min}$, $f_z = 0.1\text{mm/t}$, $a_p = 2\text{mm}$, $a_e = 5\text{mm}$, Dry

Applications


Face Milling




Shoulder Milling




Side Milling




Groove Milling




Hole Expansion Milling




Plunge Milling



Helical Milling



Ramping



Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling












Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


■ Chipbreaker Selection

Work Material	P M K S			N
Applications	Light Cutting, Low Rigidity Milling and Reduction of Burrs	General-purpose to Interrupted Milling	Heavy Cutting, Heavy Side Milling and Hardened Steel Milling	Non-Ferrous Metals
Features	Low Cutting Force	General-purpose type	High Strength type	High Rake type
Chipbreaker	L type	G type	H type	S type
				
LNEX08 type Cross Section			Not Available	
LNEX13 type Cross Section				

■ Product Range

Cat. No.	Corner Radius RE (mm)						
	0.4	0.8	1.2	1.6	2.0	2.4	3.2
LNEX 0804○○PNER/L-L	●	●	●	●	—	—	—
LNEX 0804○○PNER/L-G	●	●	●	●	—	—	—
LNEX 0804○○PNFR/L-S					—	—	—
LNEX 1306○○PNER/L-L	●	●	●	●	●	●	●
LNEX 1306○○PNER/L-G	●	●	●	●	●	●	●
LNEX 1306○○PNER-H	●	●	●	●	●	●	●
LNEX 1306○○PNFR/L-S							

■ Chipbreaker Selection Guide

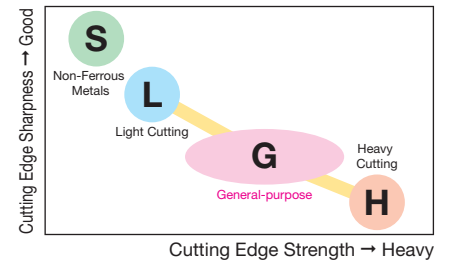

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

TSX(F) 08000R/L(S) type

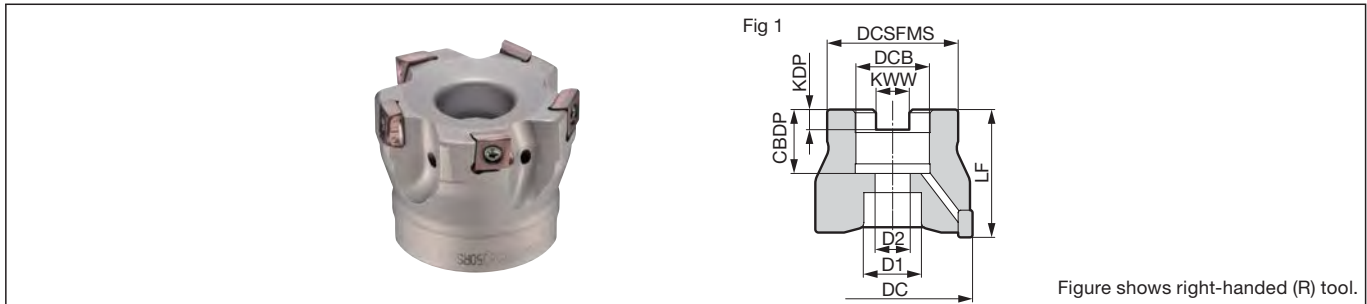



Figure shows right-handed (R) tool.

Body (Standard Pitch)

Dimensions (mm)

Cat. No.	Stock		Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
	R	L												
TSX 08040RS/LS	●		40	33	40	16	8.4	5.6	18	14	9	4	0.21	1
08050RS/LS	●		50	41	40	22	10.4	6.3	20	18	11	5	0.30	1
08063RS/LS	●		63	50	40	22	10.4	6.3	20	18	11	6	0.53	1
08080RS/LS	●		80	55	50	27	12.4	7.0	22	20	14	7	0.99	1
TSX 08080R/L	●		80	55	50	25.4	9.5	6.0	25	20	14	7	1.00	1

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Body (Extra Fine Pitch)

Dimensions (mm)

Cat. No.	Stock		Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
	R	L												
TSXF 08040RS/LS	●		40	33	40	16	8.4	5.6	18	14	9	6	0.21	1
08050RS/LS	●		50	41	40	22	10.4	6.3	20	18	11	8	0.31	1
08063RS/LS	●		63	50	40	22	10.4	6.3	20	18	11	10	0.54	1
08080RS/LS	●		80	55	50	27	12.4	7.0	22	20	14	11	0.97	1
TSXF 08080R/L	●		80	55	50	25.4	9.5	6.0	25	20	14	11	0.98	1

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0308IP	2.0 TRDR08IP	SUMI-P

Identification Code

TSX F 08 050 R S

Series Code Extra Insert Dia. R: Right- Metric
 Fine Pitch Size Bore
 L: Left-
 Hand

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC				
Process	High-speed/Light Cutting											Corner Radius RE	Fig		
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000		
LNX	080404PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	080408PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	080412PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	080416PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.6	1
LNX	080404PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	0.4	1
	080408PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	0.8	1
	080412PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	1.2	1
	080416PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	1.6	1
LNX	080402PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	080404PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	080408PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	080412PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
LNX	080416PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
	080404PNEL-L	—	—	—	●	—	—	—	—	—	—	—	—	0.4	2
	080408PNEL-L	—	—	—	●	—	—	—	—	—	—	—	—	0.8	2
	080412PNEL-L	—	—	—	●	—	—	—	—	—	—	—	—	1.2	2
LNX	080416PNEL-L	—	—	—	●	—	—	—	—	—	—	—	—	1.6	2
	080404PNEL-G	—	—	—	●	—	—	●	—	—	—	—	—	0.4	2
	080408PNEL-G	—	—	—	●	—	—	●	—	—	●	—	—	0.8	2
	080412PNEL-G	—	—	—	●	—	—	●	—	—	—	—	—	1.2	2
LNX	080416PNEL-G	—	—	—	●	—	—	●	—	—	—	—	—	1.6	2
	080402PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	2
	080404PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	2
	080408PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	2
LNX	080412PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	2
	080416PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	2

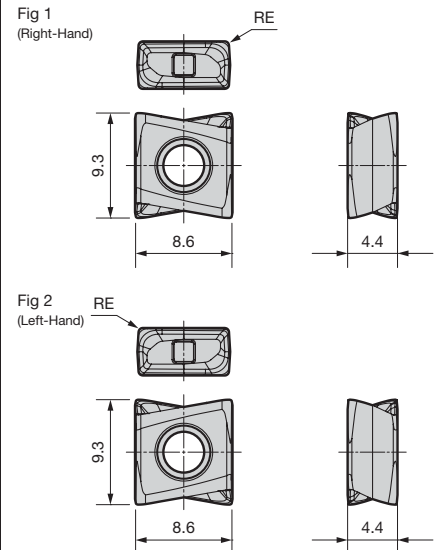

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	180 to 280HB	150 - 225 - 300	0.08 - 0.20 - 0.30	ACU2500 ACP100 ACP200 ACP300 XCU2500
		> 280HB	75 - 150 - 230	0.08 - 0.20 - 0.30	
M	Stainless Steel	180 to 280HB	100 - 175 - 250	0.08 - 0.15 - 0.25	ACU2500 ACM200 ACM300
		> 280HB	75 - 125 - 170	0.08 - 0.15 - 0.25	
K	Cast Iron/ Ductile Cast Iron	250HB	150 - 175 - 250	0.08 - 0.20 - 0.30	ACU2500 ACK200 ACK300 XCU2500 XCK2000
S	Exotic Alloy	—	30 - 60 - 90	0.05 - 0.10 - 0.15	ACU2500 ACM200 ACM300

Note · The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
· The above figures are guidelines for use with BT40 machine tools.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling



Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron,
High-Speed

TSX 13000R/L(S) type

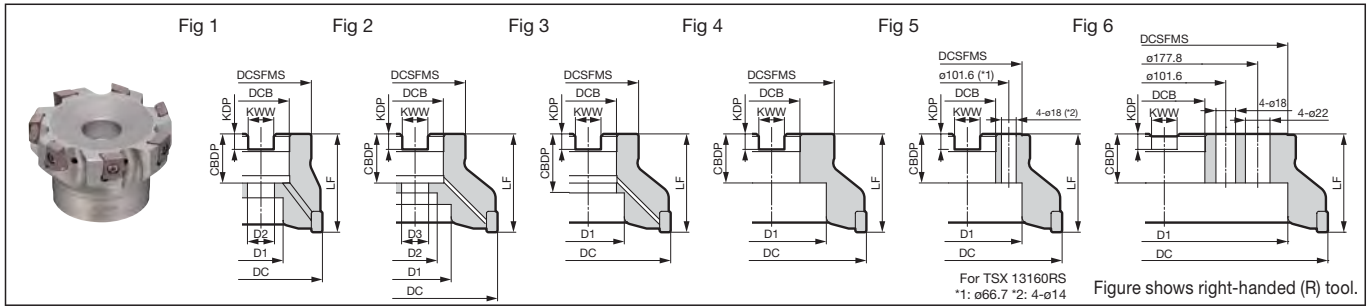

For TSX 13160RS
*1: ø106,7 *2: 4-ø14

Figure shows right-handed (R) tool.

Body (Standard Pitch)

Dimensions (mm)

Cat. No.	Stock		Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Bolt D3	Number of Teeth	Weight (kg)	Fig
	R	L													
TSX 13040RS/LS	●		40	33	40	16	8.4	5.6	18.0	14	9	—	3	0.20	1
13050RS/LS	●		50	41	40	22	10.4	6.3	20.0	18	11	—	4	0.30	1
13063RS/LS	●		63	50	40	22	10.4	6.3	20.0	18	11	—	5	0.50	1
13080RS/LS	●		80	55	50	27	12.4	7.0	22.0	20	14	—	5	0.92	1
13100RS/LS	●		100	70	50	32	14.4	8.0	32.0	46	—	—	6	1.35	3
13125RS/LS	●		125	80	63	40	16.4	9.0	29.0	52	29	—	7	2.55	1
13160RS/LS	●		160	130	63	40	16.4	9.0	29.0	90	—	—	8	4.97	5 ^{1/2}
13200RS/LS	●		200	160	63	60	25.7	14.0	35.0	135	—	—	12	6.20	5
13250RS/LS	●		250	180	63	60	25.7	14.0	35.0	160	—	—	14	9.35	5
13315RS/LS	●		315	240	63	60	25.7	14.0	35.0	230	—	—	16	16.42	6
TSX 13080R/L	●		80	55	50	25.4	9.5	6.0	25.0	20	14	—	5	0.93	1
13100R/L	●		100	70	63	31.75	12.7	8.0	32.0	46	27	18	6	1.88	2
13125R/L	●		125	80	63	38.1	15.9	10.0	35.5	55	30	—	7	2.61	1
13160R/L	●		160	100	63	50.8	19.1	11.0	38.0	72	—	—	8	4.18	4
13200R/L	●		200	160	63	47.625	25.4	14.0	35.0	135	—	—	12	6.36	5
13250R/L	●		250	180	63	47.625	25.4	14.0	35.0	160	—	—	14	9.60	5
13315R/L	●		315	240	63	47.625	25.4	14.0	35.0	230	—	—	16	16.68	6

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Identification Code

TSX 13 100 R S

Series Code Insert Size Dia. R: Right-Hand Metric Bore
L: Left-Hand


Parts

Applicable Cutter	Shim	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Anti-seizure Cream
					Handle Grip	Bit	
TSX 13040RS/LS							
TSX 13050RS/LS							
TSX 13063RS/LS							
TSX 13080RS/LS							
TSX 13100RS/LS							
TSX 13125RS/LS							
TSX 13160RS/LS							
TSX 13200RS/LS							
TSX 13250RS/LS							
TSX 13315RS/LS							
TSX 13080R/L							
TSX 13100R/L							
TSX 13125R/L							
TSX 13160R/L							
TSX 13200R/L							
TSX 13250R/L							
TSX 13315R/L							

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Corner Radius RE	Fig		
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000		
LNEX	130604PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.4	1
130632PNER-L	●	●		●	●	●	●	●	●	●	—	—	3.2	1	
LNEX	130604PNER-G	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-G	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-G	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-G	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-G	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-G	●	●		●	●	●	●	●	●	●	—	—	2.4	1
130632PNER-G	●	●		●	●	●	●	●	●	●	—	—	3.2	1	
LNEX	130604PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.4	1
130632PNER-H	●	●		●	●	●	●	●	●	●	—	—	3.2	1	
LNEX	130602PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	130604PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	130608PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	130612PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
	130616PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
	130620PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	2.0	1
130624PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	2.4	1	
130632PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	3.2	1	
LNEX	130604PNEL-L				●				●			—	—	0.4	2
	130608PNEL-L				●				●			—	—	0.8	2
	130612PNEL-L				●				●			—	—	1.2	2
	130616PNEL-L				●				●			—	—	1.6	2
	130620PNEL-L				●				●			—	—	2.0	2
	130624PNEL-L				●				●			—	—	2.4	2
130632PNEL-L				●				●			—	—	3.2	2	
LNEX	130604PNEL-G				●				●		●	—	—	0.4	2
	130608PNEL-G				●				●		●	—	—	0.8	2
	130612PNEL-G				●				●		●	—	—	1.2	2
	130616PNEL-G				●				●		●	—	—	1.6	2
	130620PNEL-G				●				●		●	—	—	2.0	2
	130624PNEL-G				●				●		●	—	—	2.4	2
130632PNEL-G				●				●		●	—	—	3.2	2	
LNEX	130602PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	2
	130604PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	2
	130608PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	2
	130612PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	2
	130616PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	2
	130620PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	2.0	2
130624PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	2.4	2	
130632PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	3.2	2	

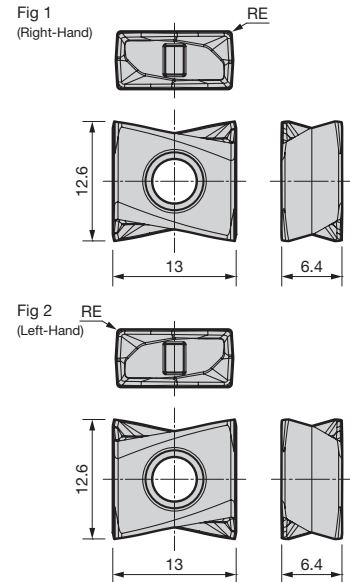

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
P	Carbon Steel	180 to 280HB	150 - 225 - 300	0.10 - 0.30	0.30 - 0.40	ACU2500 ACP100 ACP200 ACP300 XCU2500	
		> 280HB	75 - 150 - 230	0.10 - 0.30	0.30 - 0.40		
M	Stainless Steel	220 to 280HB	90 - 135 - 180	0.10 - 0.20	0.30 - 0.30	ACU2500 ACM200 ACM300	
		> 280HB	75 - 125 - 170	0.10 - 0.20	0.30 - 0.30		

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
K	Cast Iron/ Ductile Cast Iron	250HB	150 - 175 - 250	0.10 - 0.30	0.30 - 0.40	ACU2500 ACK200 ACK300 XCU2500 XCK2000	
S	Exotic Alloy	—	30 - 60 - 90	0.10 - 0.15	0.20 - 0.20	ACU2500 ACM200 ACM300	

Note - The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
- The above figures are guidelines for use with BT50 machine tools.

● mark: Standard stocked item (new product/expanded item)

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling



Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

TSXM 13000R/L(S) type

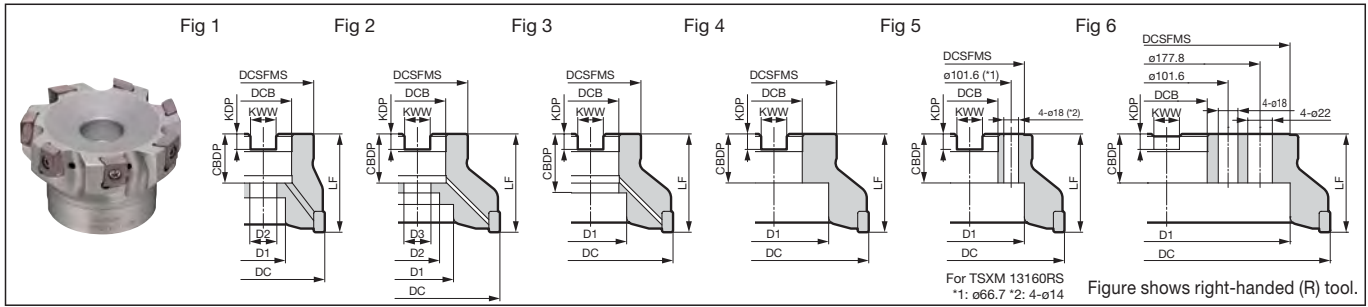

Body (Fine Pitch)

Cat. No.	Stock		Dimensions (mm)												
	R	L	Dia. DC	DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Bolt D3	Number of Teeth	Weight (kg)	Fig
TSXM 13040RS/LS	●		40	33	40	16	8.4	5.6	18.0	14	9	—	4	0.19	1
13050RS/LS	●		50	41	40	22	10.4	6.3	20.0	18	11	—	5	0.28	1
13063RS/LS	●		63	50	40	22	10.4	6.3	20.0	18	11	—	6	0.50	1
13080RS/LS	●		80	55	50	27	12.4	7.0	22.0	20	14	—	7	0.92	1
13100RS/LS	●		100	70	50	32	14.4	8.0	32.0	46	—	—	8	1.36	3
13125RS/LS	●		125	80	63	40	16.4	9.0	29.0	52	29	—	10	2.57	1
13160RS/LS	●		160	130	63	40	16.4	9.0	29.0	90	—	—	12	5.02	5 ¹ / ₂
13200RS/LS	●		200	160	63	60	25.7	14.0	35.0	135	—	—	16	6.32	5
13250RS/LS	●		250	180	63	60	25.7	14.0	35.0	160	—	—	20	9.42	5
13315RS/LS	●		315	240	63	60	25.7	14.0	35.0	230	—	—	24	16.37	6
TSXM 13080R/L	●		80	55	50	25.4	9.5	6.0	25.0	20	14	—	7	0.93	1
13100R/L	●		100	70	63	31.75	12.7	8.0	32.0	46	27	18	8	1.90	2
13125R/L	●		125	80	63	38.1	15.9	10.0	35.5	55	30	—	10	2.62	1
13160R/L	●		160	100	63	50.8	19.1	11.0	38.0	72	—	—	12	4.22	4
13200R/L	●		200	160	63	47.625	25.4	14.0	35.0	135	—	—	16	6.48	5
13250R/L	●		250	180	63	47.625	25.4	14.0	35.0	160	—	—	20	9.68	5
13315R/L	●		315	240	63	47.625	25.4	14.0	35.0	230	—	—	24	16.63	6

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Identification Code

TSX M 13 100 R S

Series Code Fine Pitch Insert Size Dia. R: Right-Hand Metric L: Left-Hand Bore


Parts

Applicable Cutter	Shim	Flat Insert Screw	Integrated Wrench	Detachable Wrench		Anti-seizure Cream
				Handle Grip	Bit	
TSXM 13040RS/LS						
TSXM 13050RS/LS						
TSXM 13063RS/LS						
TSXM 13080RS/LS	—			HPS1015	TRB15IP	
TSXM 13100RS/LS						
TSXM 13125RS/LS						
TSXM 13160RS/LS						
TSXM 13200RS/LS						
TSXM 13250RS/LS	TSXS13R/L	BFTX03510IP	3.0	TRDR15IP	—	SUMI-P
TSXM 13315RS/LS						
TSXM 13080R/L						
TSXM 13100R/L				HPS1015	TRB15IP	
TSXM 13125R/L						
TSXM 13160R/L						
TSXM 13200R/L						
TSXM 13250R/L	TSXS13R/L			TRDR15IP	—	
TSXM 13315R/L						

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC				
Process	High-speed/Light Cutting											Corner Radius RE	Fig		
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000		
LNEX	130604PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.4	1
	130632PNER-L	●	●		●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130604PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	2.4	1
	130632PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130604PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.4	1
	130632PNER-H	●	●		●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130602PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	130604PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	130608PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	130612PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
	130616PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
	130620PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	2.0	1
	130624PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	2.4	1
	130632PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	3.2	1
LNEX	130604PNEL-L				●			●				—	—	0.4	2
	130608PNEL-L				●			●				—	—	0.8	2
	130612PNEL-L				●			●				—	—	1.2	2
	130616PNEL-L				●			●				—	—	1.6	2
	130620PNEL-L				●			●				—	—	2.0	2
	130624PNEL-L				●			●				—	—	2.4	2
	130632PNEL-L				●			●				—	—	3.2	2
LNEX	130604PNEL-G				●			●		●		—	—	0.4	2
	130608PNEL-G				●			●		●		—	—	0.8	2
	130612PNEL-G				●			●		●		—	—	1.2	2
	130616PNEL-G				●			●		●		—	—	1.6	2
	130620PNEL-G				●			●		●		—	—	2.0	2
	130624PNEL-G				●			●		●		—	—	2.4	2
	130632PNEL-G				●			●		●		—	—	3.2	2
LNEX	130602PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	2
	130604PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	2
	130608PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	2
	130612PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	2
	130616PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	2
	130620PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	2.0	2
	130624PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	2.4	2
	130632PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	3.2	2

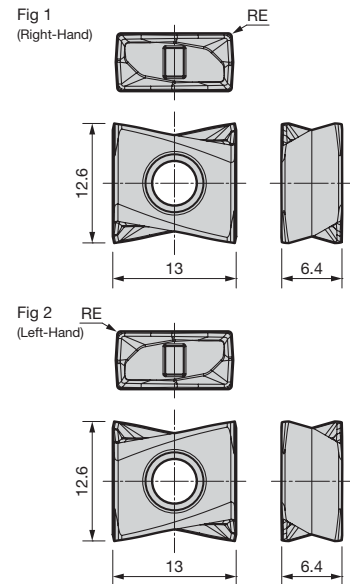

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
P	Carbon Steel	180 to 280HB	150 - 225 - 300	0.10 - 0.30	0.40	ACU2500 ACP100 ACP200 ACP300 XCU2500	
		> 280HB	75 - 150 - 230	0.10 - 0.30	0.40		
M	Alloy Steel	180 to 280HB	100 - 175 - 250	0.10 - 0.25	0.35	ACU2500 ACM200 ACM300	
		> 280HB	75 - 125 - 170	0.10 - 0.20	0.30		

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
K	Cast Iron/ Ductile Cast Iron	250HB	150 - 175 - 250	0.10 - 0.30	0.40	ACU2500 ACK200 ACK300 XCU2500 XCK2000	
S	Exotic Alloy	—	30 - 60 - 90	0.10 - 0.15	0.20	ACU2500 ACM200 ACM300	

Note · The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
· The above figures are guidelines for use with BT50 machine tools.

● mark: Standard stocked item (new product/expanded item)

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling



Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

TSXF 13000R/L(S) type

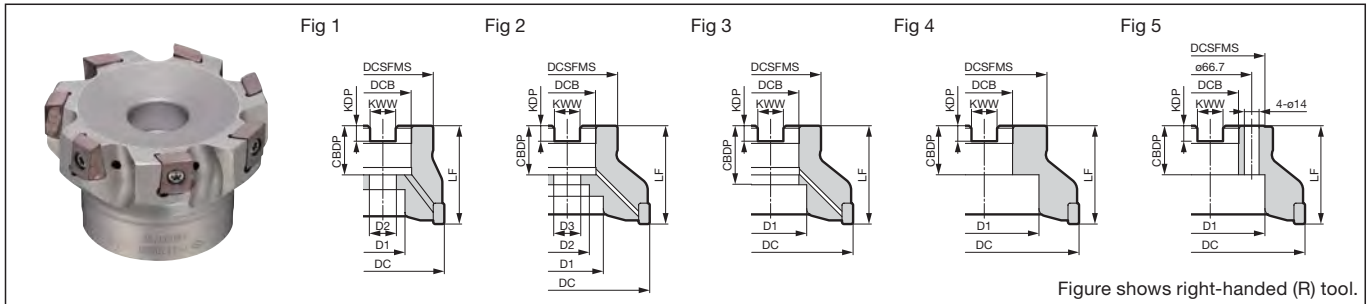

Body (Extra Fine Pitch)

Dimensions (mm)

Cat. No.	Stock		Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Bolt D3	Number of Teeth	Weight (kg)	Fig
	R	L													
TSXF 13040RS/LS	●		40	33	40	16	8.4	5.6	18.0	14	9	—	5	0.18	1
13050RS/LS	●		50	41	40	22	10.4	6.3	20.0	18	11	—	6	0.29	1
13063RS/LS	●		63	50	40	22	10.4	6.3	20.0	18	11	—	7	0.50	1
13080RS/LS	●		80	55	50	27	12.4	7.0	22.0	20	14	—	8	0.92	1
13100RS/LS	●		100	70	50	32	14.4	8.0	32.0	46	—	—	10	1.34	3
13125RS/LS	●		125	80	63	40	16.4	9.0	29.0	52	29	—	14	2.58	1
13160RS/LS	●		160	130	63	40	16.4	9.0	29.0	90	—	—	16	5.08	5
TSXF 13080R/L	●		80	55	50	25.4	9.5	6.0	25.0	20	14	—	8	0.93	1
13100R/L	●		100	70	63	31.75	12.7	8.0	32.0	46	27	18	10	1.88	2
13125R/L	●		125	80	63	38.1	15.9	10.0	35.5	55	30	—	14	2.60	1
13160R/L	●		160	100	63	50.8	19.1	11.0	38.0	72	—	—	16	4.28	4

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Identification Code

TSX F 13 100 R S

Series Code Extra Insert Size Dia. R: Right-Hand Bore L: Left-Hand
 Fine Pitch

Parts

Applicable Cutter	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Anti-seizure Cream
	Flat Insert Screw	(N·m)		Handle Grip	Bit	
TSXF 13040RS/LS	BFTX03510IP	3.0				
TSXF 13050RS/LS						
TSXF 13063RS/LS						
TSXF 13080RS/LS						
TSXF 13100RS/LS						
TSXF 13125RS/LS						
TSXF 13160RS/LS						
TSXF 13080R/L						
TSXF 13100R/L						
TSXF 13125R/L						
TSXF 13160R/L						

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Corner Radius RE	Fig		
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000		
LNEX	130604PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.4	1
	130632PNER-L	●	●		●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130604PNER-G	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-G	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-G	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-G	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-G	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-G	●	●		●	●	●	●	●	●	●	—	—	2.4	1
	130632PNER-G	●	●		●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130604PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.4	1
	130632PNER-H	●	●		●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130602PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	130604PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	130608PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	130612PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
	130616PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
	130620PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	2.0	1
	130624PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	2.4	1
130632PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	3.2	1	
LNEX	130604PNEL-L				●				●			—	—	0.4	2
	130608PNEL-L				●				●			—	—	0.8	2
	130612PNEL-L				●				●			—	—	1.2	2
	130616PNEL-L				●				●			—	—	1.6	2
	130620PNEL-L				●				●			—	—	2.0	2
	130624PNEL-L				●				●			—	—	2.4	2
	130632PNEL-L				●				●			—	—	3.2	2
LNEX	130604PNEL-G				●				●		●	—	—	0.4	2
	130608PNEL-G				●				●		●	—	—	0.8	2
	130612PNEL-G				●				●		●	—	—	1.2	2
	130616PNEL-G				●				●		●	—	—	1.6	2
	130620PNEL-G				●				●		●	—	—	2.0	2
	130624PNEL-G				●				●		●	—	—	2.4	2
	130632PNEL-G				●				●		●	—	—	3.2	2
LNEX	130602PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	2
	130604PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	2
	130608PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	2
	130612PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	2
	130616PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	2
	130620PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	2.0	2
	130624PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	2.4	2
130632PNFL-S	—	—	—	—	—	—	—	—	—	—	—	—	3.2	2	

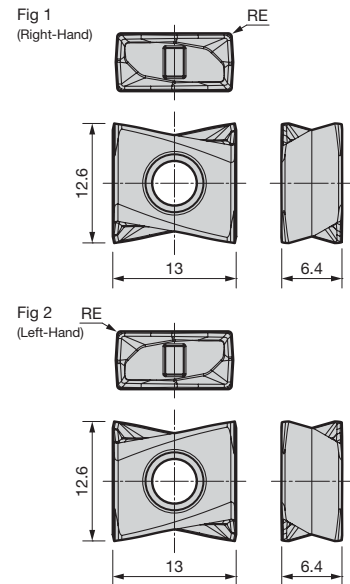

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
P	Carbon Steel	180 to 280HB	150 - 225 - 300	0.10 - 0.30	0.30 - 0.40	ACU2500 ACP100	
		> 280HB	75 - 150 - 230	0.10 - 0.30	0.30 - 0.40	ACP200	
M	Alloy Steel	180 to 280HB	100 - 175 - 250	0.10 - 0.25	0.35	ACP300 XCU2500	
		> 280HB	90 - 135 - 180	0.10 - 0.20	0.30	ACU2500 ACM200 ACM300	

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
K	Cast Iron/ Ductile Cast Iron	250HB	150 - 175 - 250	0.10 - 0.30	0.40	ACU2500 ACK200 ACK300 XCU2500 XCK2000	
S	Exotic Alloy	—	30 - 60 - 90	0.10 - 0.15	0.20	ACU2500 ACM200 ACM300	

Note · The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
· The above figures are guidelines for use with BT50 machine tools.

● mark: Standard stocked item (new product/expanded item)

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling


Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

TSX(F) 08000E type

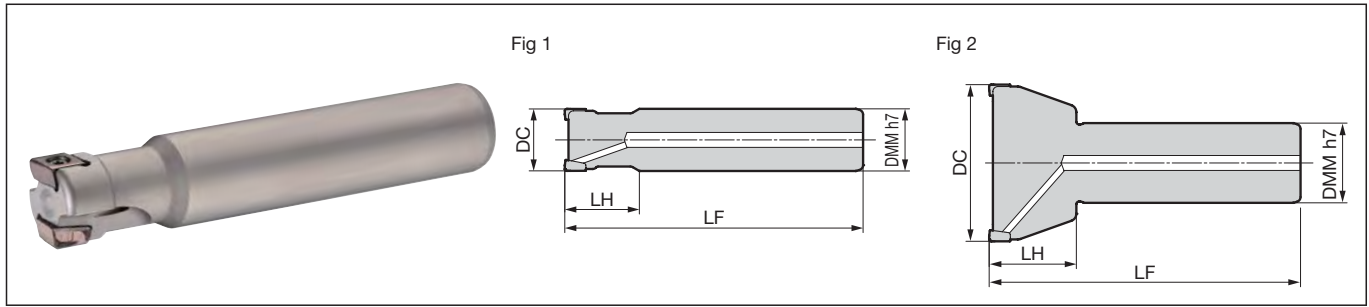

Body (Standard Pitch)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank Dia.		Head LH	Overall Length		Number of Teeth	Weight (kg)	Fig
			DMM	DMM		LF	LF			
TSX 08016E	●	16	16	16	25	100	100	2	0.13	1
08020E	●	20	20	20	30	110	110	2	0.22	1
08020E-16	●	20	16	16	30	110	110	2	0.15	2
08025E	●	25	25	25	30	120	120	3	0.40	1
08025E-20	●	25	20	20	30	120	120	3	0.26	2
08032E	●	32	32	32	30	120	120	3	0.67	1
08032E-25	●	32	25	25	30	120	120	3	0.43	2
08040E	●	40	32	32	30	120	120	4	0.72	2
08050E	●	50	32	32	30	120	120	5	0.85	2
08063E	●	63	32	32	35	125	125	6	1.09	2
08080E	●	80	32	32	35	125	125	7	1.44	2

Inserts are sold separately.

Body (Extra Fine Pitch)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank Dia.		Head LH	Overall Length		Number of Teeth	Weight (kg)	Fig
			DMM	DMM		LF	LF			
TSXF 08020E	●	20	20	20	30	110	110	3	0.22	1
08025E	●	25	25	25	30	120	120	4	0.40	1
08032E	●	32	32	32	30	120	120	5	0.67	1
08040E	●	40	32	32	30	120	120	6	0.73	2
08050E	●	50	32	32	30	120	120	8	0.85	2
08063E	●	63	32	32	35	125	125	10	1.10	2
08080E	●	80	32	32	35	125	125	11	1.42	2

Inserts are sold separately.

Identification Code

TSX F 08 032 E (-25)

Series Code Extra Insert Size Dia. Shank type Shank Dia.

Fine Pitch

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
	TSX 08016E, TSX 08020E, TSXF 08020E TSX 08025E to 80E, TSXF 08025E to 80E	 BFTX0306IP BFTX0308IP	 2.0 TRDR08IP

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals


Cast Iron, High-Speed

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC				
Process	High-speed/Light Cutting	P S	K M	P M			K	K		M S		N			
	Medium Cutting	P S	K M	P M	P M		K	K		M S	N	N			
	Roughing	P S		P M	P M				K		M S				
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000	Corner Radius RE	Fig
LNEX	080404PNER-L	●	●		●	●	●	●	●	●	●			0.4	1
	080408PNER-L	●	●		●	●	●	●	●	●	●			0.8	1
	080412PNER-L	●	●		●	●	●	●	●	●	●			1.2	1
	080416PNER-L	●	●		●	●	●	●	●	●	●			1.6	1
LNEX	080404PNER-G	●	●	●	●	●	●	●	●	●	●			0.4	1
	080408PNER-G	●	●	●	●	●	●	●	●	●	●			0.8	1
	080412PNER-G	●	●	●	●	●	●	●	●	●	●			1.2	1
	080416PNER-G	●	●	●	●	●	●	●	●	●	●			1.6	1
LNEX	080402PNFR-S	—	—	—	—	—	—	—	—	—	—			0.2	1
	080404PNFR-S	—	—	—	—	—	—	—	—	—	—			0.4	1
	080408PNFR-S	—	—	—	—	—	—	—	—	—	—			0.8	1
	080412PNFR-S	—	—	—	—	—	—	—	—	—	—			1.2	1
	080416PNFR-S	—	—	—	—	—	—	—	—	—	—			1.6	1

Fig 1 (Right-Hand)

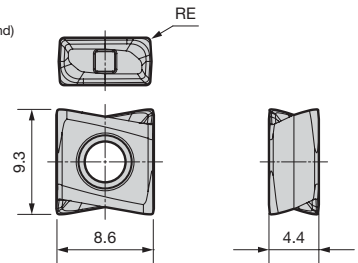

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	180 to 280HB	150 - 225 - 300	0.08 - 0.20 - 0.30	ACU2500 ACP100 ACP200 ACP300 XCU2500
		> 280HB	75 - 150 - 230	0.08 - 0.20 - 0.30	
M	Stainless Steel	220 to 280HB	90 - 135 - 180	0.08 - 0.15 - 0.25	ACU2500 ACM200 ACM300
		> 280HB	75 - 125 - 170	0.08 - 0.15 - 0.25	
K	Cast Iron/ Ductile Cast Iron	250HB	150 - 175 - 250	0.08 - 0.20 - 0.30	ACU2500 ACK200 ACK300 XCU2500 XCK2000
S	Exotic Alloy	—	30 - 60 - 90	0.05 - 0.10 - 0.15	ACU2500 ACM200 ACM300

Note · The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
· The above figures are guidelines for use with BT40 machine tools.

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

TSX(M/F) 13000E type




Rake Angle	Radial	-31 to -15°	12mm 90°
	Axial	-6°	

Face Milling

Shoulder Milling

Groove Milling

Side Milling

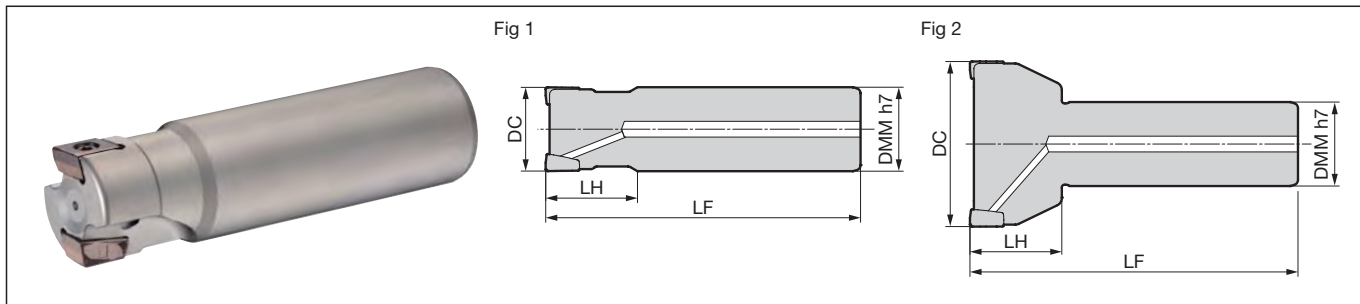

Body (Standard Pitch)

Dimensions (mm)

Metric	Cat. No.	Stock	Dia. DC	Shank Dia. DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
		TSX 13025E	●	25	25	35	120	2	0.38
	13032E	●	32	32	35	120	2	0.66	1
	13040E	●	40	32	30	120	3	0.71	2
	13050E	●	50	32	30	120	4	0.81	2
	13063E	●	63	32	35	125	5	1.08	2
	13080E	●	80	32	35	125	5	1.40	2

Inserts are sold separately.

Body (Fine Pitch)

Dimensions (mm)

Metric	Cat. No.	Stock	Dia. DC	Shank Dia. DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
		TSXM 13032E	●	32	32	35	120	3	0.65
	13040E	●	40	32	30	120	4	0.71	2
	13050E	●	50	32	30	120	5	0.80	2
	13063E	●	63	32	35	125	6	1.07	2
	13080E	●	80	32	35	125	7	1.41	2

Inserts are sold separately.

Body (Extra Fine Pitch)

Dimensions (mm)

Metric	Cat. No.	Stock	Dia. DC	Shank Dia. DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
		TSXF 13040E	●	40	32	30	120	5	0.70
	13050E	●	50	32	30	120	6	0.80	2
	13063E	●	63	32	35	125	7	1.07	2
	13080E	●	80	32	35	125	8	1.42	2

Inserts are sold separately.

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX03510IP	3.0	TRDR15IP SUMI-P

Identification Code

TSX M 13 050 E

Series Code M: Fine Pitch Insert Size Dia. Shank type

F: Extra Fine Pitch

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals


Cast Iron, High-Speed

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Corner Radius RE	Fig		
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000		
LNEX	130604PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.4	1
LNEX	130632PNER-L	●	●		●	●	●	●	●	●	—	—	3.2	1	
LNEX	130604PNER-G	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-G	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-G	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-G	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-G	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-G	●	●		●	●	●	●	●	●	●	—	—	2.4	1
LNEX	130632PNER-G	●	●		●	●	●	●	●	●	—	—	3.2	1	
LNEX	130604PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.4	1
LNEX	130632PNER-H	●	●		●	●	●	●	●	●	—	—	3.2	1	
LNEX	130602PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	130604PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	130608PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	130612PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
	130616PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
	130620PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	2.0	1
LNEX	130624PNFR-S	—	—	—	—	—	—	—	—	—	—	—	2.4	1	
LNEX	130632PNFR-S	—	—	—	—	—	—	—	—	—	—	—	3.2	1	

Fig 1 (Right-Hand)



Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	180 to 280HB	150 - 225 - 300	0.10 - 0.30 - 0.40	ACU2500 ACP100
		> 280HB	75 - 150 - 230	0.10 - 0.30 - 0.40	ACP200 ACP300 XCU2500
M	Stainless Steel	220 to 280HB	90 - 135 - 180	0.10 - 0.20 - 0.30	ACU2500 ACM200 ACM300
		> 280HB	75 - 125 - 170	0.10 - 0.20 - 0.30	
K	Cast Iron/ Ductile Cast Iron	250HB	150 - 175 - 250	0.10 - 0.30 - 0.40	ACU2500 ACK200 ACK300 XCU2500 XCK2000
S	Exotic Alloy	—	30 - 60 - 90	0.10 - 0.15 - 0.20	ACU2500 ACM200 ACM300

Note · The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
· The above figures are guidelines for use with BT50 machine tools.


TSXR 08000RS type



Rake Angle	Radial	-20 to -15°	34 to 60mm 90°		
	Axial	-6 to -3°			

Milling Cutters

H

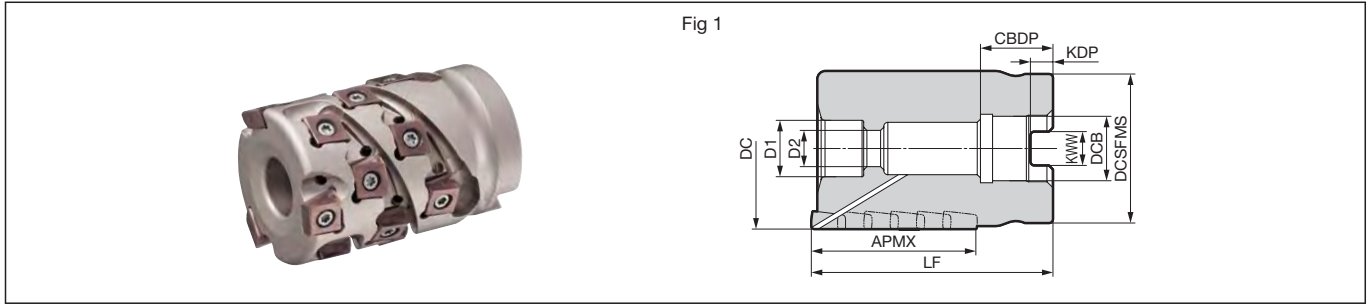

Face Milling

Shoulder Milling

Body

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Total No. of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
TSXR 08032RS3416Z02	●	32	34	33	55	16	8.4	5.6	18.0	14	9	10	5	2	0.17	1
08040RS4016Z03	●	40	40	37	60	16	8.4	5.6	18.0	14	9	18	6	3	0.32	1
08050RS5422Z03	●	50	54	47	75	22	10.4	6.3	20.0	18	11	24	8	3	0.70	1
08050RS5422Z04	●	50	54	47	75	22	10.4	6.3	20.0	18	11	32	8	4	0.68	1
08063RS6027Z05	●	63	60	60	80	27	12.4	7.0	22.0	20	14	45	9	5	1.25	1

Inserts are sold separately.

High-Feed

Multi-purpose

Identification Code

TSXR 08 050 R S 54 22 Z03

Series Code Insert Size Dia. Right Hand Metric Bore Max. Depth of Cut Mounting Hole Diameter Effective No. of Teeth

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


Parts

Applicable Cutter	Flat Insert Screw	Wrench	Bolt	Anti-seizure Cream
TSXR 08032RS3416Z02	BFTX0308IP	TRDR08IP	BX0845	SUMI-P
TSXR 08040RS4016Z03			BX0850	
TSXR 08050RS5422Z03			BX1060	
TSXR 08050RS5422Z04				
TSXR 08063RS6027Z05			BX1265	

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Corner Radius RE	Fig		
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000		
LNEX	080404PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	080408PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	080412PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	080416PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.6	1
LNEX	080404PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	0.4	1
	080408PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	0.8	1
	080412PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	1.2	1
LNEX	080416PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	1.6	1
	080402PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	080404PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	080408PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
LNEX	080412PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
	080416PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1

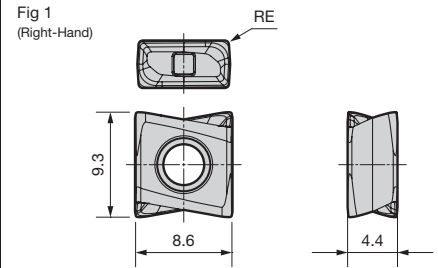

Use peripheral inserts with RE of 0.8mm or less from the second step and above.

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	180 to 280HB	110 - 200 - 280	0.08 - 0.20 - 0.30	ACU2500 ACP100
		> 280HB	70 - 135 - 200	0.08 - 0.20 - 0.30	ACP200 ACP300 XCU2500
M	Stainless Steel	220 to 280HB	90 - 135 - 180	0.08 - 0.15 - 0.25	ACU2500 ACM200 ACM300
		> 280HB	70 - 115 - 160	0.08 - 0.15 - 0.25	
K	Cast Iron/ Ductile Cast Iron	250HB	125 - 175 - 225	0.08 - 0.20 - 0.30	ACU2500 ACK200 ACK300 XCU2500 XCK2000
S	Exotic Alloy	—	30 - 60 - 90	0.05 - 0.10 - 0.15	ACU2500 ACM200 ACM300

- Note**
- The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
 - The above figures are guidelines for use with BT50 machine tools.
 - The above are the recommended cutting conditions for ae = diameter DC 20% or less.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


TSXR 13000RS type



Rake Angle	Radial	-23 to -15°	41 to 60 mm 90°		
	Axial	-6 to -3°			

Milling Cutters

H

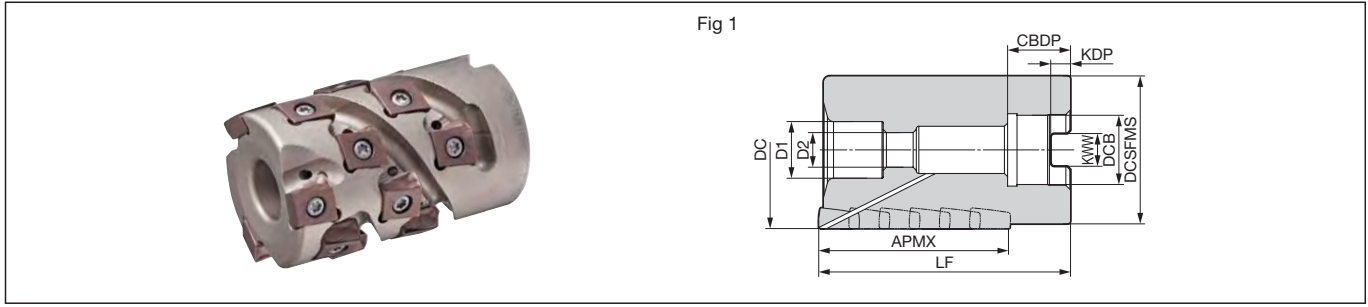

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Body

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Total No. of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
TSXR 13040RS4116Z02	●	40	41	37	60	16	8.4	5.6	18.0	14	9	8	4	2	0.31	1
13050RS6022Z03	●	50	60	47	80	22	10.4	6.3	20.0	18	11	18	6	3	0.66	1
13063RS5027Z03	●	63	50	60	75	27	12.4	7.0	22.0	20	14	15	5	3	1.12	1
13063RS6027Z04	●	63	60	60	80	27	12.4	7.0	22.0	20	14	24	6	4	1.15	1
13080RS6032Z04	●	80	60	77	80	32	14.4	8.0	26.0	25	18	24	6	4	2.06	1
13080RS6032Z05	●	80	60	77	80	32	14.4	8.0	26.0	25	18	30	6	5	2.04	1
13100RS6040Z05	●	100	60	88	85	40	16.4	9.0	29.0	32	21	30	6	5	3.45	1
13100RS6040Z06	●	100	60	88	85	40	16.4	9.0	29.0	32	21	36	6	6	3.44	1
13125RS6040Z07	●	125	60	100	85	40	16.4	9.0	29.0	32	21	42	6	7	5.63	1

Inserts are sold separately.

Identification Code

TSXR 13 050 R S 60 22 Z03

Series Code Insert Size Dia. Right Hand Metric Bore Max. Depth of Cut Mounting Hole Diameter Effective No. of Teeth

Parts


Applicable Cutter	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Bolt	Anti-seizure Cream
				Handle Grip	Bit		
TSXR 13040RS4116Z02	BFTX03510IP	3.0	—	HPS1015	TRB15IP	BX0850	SUMI-P
TSXR 13050RS6022Z03						BX1060	
TSXR 13063RS5027Z03						BX1260	
TSXR 13063RS6027Z04						BX1265	
TSXR 13080RS6032Z04			TRDR15IP	—	—	BX1660	
TSXR 13080RS6032Z05						BX2065	
TSXR 13100RS6040Z05							
TSXR 13100RS6040Z06							
TSXR 13125RS6040Z07							

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Corner Radius RE	Fig		
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000	Corner Radius RE	Fig
LNEX	130604PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-L	●	●		●	●	●	●	●	●	●	—	—	2.4	1
LNEX	130632PNER-L	●	●		●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130604PNER-G	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-G	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-G	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-G	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-G	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-G	●	●		●	●	●	●	●	●	●	—	—	2.4	1
LNEX	130632PNER-G	●	●		●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130604PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	130608PNER-H	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	130612PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	130616PNER-H	●	●		●	●	●	●	●	●	●	—	—	1.6	1
	130620PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.0	1
	130624PNER-H	●	●		●	●	●	●	●	●	●	—	—	2.4	1
LNEX	130632PNER-H	●	●		●	●	●	●	●	●	●	—	—	3.2	1
LNEX	130602PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	130604PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	130608PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	130612PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
	130616PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1
	130620PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	2.0	1
LNEX	130624PNFR-S	—	—	—	—	—	—	—	—	—	—	—	2.4	1	
LNEX	130632PNFR-S	—	—	—	—	—	—	—	—	—	—	—	3.2	1	

Fig 1 (Right-Hand)



Use peripheral inserts with RE of 0.8mm or less from the second step and above.

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	180 to 280HB	110 - 200 - 280	0.10 - 0.20 - 0.30	ACU2500 ACP100
		> 280HB	70 - 135 - 200	0.10 - 0.20 - 0.30	ACP200 ACP300 XCU2500
M	Alloy Steel	180 to 280HB	90 - 155 - 220	0.10 - 0.15 - 0.25	ACU2500 ACM200 ACM300
		220 to 280HB	90 - 135 - 180	0.10 - 0.15 - 0.25	
K	Stainless Steel	> 280HB	70 - 115 - 160	0.10 - 0.15 - 0.25	
		Cast Iron/ Ductile Cast Iron	250HB	125 - 175 - 225	0.10 - 0.20 - 0.30
S	Exotic Alloy	—	30 - 60 - 90	0.05 - 0.10 - 0.15	ACU2500 ACM200 ACM300

- Note**
- The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
 - The above figures are guidelines for use with BT50 machine tools.
 - The above are the recommended cutting conditions for ae = diameter DC 20% or less.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous Metals


Cast Iron,
High-Speed

TSXR 08000E type




Rake Angle	Radial	-33 to -18°
	Axial	-6° to -3°

21 to 40mm 90°



Milling Cutters

H

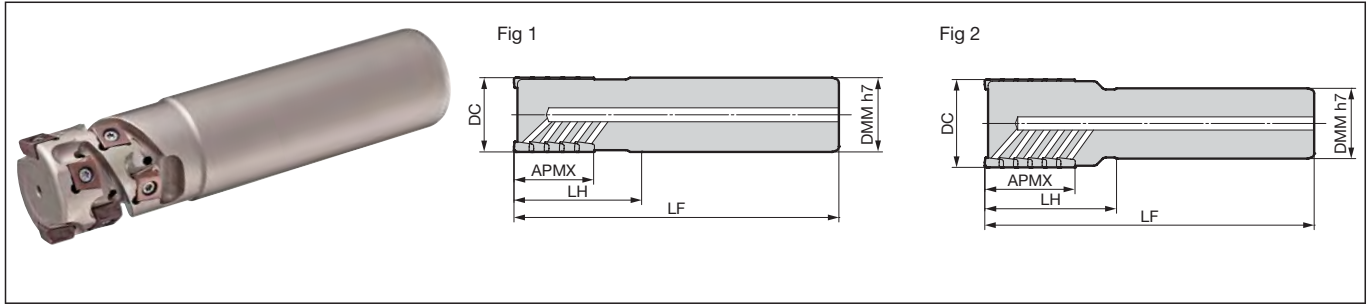

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Body

Dimensions (mm)

Metric	Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank Dia. DMM	Head LH	Overall Length LF	Total No. of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
		TSXR 08020E2120Z01	●	20	21	20	30	110	3	3	1	0.22
	08025E2725Z02	●	25	27	25	35	125	8	4	2	0.39	1
	08032E3432Z02	●	32	34	32	50	140	10	5	2	0.74	1
	08040E4032Z03	●	40	40	32	60	150	18	6	3	0.92	2

Inserts are sold separately.

Identification Code

TSXR 08 025 E 27 25 Z02

Series Code Insert Size Dia. Shank type Max. Depth of Cut Shank Dia. Effective No. of Teeth


Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0308IP	2.0	TRDR08IP SUMI-P

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Corner Radius RE	Fig		
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000		
LNEX	080404PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.4	1
	080408PNER-L	●	●		●	●	●	●	●	●	●	—	—	0.8	1
	080412PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.2	1
	080416PNER-L	●	●		●	●	●	●	●	●	●	—	—	1.6	1
LNEX	080404PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	0.4	1
	080408PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	0.8	1
	080412PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	1.2	1
	080416PNER-G	●	●	●	●	●	●	●	●	●	●	—	—	1.6	1
LNEX	080402PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.2	1
	080404PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.4	1
	080408PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	0.8	1
	080412PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.2	1
	080416PNFR-S	—	—	—	—	—	—	—	—	—	—	—	—	1.6	1

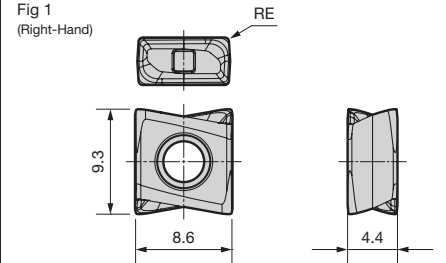

Use peripheral inserts with RE of 0.8mm or less from the second step and above.

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	180 to 280HB	110 - 200 - 280	0.08 - 0.20 - 0.30	ACU2500 ACP100
		> 280HB	70 - 135 - 200	0.08 - 0.20 - 0.30	ACP200 ACP300 XCU2500
M	Stainless Steel	220 to 280HB	90 - 135 - 180	0.08 - 0.15 - 0.25	ACU2500 ACM200 ACM300
		> 280HB	70 - 115 - 160	0.08 - 0.15 - 0.25	
K	Cast Iron/ Ductile Cast Iron	250HB	125 - 175 - 225	0.08 - 0.20 - 0.30	ACU2500 ACK200 ACK300 XCU2500 XCK2000
S	Exotic Alloy	—	30 - 60 - 90	0.05 - 0.10 - 0.15	ACU2500 ACM200 ACM300

- Note**
- The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
 - The above figures are guidelines for use with BT50 machine tools.
 - The above are the recommended cutting conditions for ae = diameter DC 20% or less.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed

TSXR 13000E type



Rake Angle	Radial	-23 to -18°	41 to 60 mm 90°	 Shoulder Milling	 Side Milling
	Axial	-6° to -3°			

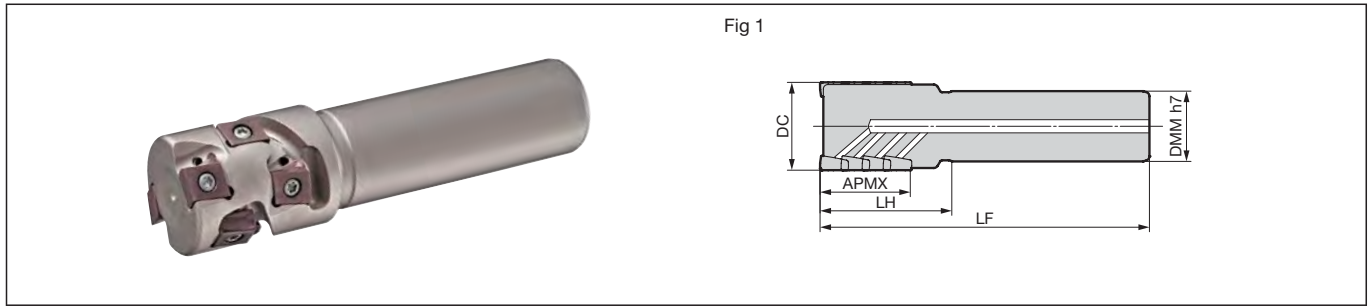

Body

Cat. No.		Stock	Dia. DC	Max. Depth of Cut APMX	Shank Dia. DMM	Head LH	Overall Length LF	Total No. of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
Metric	TSXR 13040E4132Z02	●	40	41	32	60	150	8	4	2	0.91	1
	13050E6042Z03	●	50	60	42	80	170	18	6	3	1.74	1

Inserts are sold separately.

Identification Code

TSXR **13** **050** **E** **60** **42** **Z03**
 Series Code Insert Size Dia. Shank type Max. Depth of Cut Shank Dia. Effective No. of Teeth

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
 BFTX03510IP 3.0	 TRDR15IP	 SUMI-P

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals


Cast Iron, High-Speed

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Cemented Carbide	DLC	Corner Radius RE	Fig		
Process	High-speed/Light Cutting														
	Medium Cutting														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H20	DL2000	Corner Radius RE	Fig
LNEX	130604PNER-L	●	●		●	●	●	●	●	●	●			0.4	1
	130608PNER-L	●	●		●	●	●	●	●	●	●			0.8	1
	130612PNER-L	●	●		●	●	●	●	●	●	●			1.2	1
	130616PNER-L	●	●		●	●	●	●	●	●	●			1.6	1
	130620PNER-L	●	●		●	●	●	●	●	●	●			2.0	1
	130624PNER-L	●	●		●	●	●	●	●	●	●			2.4	1
LNEX	130632PNER-L	●	●		●	●	●	●	●	●				3.2	1
LNEX	130604PNER-G	●	●		●	●	●	●	●	●	●			0.4	1
	130608PNER-G	●	●		●	●	●	●	●	●	●			0.8	1
	130612PNER-G	●	●		●	●	●	●	●	●	●			1.2	1
	130616PNER-G	●	●		●	●	●	●	●	●	●			1.6	1
	130620PNER-G	●	●		●	●	●	●	●	●	●			2.0	1
	130624PNER-G	●	●		●	●	●	●	●	●	●			2.4	1
LNEX	130632PNER-G	●	●		●	●	●	●	●	●				3.2	1
LNEX	130604PNER-H	●	●		●	●	●	●	●	●	●			0.4	1
	130608PNER-H	●	●		●	●	●	●	●	●	●			0.8	1
	130612PNER-H	●	●		●	●	●	●	●	●	●			1.2	1
	130616PNER-H	●	●		●	●	●	●	●	●	●			1.6	1
	130620PNER-H	●	●		●	●	●	●	●	●	●			2.0	1
	130624PNER-H	●	●		●	●	●	●	●	●	●			2.4	1
LNEX	130632PNER-H	●	●		●	●	●	●	●	●				3.2	1
LNEX	130602PNFR-S	—	—	—	—	—	—	—	—	—	—			0.2	1
	130604PNFR-S	—	—	—	—	—	—	—	—	—	—			0.4	1
	130608PNFR-S	—	—	—	—	—	—	—	—	—	—			0.8	1
	130612PNFR-S	—	—	—	—	—	—	—	—	—	—			1.2	1
	130616PNFR-S	—	—	—	—	—	—	—	—	—	—			1.6	1
	130620PNFR-S	—	—	—	—	—	—	—	—	—	—			2.0	1
LNEX	130624PNFR-S	—	—	—	—	—	—	—	—	—			2.4	1	
LNEX	130632PNFR-S	—	—	—	—	—	—	—	—	—				3.2	1

Use peripheral inserts with RE of 0.8mm or less from the second stage and above.



Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	180 to 280HB	110 - 200 - 280	0.10 - 0.20 - 0.30	ACU2500 ACP100
		> 280HB	70 - 135 - 200	0.10 - 0.20 - 0.30	ACP200 ACP300 XCU2500
M	Alloy Steel	180 to 280HB	90 - 155 - 220	0.10 - 0.15 - 0.25	ACU2500 ACM200 ACM300
		220 to 280HB	90 - 135 - 180	0.10 - 0.15 - 0.25	
K	Stainless Steel	> 280HB	70 - 115 - 160	0.10 - 0.15 - 0.25	
		Cast Iron/ Ductile Cast Iron	250HB	125 - 175 - 225	0.10 - 0.20 - 0.30
S	Exotic Alloy	—	30 - 60 - 90	0.05 - 0.10 - 0.15	ACU2500 ACM200 ACM300

- Note**
- The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.
 - The above figures are guidelines for use with BT50 machine tools.
 - The above are the recommended cutting conditions for ae = diameter DC 20% or less.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron,
High-Speed

SEC-Sumi Dual Mill TSX series Repeater Made-To-Order Request Sheet (1)

Select a cutter design and enter the dimensions in .

After completion, send the sheet to our nearest sales office or distributor.
Feel free to contact us for other shapes or dimensions or with other requests.

Company Name/Contact

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

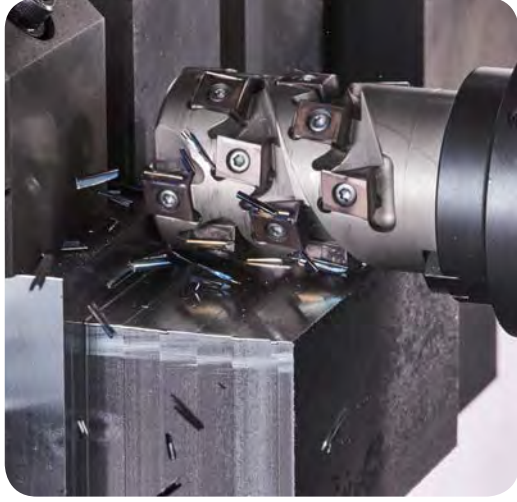

Reference Specifications							
Applicable Inserts	Dia. (mm)	Max. Depth of Cut (mm)	Total No. of Teeth	No. of Stages	Max. Effective No. of Teeth	Specifications	
	DC	APMX				Shell type	Shank type
LNEX08 (Refer to H141)	20	21	3	3	1		○
	25	27	8	4	2		○
	32	34	10	5	2	○	○
	40	40	18	6	3	○	○
	50	54	32	8	4	○	
	63	60	45	9	5	○	
LNEX13 (Refer to H143)	40	41	8	4	2	○	○
	50	60	18	6	3	○	○
	63	60	24	6	4	○	
	80	60	30	6	5	○	
	100	60	36	6	6	○	
	125	60	42	6	7	○	

Shank type Refer to the reference specifications above when completing.

Accessories

Flat Insert Screw	Wrench	Anti-seizure Cream

- The tip insert corner radius (RE) can be selected. (Applicable size: Refer to H127 ■ Product Range) Other inserts are all RE = 0.8mm or less.
- Effective No. of Teeth Desired:
- Coolant Hole: Yes No

SEC-Sumi Dual Mill TSX series Repeater Made-To-Order Request Sheet (2)

Select a cutter design and enter the dimensions in .

After completion, send the sheet to our nearest sales office or distributor.
 Feel free to contact us for other shapes or dimensions or with other requests.

Company Name/Contact

Shell Refer to the reference specifications on H148.

DC

RE

APMX

LF

KWW

DCB

CDBP

KDP

DCSFMS

Integrated Arbor Refer to the reference specifications on H148.

DC





RE

APMX

LH

Interface

■ **Accessories**

Flat Insert Screw	Wrench	Bolt	Anti-seizure Cream
			
		<small>*Shell type Only</small>	

· The tip insert corner radius (RE) can be selected.
 (Applicable size: Refer to H127 ■ Product Range)
 Other inserts are all RE = 0.8mm or less.

· Effective No. of Teeth Desired:

· Coolant Hole: Yes No

SEC-Sumi Dual Mill TSX series Side Cutter Made-To-Order Sheet

Select a cutter design and enter the dimensions in .

After completion, send the sheet to our nearest sales office or distributor.
Feel free to contact us for other shapes or dimensions or with other requests.

Company Name/Contact

Insert Series Configuration

Cat. No.	Corner Radius RE (mm)						
	0.4	0.8	1.2	1.6	2.0	2.4	3.2
LNEX 0804 \circ OPNER/L-L	●	●	●	●	—	—	—
LNEX 0804 \circ OPNER/L-G	●	●	●	●	—	—	—
LNEX 1306 \circ OPNER/L-L	●	●	●	●	●	●	●
LNEX 1306 \circ OPNER/L-G	●	●	●	●	●	●	●
LNEX 1306 \circ OPNER-H	●	●	●	●	●	●	●

— mark: Not available




[Insert Special Orders]



LNEX08 has Corner Radius (RE) = 0.4 to 1.6mm
 LNEX13 has Corner Radius (RE) = 0.4 to 3.2mm.
 Both right-hand and left-hand types are supported.
 (Radius shape after machining may differ from the mounted insert corner radius RE size.)
 LNEX1306 \circ OPNEL-H (left-handed H type chipbreaker) is not available.

CW Size Reference Specification	
14mm	LNEX08 (Refer to H141)
18 to 22mm	LNEX13 (Refer to H143)

A multi-stage design is required if the CW size exceeds the above.

Accessories

Flat Insert Screw	Wrench	Anti-seizure Cream
		

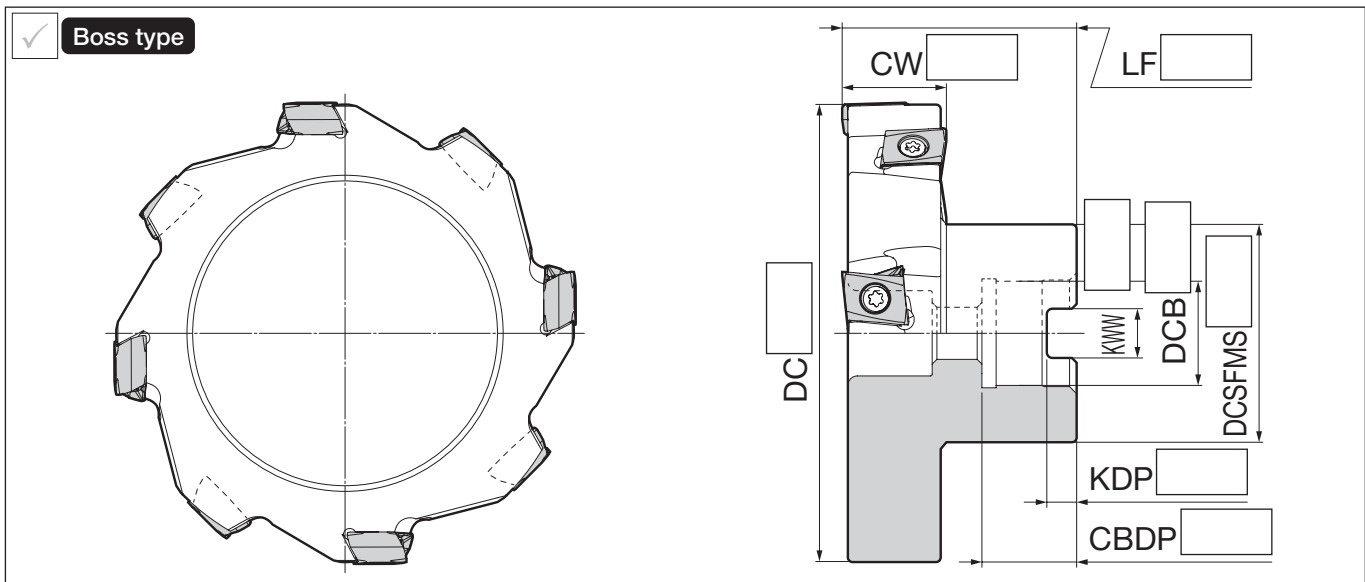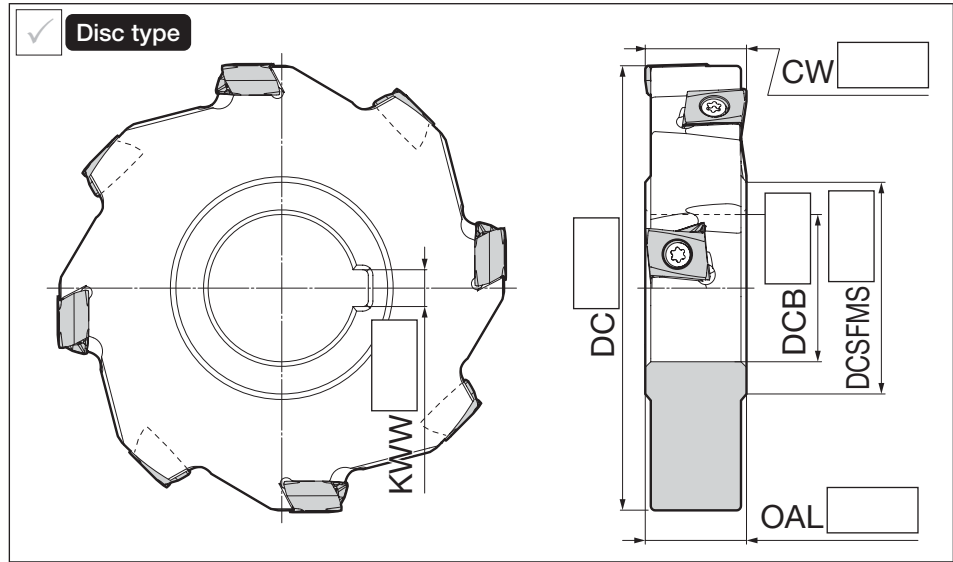

Effective No. of Teeth Desired:

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

SEC-Sumi Dual Mill TSX series Made-To-Order Request Sheet

Select a cutter design and enter the dimensions in .

After completion, send the sheet to our nearest sales office or distributor.
Feel free to contact us for other shapes or dimensions or with other requests.

Company Name/Contact

Insert Series Configuration

Cat. No.	Corner Radius RE (mm)						
	0.4	0.8	1.2	1.6	2.0	2.4	3.2
LNEX 0804 \circ OPNER/L-L	●	●	●	●	—	—	—
LNEX 0804 \circ OPNER/L-G	●	●	●	●	—	—	—
LNEX 1306 \circ OPNER/L-L	●	●	●	●	●	●	●
LNEX 1306 \circ OPNER/L-G	●	●	●	●	●	●	●
LNEX 1306 \circ OPNER-H	●	●	●	●	●	●	●

— mark: Not available

[Insert Special Orders]

LNEX08 has Corner Radius (RE) = 0.4 to 1.6mm

LNEX13 has Corner Radius (RE) = 0.4 to 3.2mm.

Both right-hand and left-hand types are supported.




(Radius shape after machining may differ from the mounted insert corner radius RE size.)

LNEX1306 \circ OPNEL-H (left-handed H type chipbreaker) is not available.


CW Size Reference Specification	
14mm	LNEX08 (Refer to H141)
18 to 22mm	LNEX13 (Refer to H143)

A multi-stage design is required if the CW size exceeds the above.

Accessories

Flat Insert Screw	Wrench	Anti-seizure Cream
		

T-Slot type


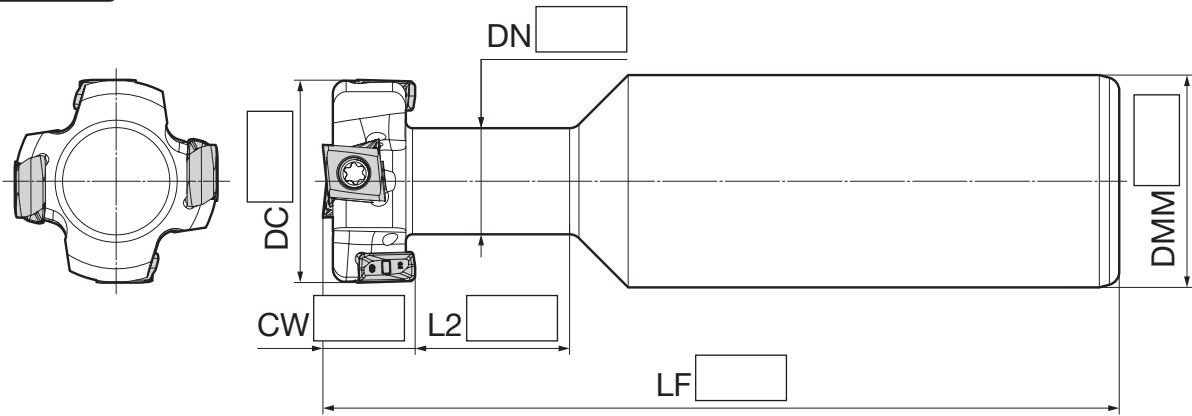


· Effective No. of Teeth Desired: · Coolant Hole: Yes No

■ Angled cutters, high-feed cutters and bore cutters can be designed. For details, please contact us.



PWC(F) 4000 type

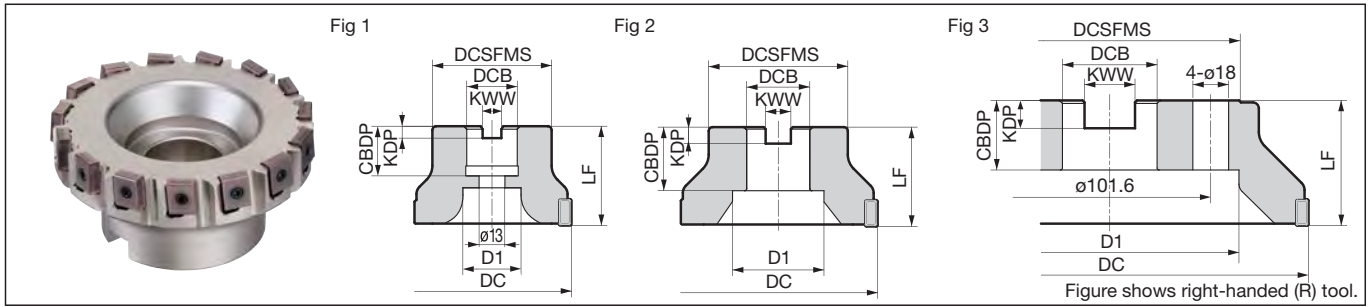

Body (Standard Pitch)

Cat. No.	Stock		Dimensions (mm)										Fig
	R	L	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Number of Teeth	Weight (kg)	
PWC 4080R/L	●		80	60	50	25.4	9.5	6	25	29.5	7	0.9	1
4100R/L	●		100	70	50	31.75	12.7	8	32	46	8	1.3	2
4125R/L	●		125	80	63	38.1	15.9	10	38	56	10	2.5	2
4160R/L	●		160	100	63	50.8	19.1	11	38	72	12	4.2	2
4200R/L	●		200	150	63	47.625	25.4	14	35	130	16	7.2	3

Body (Extra Fine Pitch)

Cat. No.	Stock		Dimensions (mm)										Fig
	R	L	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Number of Teeth	Weight (kg)	
PWCF 4080R/L	●		80	60	50	25.4	9.5	6	25	29.5	9	0.9	1
4100R/L	●		100	70	50	31.75	12.7	8	32	46	12	1.4	2
4125R/L	●		125	80	63	38.1	15.9	10	38	56	15	2.6	2
4160R/L	●		160	100	63	50.8	19.1	11	38	72	18	4.3	2
4200R/L	●		200	150	63	47.625	25.4	14	35	130	24	7.4	3

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert

Grade Classification	Coated Carbide		
	High-speed/Light Cutting	K	K
General-purpose	K	K	
Roughing			K

Cat. No.	ACK100	ACK200	ACK300	Applications	Remarks	Fig
LNMX 160608PNSN-G	●	●	●	General-purpose machining	1st Recommendation	1
160608PNSN-H	●	●	●	Heavy interrupted cutting and other unstable applications		2

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0412N 3.0	TTX15W	SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
K	Cast Iron	250HB	150-250-350	0.10-0.23-0.35	ACK200/ACK300
	Ductile Cast Iron	250HB	100-200-300	0.05-0.18-0.30	ACK100/ACK200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

PWS(F) series/PWSR series



■ Features

A highly reliable cutter equipped with tangentially-mounted inserts that combines unprecedented high cutting edge strength and sharpness.

PWSR type, with a 2-stage insert array structure supporting large depths of cut, has been added to the lineup.


- Tangential inserts with excellent cutting edge strength and optimised breaker provide superb cutting edge and sharpness.
- Nicked insert design created with high-precision molding technology allows stable milling and low chatter even in applications with large tool overhang.

■ Performance

● General-purpose G type Insert Performance Comparison

Comparison of Cutting Edge Strength

Strong cutting edge delivers superb stability

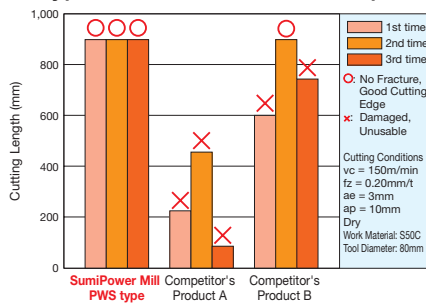


● Nicked R type Insert Performance Comparison

Nicked R type Insert General-purpose G type Insert




Comparison of Cutting Force

Sharpness approaching that of screw-on inserts

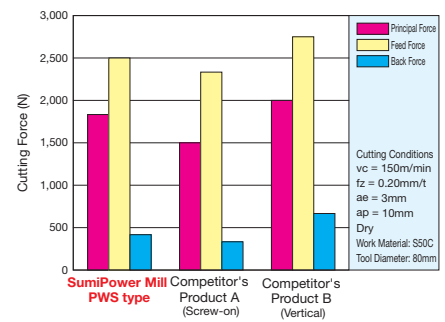

Comparison of Cutting Force

Reduced cutting power and excellent chatter resistance

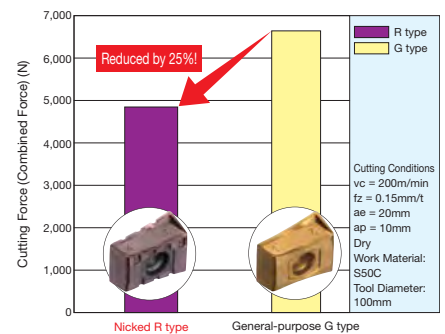


■ Product Range

Type	Cat. No.	Dia. (mm)					
		ø80	ø100	ø125	ø160	ø200	ø250
Shell	PWS 4000R	4	6	6	8	10	12
	PWSF 4000R	6	8	8	10	12	14
	PWSR 4000	4	6	6	8	10	

Number in ●○ shows the number of teeth Inch Inch Bore

⚠ Nicked R type Insert Usage Precautions



1) Precautions when Mounting

When using the nicked R type indexable inserts, mount them so that the nicked grooves alternate as shown in the image on the left.

2) Precautions for Cutting Conditions

When the inserts are mounted as shown in the left figure, the feed rate per tooth is doubled that of mounting inserts with the same edge design. As such, set feed rate

$$fz = 0.25\text{mm/t}$$

as the upper limit and adjust accordingly. .



Ex.) For use with $fz = 0.2\text{mm/t}$

With all regular inserts: feed rate per tooth 0.2mm/t

With nicked type inserts: **feed rate per tooth 0.4mm/t**

Using inserts incorrectly may damage tools.

PWS(F) 4000 type

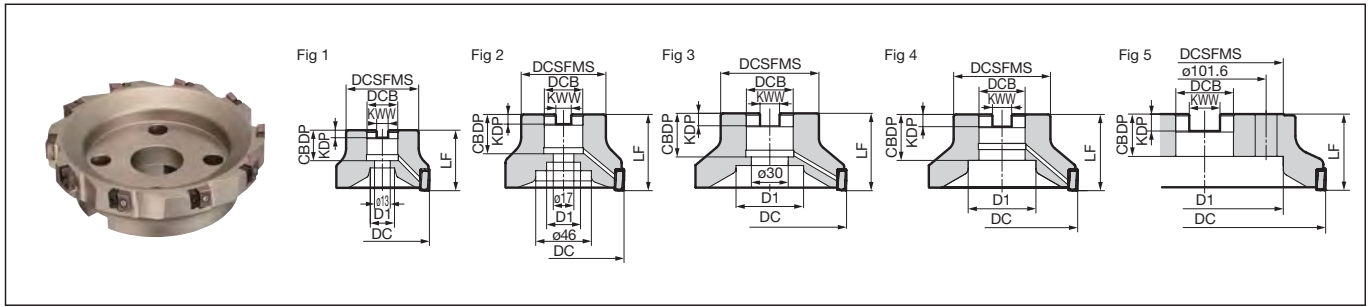

Body (Standard Pitch)

												Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Number of Teeth	Weight (kg)	Fig	
PWS 4080R	●	80	60	50	25.4	9.5	6	25	20	4	1.0	1	
4100R	●	100	70	63	31.75	12.7	8	32.5	28	6	1.8	2	
4125R	●	125	80	63	38.1	15.9	10	35.5	55	6	2.4	3	
4160R	●	160	100	63	50.8	19.1	11	41.5	72	8	4.0	4	
4200R	●	200	130	63	47.625	25.4	14	35	130	10	6.6	5	
4250R	●	250	130	63	47.625	25.4	14	35	160	12	12.4	5	

Cutters ø200mm or larger do not have oil holes but come with shims.
Inserts are sold separately.

Body (Extra Fine Pitch)

												Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Number of Teeth	Weight (kg)	Fig	
PWSF 4080R	●	80	60	50	25.4	9.5	6	25	20	6	0.9	1	
4100R	●	100	70	63	31.75	12.7	8	32.5	28	8	1.7	2	
4125R	●	125	80	63	38.1	15.9	10	35.5	55	8	2.3	3	
4160R	●	160	100	63	50.8	19.1	11	41.5	72	10	3.9	4	
4200R	●	200	130	63	47.625	25.4	14	35	130	12	6.6	5	
4250R	●	250	130	63	47.625	25.4	14	35	160	14	12.5	5	

Cutters ø200mm or larger do not have oil holes but come with shims.
Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

							Dimensions (mm)	
Grade Classification		Coated Carbide						
Process	High-speed/Light Cutting	P				K		
	General-purpose		P	P		K		
	Roughing		P	P			K	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	Applications	Remarks	Fig
LNMX 170808PNSR-L	●	●	●	●	●	Light Cutting		1
170808PNSR-G	●	●	●	●	●	General-purpose	1st Recommendation	1
170808PNSR-R	●	●	●	●	●	Heavy Cutting	Nicked	2

Parts

Flat Head Screw (For Inserts/Shims)	Wrench	Anti-seizure Cream	Shim (*)
BFTX0412IP 3.0	TTR15IP	SUMI-P	PWSS4R

* For cutters ø200mm or larger.

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	150-250-350	0.10-0.23-0.35	ACP200
	Alloy Steel	180 to 280HB	100-175-250	0.10-0.18-0.25	ACP200
M	Stainless Steel	—	100-150-200	0.10-0.18-0.25	ACP300
K	Cast Iron Ductile Cast Iron	250HB	100-175-250	0.10-0.23-0.35	ACK200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


PWSR 4000 type



Rake Angle	Radial	-15°
	Axial	-6°

31mm **90°**

Face Milling Shoulder Milling Groove Milling Side Milling

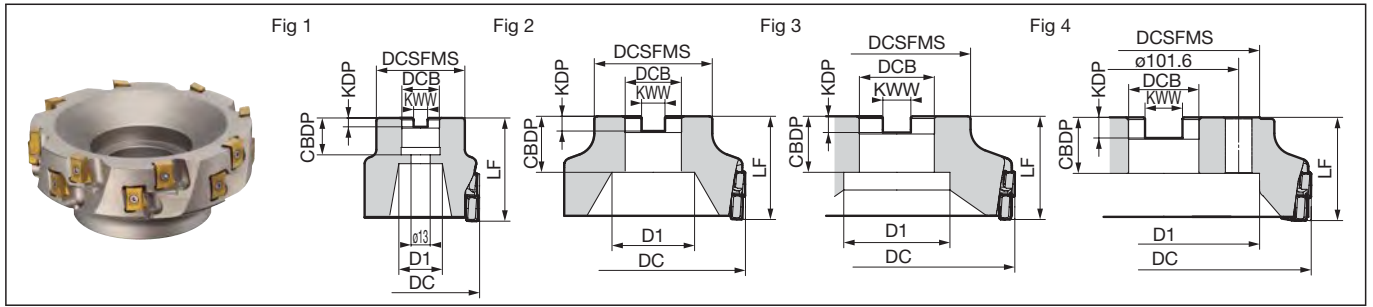

Body (2-Step type)

													Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Number of Teeth	No. of Stages	Effective No. of Teeth	Weight (kg)	Fig
PWSR 4080R		80	60	70	25.4	9.5	6	25	29.5	8	2	4	1.4	1
4100R		100	70	70	31.75	12.7	8	32	46	12	2	6	2.0	2
4125R		125	80	70	38.1	15.9	10	38	56	12	2	6	3.0	2
4160R		160	100	70	50.8	19.1	11	38	72	16	2	8	5.2	3
4200R		200	130	70	47.625	25.4	14	38	160	20	2	10	8.0	4

Cutters ø200mm or larger do not have oil holes but come with shims.

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Insert

Grade Classification		Coated Carbide							
Process	High-speed/Light Cutting	P			K				
	General-purpose		M	P	K				
	Roughing		M	P		K			
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	Applications	Remarks	Fig	
LNMX 170808PNSR-L	●	●	●	●	●	Light Cutting		1	
170808PNSR-G	●	●	●	●	●	General-purpose	1st Recommendation	1	
170808PNSR-R	●	●	●	●	●	Heavy Cutting	Nicked	2	

Fig 1

Fig 2

Parts

Flat Head Screw (For Inserts/Shims)	Wrench	Anti-seizure Cream	Shim (*)
BFTX0412IP 3.0	TTR15IP	SUMI-P	PWSS4R


* For cutters ø200mm or larger.

Recommended Cutting Conditions



ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	150- 250 -350	0.10- 0.23 -0.35	ACP200
	Alloy Steel	180 to 280HB	100- 175 -250	0.10- 0.18 -0.25	ACP200
M	Stainless Steel	—	100- 150 -200	0.10- 0.18 -0.25	ACP300
K	Cast Iron	250HB	100- 175 -250	0.10- 0.23 -0.35	ACK200
	Ductile Cast Iron				

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Large Diameter Size (ø200mm or larger)
Body Structure
Safety Shim Design to Protect Body

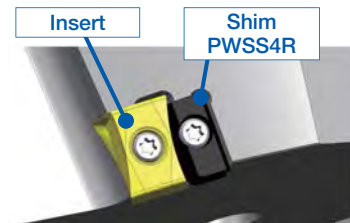

CHG 4000 type

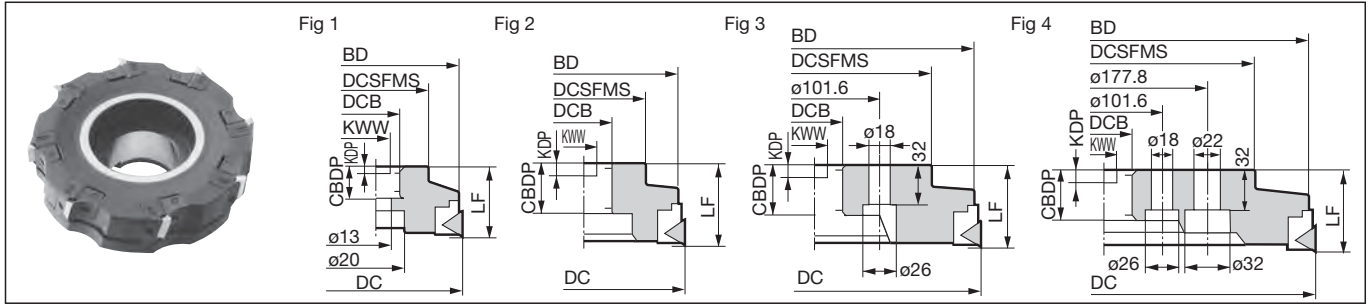

Body


Cat. No.	Stock	Dimensions (mm)										
		Dia. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDDP	Number of Teeth	Weight (kg)	Fig
CHG 4080R	●	80	78	60	50	25.4	9.5	6	25	4	1.3	1
4100R	●	100	96	70	63	31.75	12.7	8	32	5	2.0	2
4125R	●	125	120	80	63	38.1	15.9	10	38	6	3.1	2
4160R	●	160	154	100	63	50.8	19.1	11	38	8	5.3	2
4200R	●	200	193	130	63	47.625	25.4	13.5	38	10	8.1	3
4250R	●	250	242	180	63	47.625	25.4	13.5	40	12	13.8	3
4315R	●	315	307	240	63	47.625	25.4	13.5	40	14	21.9	4

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert


Grade Classification	Coated Carbide			Cemented Carbide	Cermet	SUMIDIA								
	High-speed/Light Cutting	General-purpose	Roughing											
Process	P	M, P, K	K	M, P, K	P	N	N	N						
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	G10E	H1	T250A	DA150	DA1000	DA2200	Fig
TEEN 43R*							●	●			●			1-A
NF-TEEN 43R											●	▲		1-A
TEEN 43TR	●	●	●				●							2(1)-B
TEKN 43R				●	●		●							2(1)-A
43TR	●	●	●				●							2(1)-B

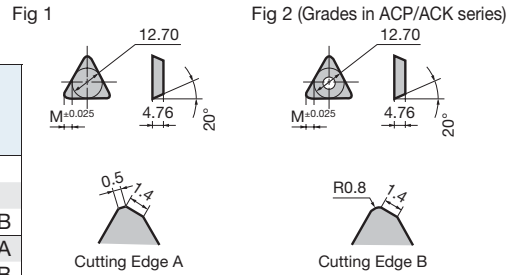

DL1000 is also available for *-marked TEEN43R.

Top face and wiper edge of H1 insert have a mirror finish.

E class precision inserts have some difference in shape.

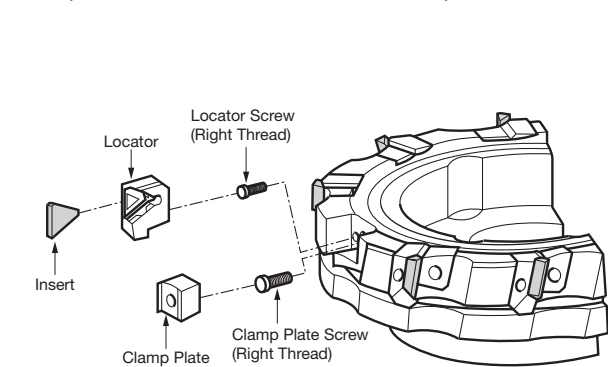

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grades
P	General Steel	180 to 280HB	80-115-150	0.10-0.18-0.25	ACP200
	Mild Steel	≤ 180HB	100-125-150	0.10-0.15-0.20	ACP200
	Die Steel	200 to 220HB	60-80-100	0.10-0.15-0.20	ACP200
M	Stainless Steel	—	80-115-150	0.05-0.10-0.15	ACP300
K	Cast Iron	250HB	60-90-120	0.10-0.18-0.25	ACK200
N	Non-Ferrous Metals	—	300-650-1,000	0.10-0.20-0.30	DA1000 H1

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Parts


Applicable Cutter	Locator	Locator Screw		Clamp Plate	Clamp Plate Screw		Wrench		
			Size			Size			
CHG 4080R to CHG 4125R CHG 4160R to CHG 4315R	LCH4R	FBH0512	M5	5.0	CHWR	FBX0811 FBX0817	M8	8.0	TH030 TH040

The wrench for locator screw is TH030 and for clamp plate screw is TH040.

CHE 2000 type



Rake Angle	Radial	-3° to 0°	8mm	90°	Face Milling Shoulder Milling Groove Milling Side Milling
	Axial	6° to 15°			

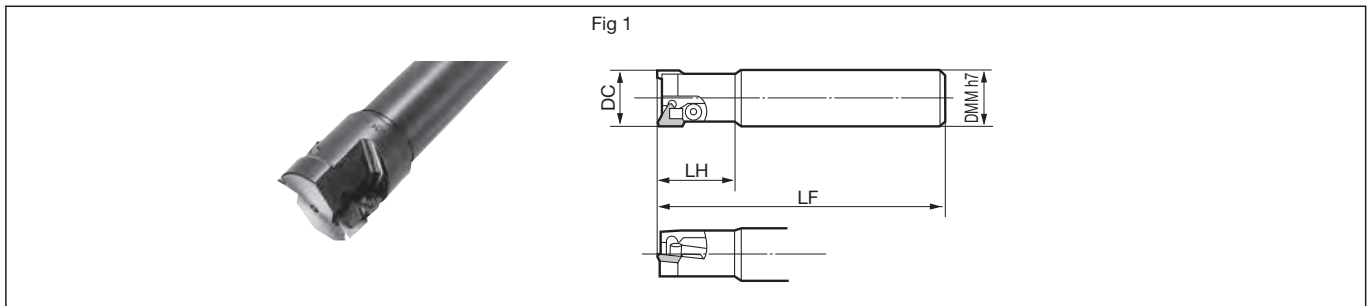


Body

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Axial Rake	Radial Rake	Fig
CHE 2016R	●	16	16	25	100	1	+6°	-3°	1
2018R	●	18	20	30	110	1	+8°	-2°	1
2020R	●	20	20	30	110	2	+10°	-2°	1
2022R	●	22	20	30	110	2	+12°	-1°	1
2025R	●	25	25	35	120	2	+15°	-1°	1
2028R	●	28	25	35	120	2	+15°	0°	1

Inserts are sold separately.

Insert

Grade Classification	Cemented Carbide				Cermet		SUMIDIA		Cutting Edge Shape	Fig
	Coated Carbide	A30N	G10E	H1	T250A	DA1000	DA2200			
High-speed/Light Cutting								N	N	
General-purpose	P	P	K		P	N	N	N	N	
Roughing	P					N	N	N	N	
Cat. No.	ACP200	A30N	G10E	H1	T250A	DA1000	DA2200			
TEEN 22R	—	—	—	—	—	—	—	A	1	
NF-TEEN 22R	—	—	—	—	—	●	▲	A	1	
TECN 22R	—	—	●	●	—	—	—	A	1	
22TR	—	●	—	—	—	—	—	B	1	
TEKN 22R	—	—	●	—	—	—	—	A	1	
22TR	—	●	—	—	●	—	—	B	1	



Parts


Clamp Plate	Bolt	Retaining Ring	Wrench
CCH4R	BHE0407	ER03	TH025

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	50- 75 -100	0.03- 0.06 -0.10	A30N
	Alloy Steel	180 to 280HB	50- 75 -80	0.03- 0.05 -0.06	A30N
K	Cast Iron	250HB	40- 70 -100	0.03- 0.10 -0.15	G10E
N	Non-Ferrous Metals	—	40- 90 -150	0.03- 0.10 -0.15	DA1000 H1


Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

CHE 3000 type



Milling Cutters

H

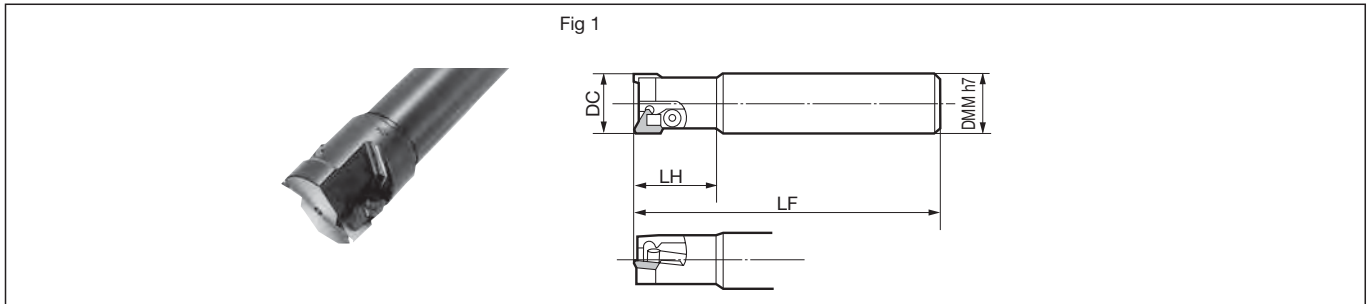

Face Milling

Shoulder Milling

Body

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Axial Rake	Radial Rake	Fig
CHE 3030R	●	30	32	45	160	2	+15°	-3°	1
3032R	●	32	32	45	160	2	+15°	-2°	1
3036R	●	36	32	45	160	2	+15°	-1°	1
3040R	●	40	32	45	160	2	+15°	0°	1

Inserts are sold separately.

High-Feed

Multi-purpose


Radius

Insert

Dimensions (mm)

Grade Classification	Coated Carbide		Cemented Carbide		Cermet	SUMIDIA		Cutting Edge Shape	Fig
	High-speed/Light Cutting	General-purpose	Roughing						
Cat. No.	ACP200	ACK200	A30N	G10E	H1	T250A	DA1000	DA2200	
TEEN 32R	—	—	—	—	—	—	—	—	A 1
NF-TEEN 32R	—	—	—	—	—	—	●	▲	A 1
TECN 32R	—	—	●	●	—	—	—	—	A 1
32TR	—	—	●	—	—	—	—	—	B 1
TEKN 32R	—	●	●	—	—	—	—	—	A 1
32TR	●	—	●	—	●	—	—	—	B 1

Fig 1



Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Parts

Clamp Plate	Bolt	Retaining Ring	Wrench
CCH5R	BHE0510	2.7	ER04
			LH030

Recommended Cutting Conditions


ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	60- 90 -120	0.04- 0.08 -0.15	ACP200
P	Alloy Steel	180 to 280HB	60- 80 -100	0.04- 0.08 -0.13	ACP200
K	Cast Iron	250HB	60- 90 -120	0.04- 0.12 -0.20	ACK200
N	Non-Ferrous Metals	—	60- 130 -200	0.04- 0.12 -0.20	DA1000 H1

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

CHE 4000 type



Rake Angle	Radial	2° to 4°	16mm	90°	
	Axial	15°			

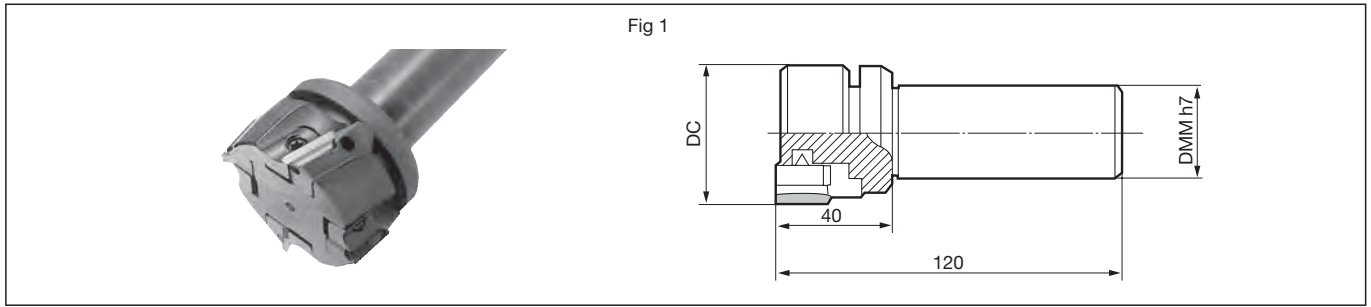

Body


Cat. No.	Stock	Dia. DC	Shank DMM	Number of Teeth	Axial Rake	Radial Rake	Approach Angle	Fig
CHE 4050R	●	50	32	3	+15°	+2°	0°	1
4063R	●	63	32	4	+15°	+3°	0°	1
4080R	●	80	32	4	+15°	+4°	0°	1
4080RS42		80	42	4	+15°	+4°	0°	1
4100R		100	32	5	+15°	+4°	0°	1
4100RS42		100	42	5	+15°	+4°	0°	1

Inserts are sold separately.

Insert

Grade Classification	Coated Carbide					Cemented Carbide			Cermet	SUMIDIA			
Process	High-speed/Light Cutting	P	M	K	M					N	N	N	
	General-purpose			K		P	K		P	N	N	N	
	Roughing			K						N	N	N	
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30N	G10E	H1	T250A	DA150	DA1000	DA2200
TEEN 43R*								●	●		●		
NF-TEEN 43R											▲		
TEEN 43TR	●	●	●				●			●			
TEKN 43R				●	●			●					
43TR	●	●	●				●			●			

DL1000 is also available for *-marked TEEN43R.
 Top face and wiper edge of H1 insert have a mirror finish.
 E class precision inserts have some difference in shape.

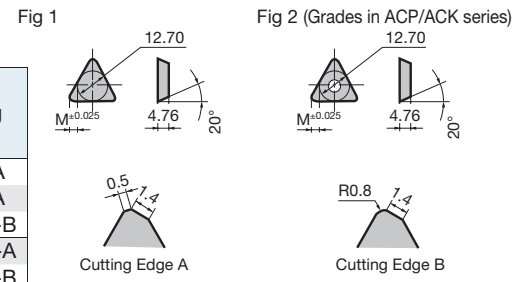

Parts

Applicable Cutter	Locator	Locator Screw		Clamp Plate		Clamp Plate Screw		Wrench	
			Size	(N·m)			Size	(N·m)	
CHE4050R CHE4063R	LCE4R	FBH0512	M5	5.0	CEWR	WB8R-16T	M8	8.0	TT27

Parts

Applicable Cutter	Locator	Locator Screw		Clamp Plate		Clamp Plate Screw		Wrench	
			Size	(N·m)			Size	(N·m)	
CHE4080R CHE4100R CHE4080RS42 CHE4100RS42	LCH4R	FBH0512	M5	5.0	CHWR	FBX0811	M8	5.0	TH040



* The above includes a TH030 wrench for locator screw.

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	125-100-150	0.10-0.15-0.20	ACP200
	Alloy Steel	180 to 280HB	80-100-120	0.10-0.20-0.30	ACP200
K	Cast Iron	250HB	80-100-120	0.10-0.20-0.30	ACK200
N	Non-Ferrous Metals	—	60-130-200	0.05-0.20-0.30	DA1000 H1

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

CPG 4000 type

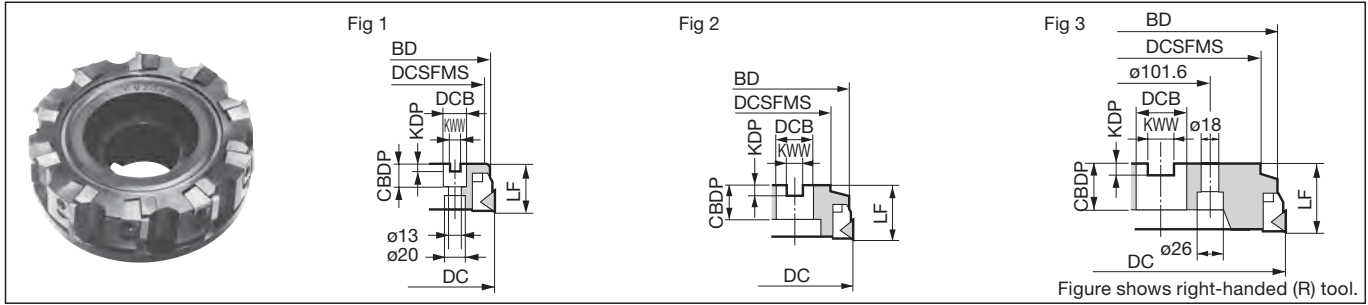

Body

Cat. No.	Stock		Dimensions (mm)										
	R	L	DC	BD	DCSFMS	LF	DCB	KWW	KDP	CBDP	Number of Teeth	Weight (kg)	Fig
CPG 4080R/L	●		80	77	60	50	25.4	9.5	6	25	5	1.2	1
4100R/L	●		100	97	75	60	31.75	12.7	8	32	6	2.0	2
4125R/L	●		125	121	75	60	38.1	15.9	10	38	8	3.3	2
4160R/L	●		160	155	100	60	50.8	19.1	11	38	10	5.5	2
4200R/L	●		200	194	130	60	47.625	25.4	13.5	38	12	8.6	3
4250R/L	●		250	243	200	70	47.625	25.4	13.5	52	14	17.9	3
4315R/L	●		315	308	240	70	47.625	25.4	13.5	52	18	25.5	3



Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification	Coated Carbide						Cemented Carbide				Cermet		
	High-speed/Light Cutting	P	P	K	K	M	A30	A30N	H10E	G10E	T1500A	T130A	T250A
Process	General-purpose						P	P	K	K			P
	Roughing												
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	EH20Z	A30	A30N	H10E	G10E	T1500A	T130A	T250A
TPCH 43R				●	●	●							
43L													
43TR	●	●	●					●	●		●		●
43TL								●	●				
TPMN 432							●			●	●	●	
433							●			●	●	●	

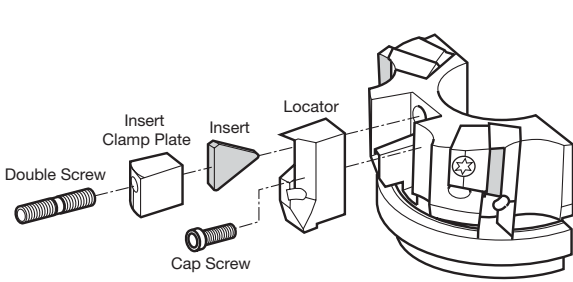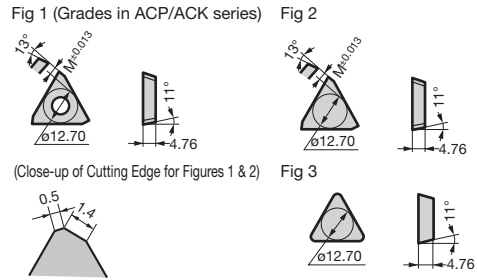

Parts

Applicable Cutter	Locator	Cap Screw	Clamp Plate	Double Screw	Wrench
CPG4080R	LCP40R	BX0508	PTW40R	WB8-22T	TT27 LH040
CPG4100R Up to CPG4125R	LCP40R	BX0510	PTW41R	WB8-22T	TT27 LH040
CPG4160R Up to CPG4315R	LCP40R	BX0510	PTW41R	WB8-30T	TT27 LH040
CPG4080L	LCP40L	BX0508	PTW40L	WB8-22T	TT27 LH040
CPG4100L Up to CPG4125L	LCP40L	BX0510	PTW41L	WB8-22T	TT27 LH040
CPG4160L Up to CPG4315L	LCP40L	BX0510	PTW41L	WB8-30T	TT27 LH040

Of the wrenches, TT27 is for double screw while LH040 is for cap screw.

Recommended Cutting Conditions


ISO	Work Material	Hardness	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grades
P	General Steel	180 to 280HB	80-110-140	0.10-0.18-0.25	ACP200
	Mild Steel	≤ 180HB	100-125-150	0.10-0.15-0.20	ACP200
	Die Steel	200 to 220HB	60-80-100	0.10-0.15-0.20	ACP200
M	Stainless Steel	—	100-125-150	0.10-0.18-0.25	ACP300
K	Cast Iron	250HB	60-90-120	0.10-0.18-0.25	ACK200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

SEC-Light Endmill FMS series



Rake Angle	Radial	-4° to -6°	8 to 19mm	90°	
	Axial	3° to 7°			

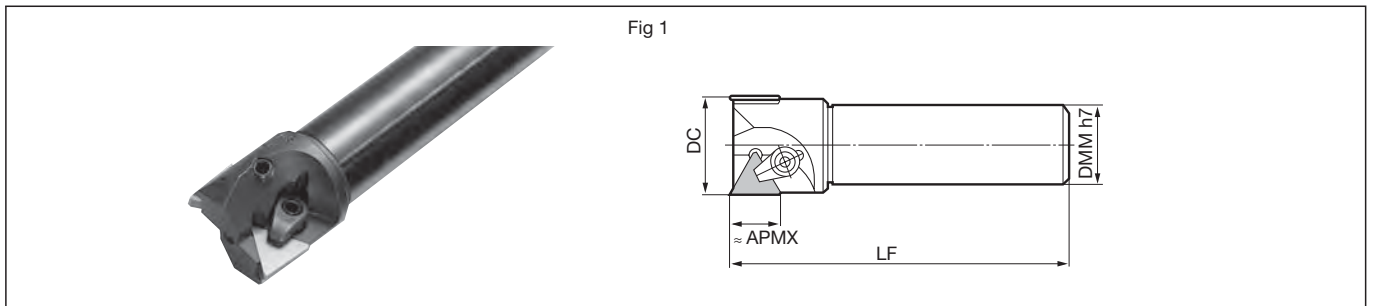

Body

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Overall Length LF	Number of Teeth	Axial Rake	Radial Rake	Fig
FMS 216	●	16	8	16	70	1	+3°	-6°	1
220	●	20	8	20	100	2	+3°	-4°	1
225	●	25	8	25	110	2	+7°	-4°	1
FMS 330	●	30	13	32	160	2	+7°	-4°	1
332	●	32	13	32	160	2	+7°	-4°	1
335	●	35	13	32	160	2	+7°	-4°	1
FMS 440	●	40	19	32	160	2	+7°	-4°	1
450	●	50	19	32	160	2	+7°	-4°	1
460	●	60	19	32	160	3	+7°	-4°	1
440B	●	40	19	42	160	2	+7°	-4°	1

Inserts are sold separately.

Insert

Common to Figs. 1 to 3

Grade Classification	Coated Carbide				Cemented Carbide	Cermet
High-speed/Light Cutting	P	P	K	P		P
General-purpose	P	M	K	P	K	P
Roughing	P	M	K	P		P

Cat. No.	AC100	ACP200	ACP300	ACK200	ACK300	A30N	A30	G10E	T1500A	T250A	Inscribed Circle IC	Thickness S	Corner Radius RE	Fig	Applicable Cutter
TPKN 22TR						●				●	6.35	3.18	0.8	1	FMS
22R											6.35	3.18	0.8	1	216 to
TPMN 222							●	●			6.35	3.18	0.8	4	FMS 225
TPKN 32TR							●			●	9.525	3.18	0.8	2	FMS
32R										●	9.525	3.18	0.8	2	330 to
TPMN 322							●	●		●	9.525	3.18	0.8	4	FMS 335
TPCH 43TR	●	●	●			●			●	●	12.70	4.76	—	3	FMS
43R				●	●						12.70	4.76	—	3	440(B)
TPMN 432							●	●		●	12.70	4.76	0.8	4	to FMS
433							●	●		●	12.70	4.76	1.2	4	460

Dimensions (mm)

H10E is also in stock for TPCH43TR.

EH20Z is also in stock for TPCH43R.

Parts

Applicable Cutter	Clamp Plate	Double Screw		Shim	Spring Pin	Wrench	
			Size				
FMS216 / FMS220	CCM5BSL	WB5-10	M5	5.0	—	—	TH025
FMS225	CCM5BSL	WB5-12	M5	5.0	—	—	TH025
FMS330 to FMS335	CCM6BL	WB6-16	M6	5.0	—	—	LH030
FMS440(B) to FMS460	CCM8UL	WB8-20	M8	8.0	STPL42	SPP308	LH040

Recommended Cutting Conditions

Diameter ø16 to ø25mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	50- 75 -100	0.03-0.06-0.10	ACP200
P	Alloy Steel	180 to 280HB	50- 65 -80	0.03-0.05-0.08	ACP200
K	Cast Iron	250HB	40- 70 -100	0.03-0.10-0.15	ACK200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Diameter ø30 to ø35mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	60- 90 -120	0.04-0.08-0.15	ACP200
P	Alloy Steel	180 to 280HB	60- 80 -100	0.04-0.08-0.13	ACP200
K	Cast Iron	250HB	60- 90 -120	0.04-0.12-0.20	ACK200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Diameter ø40 to ø60mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	60-100-150	0.05-0.15-0.20	ACP200
P	Alloy Steel	180 to 280HB	60- 90 -120	0.05-0.12-0.18	ACP200
K	Cast Iron	250HB	60- 90 -120	0.05-0.15-0.25	ACK200

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.



New



■ Features

- Complex arc-shaped cutting edge achieves a smaller cutting angle and a larger depth of cut simultaneously
High-efficiency machining at maximum feed rate per tooth of 3.5mm/t is possible
- Small cutting angle controls cutting force toward the back force direction
Stable machining without chatter even with long tool overhang amount

■ Product Range

Type	Cat. No.	Max. Diameter (mm)																					
		ø16	ø18	ø20	ø22	ø25	ø26	ø28	ø30	ø32	ø35	ø40	ø42	ø50	ø52	ø63	ø66	ø80	ø85	ø100	ø125	ø160	
Shell	DMSL 06000RS												5 6		5 8	8	8	8	9				
	DMSL 06000R <small>Inch</small>													5 8		8							
	DMSW 08000RS													4 5	4 5	4 5*	5 6	6 8	6 8	6	8	10	
	DMSW 08000R <small>Inch</small>													4 5		4 5 6*		6 8		6	8	10	
Shank	DMSL 06000E	2	2	3 4	3 4	4 5		4 5	5	5 6	5	6											
	DMSL 06000EL	2	2	3	3	4		4	5	5	5	6											
	DMSW 08000E										2	3		3		4							
	DMSW 08000EL											2	3		3		4						
Modular	DMSL 06000M	2	2	3 4	3 4	4 5	4	4 5	5	5 6	5	6	6										
	DMSW 08000M										2	3	3										

Number in ●●● shows the number of teeth Inch Inch Bore * mark: Different-diameter mounting sizes in stock

Modular type H267

■ Chipbreaker (DMSL type)



■ Chipbreaker (DMSW type)

Work Material	P M K S H
Chipbreaker	G type
Cutting Edge Cross Section	



Work Material	P M K S	P M K H	
Chipbreaker	L type	G type	H type
Cutting Edge Cross Section			

DMSL/DMSW series

- Complex arc-shaped cutting edge achieves a smaller cutting angle and a larger depth of cut simultaneously. High-efficiency machining at maximum feed rate per tooth of 3.5mm/t is possible.

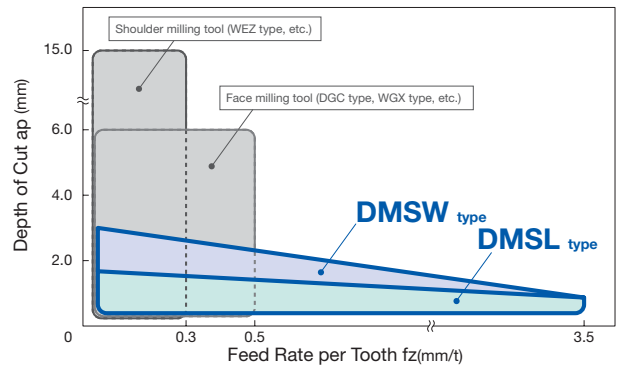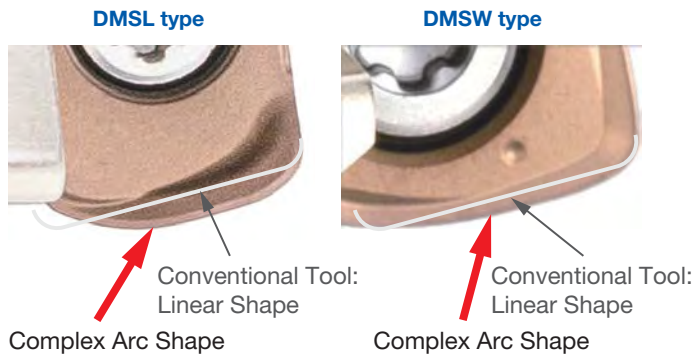

- Even at high feed rates of 2.0mm/t or more, a reasonable surface finish can be attained without a wiper insert.

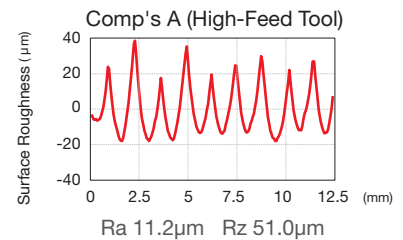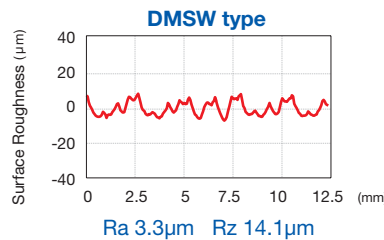




Machine: Vertical Machining Centre BT50, Work Material: S50C Insert: WNMU0807ZNER-G (ACU2500)
 Tool: DMSW 08063RS04 (ø63, 4-tooth) Cutting Conditions: $vc = 150\text{m/min}$, $fz = 2.5\text{mm/t}$, $ap = 0.5\text{mm}$, $ae = 40\text{mm}$ Dry

- Small cutting angle controls cutting force toward the back force direction
 Suppresses chatter in long tool overhang machining, increasing efficiency



DMSL type/DMSW type



(Reference) Shoulder Milling Tool

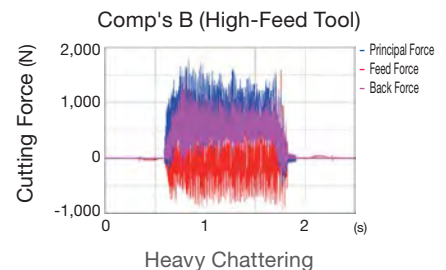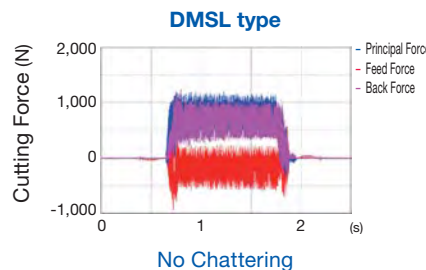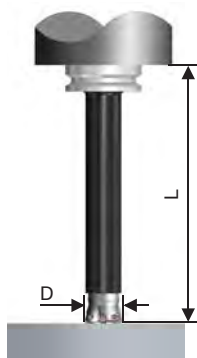

Machine: Vertical Machining Centre BT50, Work Material: S50C
 Tool: DMSL06020E03 (D = ø20, 3 teeth)
 Insert: LNMU06T3ZNER-G (ACU2500)
 Cutting Conditions: $vc = 160\text{m/min}$, $fz = 0.60\text{mm/t}$, $ap = 0.8\text{mm}$, $ae = 20\text{mm}$, $L = 100\text{mm}$, Dry

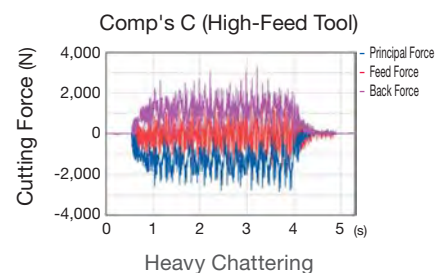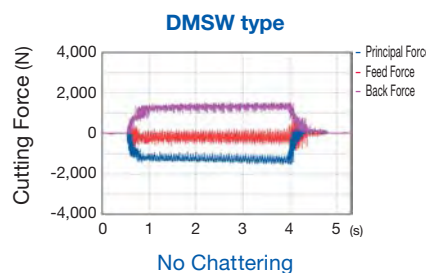


Machine: Vertical Machining Centre BT50, Work Material: S50C
 Tool: DMSW08050RS04 (D = ø50, 4 teeth)
 Insert: WNMU0807ZNER-G (ACU2500)
 Cutting Conditions: $vc = 160\text{m/min}$, $fz = 0.65\text{mm/t}$, $ap = 0.8\text{mm}$, $ae = 45\text{mm}$, $L = 340\text{mm}$, Dry

DMSL/DMSW series

■ Precautions for Corner Finishing


* Corners will have unmachined surfaces or gouges with respect to the expected corner profile.

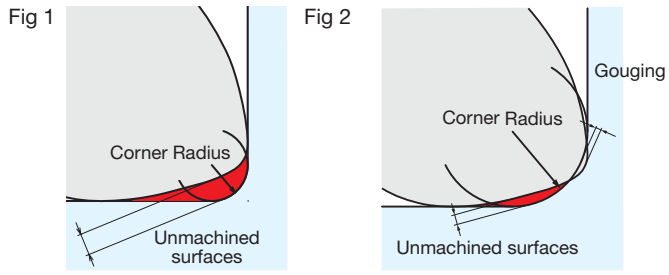

DMSL type				DMSW type			
Corner Radius	Unmachined surfaces	Gouging	Fig	Corner Radius	Unmachined surfaces	Gouging	Fig
0.5	0.88	0	1	2.0	1.22	0	1
1.0	0.69	0	1	2.5	1.08	0	1
1.5	0.54	0	1	3.0	0.95	0	1
2.0	0.41	0.02	2	3.5	0.83	0.04	2

(mm) (mm)

■ Ramping/Helical Milling Upper Limit

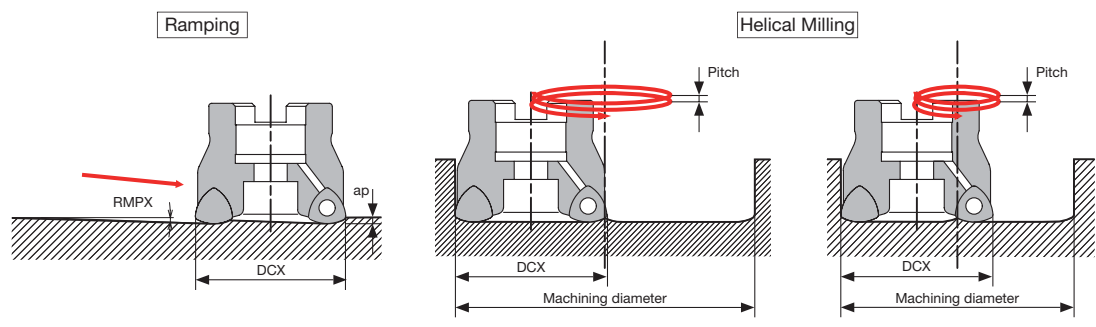

Precautions for Helical Milling

- Above the max. machining diameter, the centre uncut portion can be removed by traverse cutting with the same cutter.
- Below the min. machining diameter, the centre uncut portion cannot be removed with the same cutter.

	Max. Dia. DCX (mm)	Ramping		Helical Milling					
		Max. Ramping Angle RMPX (°)	Max. Machining Dia. (mm)	Max. Pitch (mm/rev)	Standard Diameter (mm)	Max. Pitch (mm/rev)	Min. Machining Dia. (mm)	Max. Pitch (mm/rev)	
DMSL type	16	0.6	31.3	0.6	24.4	0.3	23.8	0.25	
	18	0.8	35.3	0.8	28.3	0.4	27.2	0.3	
	20	1.0	39.3	1.0	32.3	0.6	30.5	0.3	
	22	1.0	43.3	1.0	36.3	0.7	34.3	0.3	
	25	1.0	49.3	1.0	42.3	0.9	39.9	0.3	
	26	1.0	51.3	1.0	44.3	0.9	41.8	0.3	
	28	0.9	55.3	1.0	48.2	0.9	45.7	0.3	
	30	0.8	59.3	1.0	52.2	1.0	49.6	0.3	
	32	0.7	63.3	1.0	56.2	1.0	53.6	0.3	
	35	0.6	69.3	1.0	62.2	1.0	59.5	0.3	
	40	0.5	79.3	1.0	72.2	1.0	69.6	0.3	
	42	0.5	83.3	1.0	76.2	1.0	73.5	0.3	
	50				Not recommended				
	52				Not recommended				
	63				Not recommended				
66				Not recommended					
80				Not recommended					

	Max. Dia. DCX (mm)	Ramping		Helical Milling					
		Max. Ramping Angle RMPX (°)	Max. Machining Dia. (mm)	Max. Pitch (mm/rev)	Standard Diameter (mm)	Max. Pitch (mm/rev)	Min. Machining Dia. (mm)	Max. Pitch (mm/rev)	
DMSW type	35	0.5	69.3	1.3	53.5	0.5	52.0	0.5	
	40	0.8	79.3	2.0	63.4	1.0	60.2	0.5	
	42	0.8	83.3	2.0	67.4	1.0	63.9	0.5	
	50	1.4	99.3	2.0	83.3	2.0	79.1	1.0	
	52	1.4	103.3	2.0	87.3	2.0	82.8	1.0	
	63	1.2	125.3	2.0	109.3	2.0	103.6	1.0	
	66	1.2	131.3	2.0	115.3	2.0	109.4	1.0	
	80	1.2	159.3	2.0	143.2	2.0	134.0	1.0	
	85	1.2	169.3	2.0	153.2	2.0	144.0	1.0	
	100	0.8	199.3	2.0	183.2	2.0	174.0	1.0	
	125				Not recommended				
	160				Not recommended				

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling


Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

MEMO

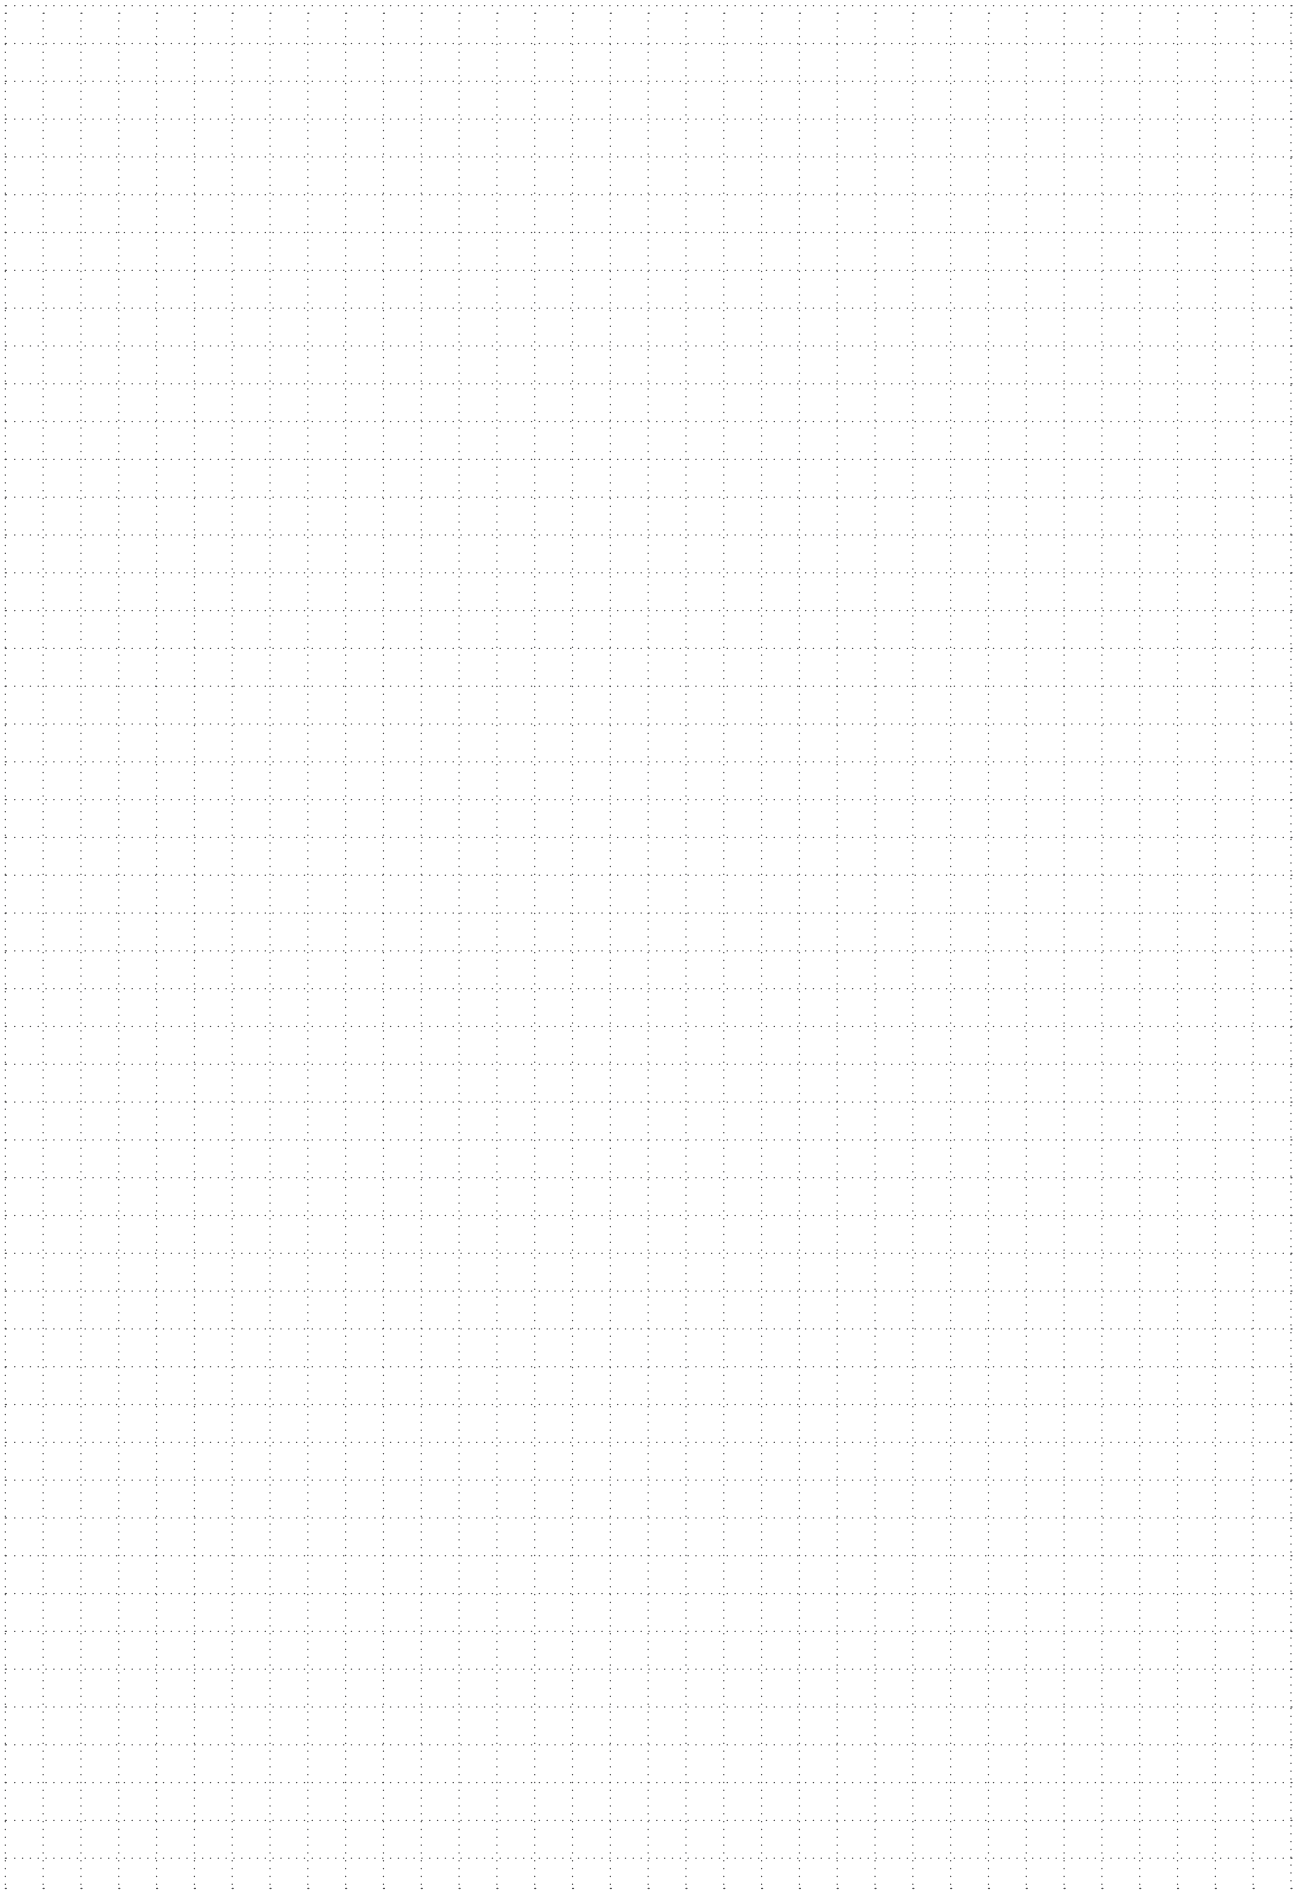

DMSL 06000R(S) type




New

Rake Angle	Radial	-8° to -12.5°
	Axial	-8°



Milling Cutters

H

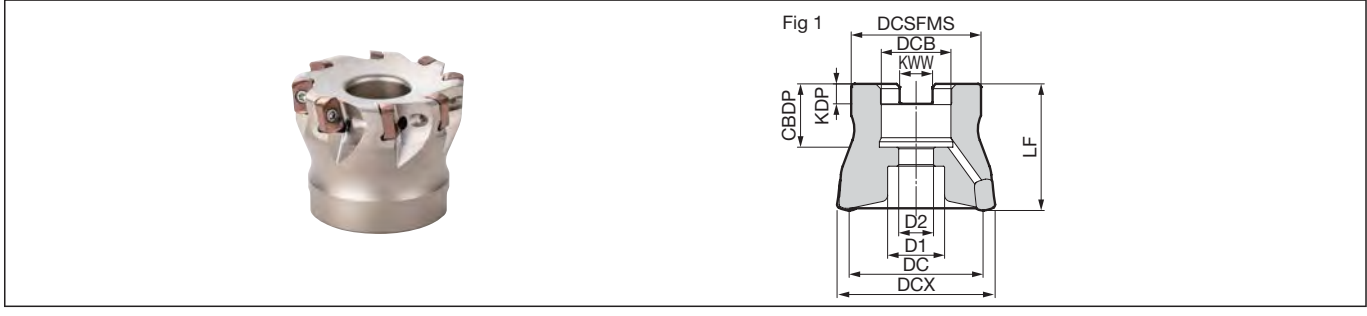

Body (Shell type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
DMSL 06040RS05	●	40	32.3	33	40	16	8.4	5.6	18	14	9	5	0.20	1
06040RS06	●	40	32.3	33	40	16	8.4	5.6	18	14	9	6	0.20	1
06042RS06		42	34.3	33	40	16	8.4	5.6	18	14	9	6	0.21	1
06050RS05	●	50	42.3	41	40	22	10.4	6.3	20	18	11	5	0.31	1
06050RS08	●	50	42.3	41	40	22	10.4	6.3	20	18	11	8	0.30	1
06052RS08		52	44.3	41	40	22	10.4	6.3	20	18	11	8	0.31	1
06063RS08		63	55.3	50	40	22	10.4	6.3	20	18	11	8	0.52	1
06066RS08-27		66	58.3	55	50	27	12.4	7	22	20	14	8	0.69	1
06080RS09		*80	72.3	55	50	27	12.4	7	22	20	14	9	0.94	1
DMSL 06050R05	●	50	42.3	41	40	22.225	8.4	5	20	18	11	5	0.32	1
06050R08	●	50	42.3	41	40	22.225	8.4	5	20	18	11	8	0.30	1
06063R08		63	55.3	50	40	22.225	8.4	5	20	18	11	8	0.53	1

Take note of the cutter mounting size (DCB) when selecting a cutter. Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Parts

Flat Insert Screw	Integrated Wrench	Anti-seizure Cream
BFTX02507IP	2.0	TRDR08IP SUMI-P

Identification Code


DMSL 06 066 R S 08-27
 Series Code Insert Size Max. Dia. Feed Direction Metric Bore Number of Teeth Mounting Size

New

Insert

Dimensions (mm)

Grade Classification		Coated Carbide											
Process	High-speed/Light Cutting											Corner Radius RE	Fig
	General-purpose												
	Roughing												
Cat. No.		ACU2500	XCU2500	ACP2000	ACP3000	ACK2000	ACK3000	XCS2000	ACS2500	ACS3000			
LNMU 06T3ZNER-G		●	●	●	●	●	●	●	●	●	1.0	1	



Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	General Steel	Below 280HB	100 - 160 - 250	1.0 - 1.5 - 2.0	ACU2500/ACP2000/ACP3000
	Alloy Steel	Below 280HB	100 - 160 - 200	1.0 - 1.5 - 1.8	
	Alloy Steel	Below 42HRC	100 - 150 - 180	0.8 - 1.0 - 1.2	
M	Stainless Steel	—	80 - 120 - 150	0.8 - 1.0 - 1.2	ACU2500/ACS2500/ACS3000
K	Cast Iron	—	100 - 160 - 250	1.0 - 1.5 - 1.8	ACU2500/ACK2000/ACK3000
S	Heat-Resistant Alloy	—	20 - 30 - 40	0.3 - 0.5 - 0.7	ACU2500/ACS2500/ACS3000
	Ti Alloy	—	30 - 50 - 70	0.4 - 0.6 - 0.8	
H	Hardened Steel	Below 52HRC	80 - 100 - 120	0.3 - 0.5 - 0.7	ACU2500/ACP3000

Note

- The above figures are guidelines for use with BT50 machine tools at depth of cut (ap) of 0.75mm.
- The above recommended cutting conditions may require adjustment depending on machine rigidity and work rigidity.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling



Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

DMSW 08000R(S) type

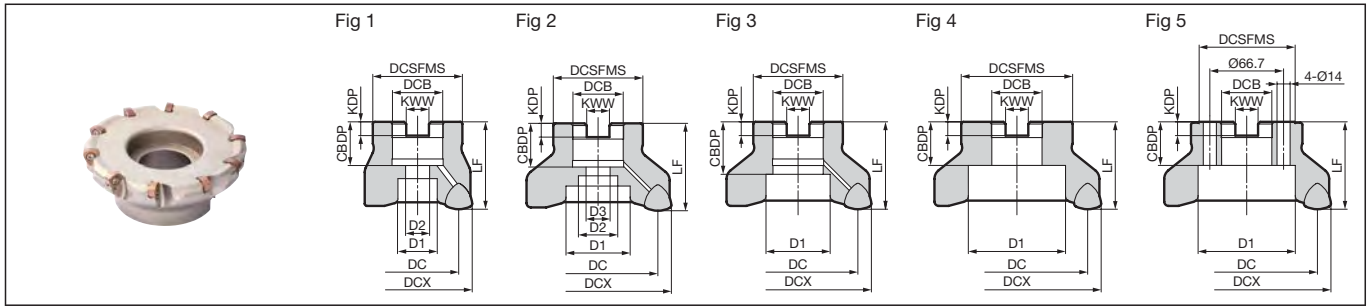

Body (Shell type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Bolt D3	Number of Teeth	Weight (kg)	Fig
DMSW 08050RS04	●	50	33.4	41	40	22	10.4	6.3	20	16.7	11	—	4	0.25	1
08050RS05	●	50	33.4	41	40	22	10.4	6.3	20	16.7	11	—	5	0.24	1
08052RS04	●	52	35.4	41	40	22	10.4	6.3	20	16.7	11	—	4	0.27	1
08052RS05	●	52	35.4	41	40	22	10.4	6.3	20	16.7	11	—	5	0.25	1
08063RS04	●	63	46.4	50	40	22	10.4	6.3	20	18	11	—	4	0.46	1
08063RS05	●	63	46.4	50	40	22	10.4	6.3	20	18	11	—	5	0.46	1
08063RS06	●	63	46.4	50	40	22	10.4	6.3	20	18	11	—	6	0.44	1
08063RS05-27	●	63	46.4	50	50	27	12.4	7	22	20	14	—	5	0.55	1
08063RS06-27	●	63	46.4	50	50	27	12.4	7	22	20	14	—	6	0.53	1
08066RS05-27	●	66	49.4	50	50	27	12.4	7	22	20	14	—	5	0.60	1
08066RS06-27	●	66	49.4	50	50	27	12.4	7	22	20	14	—	6	0.58	1
08080RS06	●	*80	63.3	55	50	27	12.4	7	22	20	14	—	6	0.88	1
08080RS08	●	*80	63.3	55	50	27	12.4	7	22	20	14	—	8	0.84	1
08085RS06	●	*85	68.3	55	50	27	12.4	7	22	20	14	—	6	1.01	1
08085RS08	●	*85	68.3	55	50	27	12.4	7	22	20	14	—	8	0.99	1
08100RS06	●	100	83.3	70	50	32	14.4	8	32	46	—	—	6	1.29	3
08125RS08	●	125	108.3	80	63	40	16.4	9	29	52	29	—	8	2.41	1
08160RS10	●	160	143.3	100	63	40	16.4	9	29	90	—	—	10	4.73	5
DMSW 08050R04	●	50	33.4	41	40	22.225	8.4	5	20	16.7	11	—	4	0.25	1
08050R05	●	50	33.4	41	40	22.225	8.4	5	20	16.7	11	—	5	0.24	1
08063R04	●	63	46.4	50	40	22.225	8.4	5	20	18	11	—	4	0.46	1
08063R05	●	63	46.4	50	40	22.225	8.4	5	20	18	11	—	5	0.46	1
08063R06	●	63	46.4	50	40	22.225	8.4	5	20	18	11	—	6	0.44	1
08080R06	●	*80	63.3	70	63	31.75	12.7	8	32	27	18	—	6	1.32	1
08080R08	●	*80	63.3	70	63	31.75	12.7	8	32	27	18	—	8	1.28	1
08100R06	●	*100	83.3	70	63	31.75	12.7	8	32	46	27	18	6	1.75	2
08125R08	●	125	108.3	80	63	38.1	15.9	10	35.5	55	30	—	8	2.55	1
08160R10	●	160	143.3	100	63	50.8	19.1	11	38	72	—	—	10	4.18	4

Take note of the cutter mounting size (DCB) when selecting a cutter. Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hexagonal socket bolt (metric specification: M12 x 30 to 35mm, inch specification: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Parts

Applicable Cutter	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Anti-seizure Cream
	Illustration	Torque (N·m)		Handle Grip	Bit	
DMSW08160R(S)10 Other than above	BFTX0513IP	5.0	TRDR20IP	HPL2025	TRB20IP	SUMI-P

Identification Code

DMSW 08 063 R S 05 - 27

Series Code Insert Size Max. Dia. Feed Direction Metric Bore Number of Teeth Mounting Size

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


Expansion

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Inscribed Circle IC	Thickness S	Corner Radius RE	Fig	
Process		K	P	K	P	K	P	K	P					
	High-speed/Light Cutting													
	General-purpose													
	Roughing													
Cat. No.		ACU2500	XCU2500	ACP2000	ACP3000	ACK2000	ACK3000	XCS2000	ACS2500	ACS3000				
WNUMU 0807ZNER-L <i>New</i>		●	●	●				●	●	●	13	7	1.6	1
WNUMU 0807ZNER-G		●	●	●	●	●	●	●	●	●	13	7	1.6	1
WNUMU 0807ZNER-H <i>New</i>		●	●	●				●	●	●	13	7	1.6	1

Fig 1



Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	General Steel	Below 280HB	100 - 160 - 250	1.0 - 1.5 - 2.0	ACU2500/ACP2000/ACP3000
	Alloy Steel	Below 280HB	100 - 160 - 200	1.0 - 1.5 - 1.8	
	Alloy Steel	Below 42HRC	100 - 150 - 180	0.8 - 1.0 - 1.2	
M	Stainless Steel	—	80 - 120 - 150	0.8 - 1.0 - 1.2	ACU2500/ACS2500/ACS3000
K	Cast Iron	—	100 - 160 - 250	1.0 - 1.5 - 1.8	ACU2500/ACK2000/ACK3000
S	Heat-Resistant Alloy	—	20 - 30 - 40	0.3 - 0.5 - 0.7	ACU2500/ACS2500/ACS3000
	Ti Alloy	—	30 - 50 - 70	0.4 - 0.6 - 0.8	
H	Hardened Steel	Below 52HRC	80 - 100 - 120	0.3 - 0.5 - 0.7	ACU2500/ACP3000

Note

- The above figures are guidelines for use with BT50 machine tools at depth of cut (ap) of 1.5mm.
- The above recommended cutting conditions may require adjustment depending on machine rigidity and work rigidity.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

DMSL 06000E(L) type




New

Rake Angle	Radial	-12.5° to -16.5°
	Axial	-8°



Milling Cutters

H

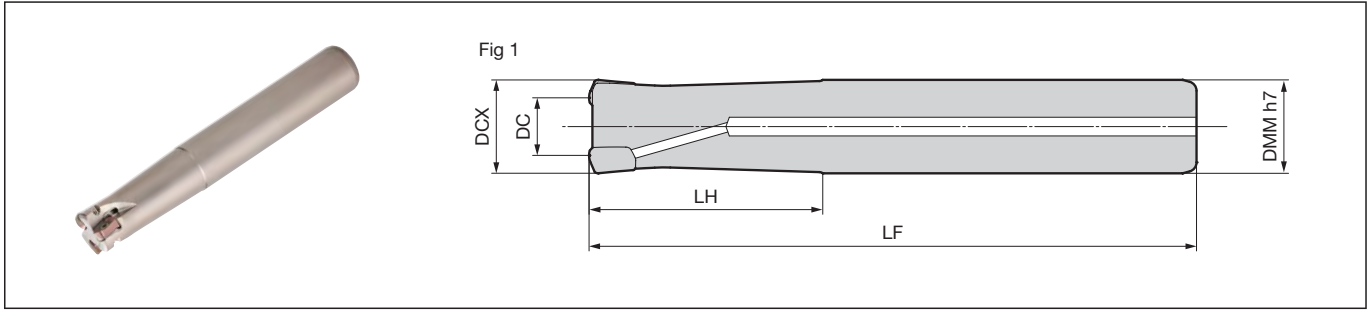

Face Milling

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
DMSL 06016E02	●	16	8.4	16	30	110	2	0.15	1
06018E02	●	18	10.4	16	30	110	2	0.15	1
06020E03	●	20	12.4	20	50	130	3	0.27	1
06020E04	●	20	12.4	20	50	130	4	0.27	1
06022E03	●	22	14.3	20	50	130	3	0.29	1
06022E04	●	22	14.3	20	50	130	4	0.29	1
06025E04	●	25	17.3	25	60	140	4	0.46	1
06025E05	●	25	17.3	25	60	140	5	0.46	1
06028E04	●	28	20.3	25	60	140	4	0.49	1
06028E05	●	28	20.3	25	60	140	5	0.48	1
06030E05	●	30	22.3	32	70	150	5	0.81	1
06032E05	●	32	24.3	32	70	150	5	0.82	1
06032E06	●	32	24.3	32	70	150	6	0.82	1
06035E05	●	35	27.3	32	50	150	5	0.88	1
06040E06	●	40	32.3	32	50	150	6	0.91	1

Shoulder Milling

High-Feed

Multi-purpose

Radius

Body (Long Shank type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
DMSL 06016EL02	●	16	8.4	16	70	150	2	0.19	1
06018EL02	●	18	10.4	16	50	150	2	0.21	1
06020EL03	●	20	12.4	20	80	160	3	0.33	1
06022EL03	●	22	14.3	20	60	160	3	0.36	1
06025EL04	●	25	17.3	25	100	170	4	0.54	1
06028EL04	●	28	20.3	25	60	170	4	0.60	1
06030EL05	●	30	22.3	32	120	200	5	1.01	1
06032EL05	●	32	24.3	32	120	200	5	1.06	1
06035EL05	●	35	27.3	32	60	210	5	1.21	1
06040EL06	●	40	32.3	32	60	210	6	1.24	1

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Parts

Flat Insert Screw	Integrated Wrench	Anti-seizure Cream
BFTX02507IP	2.0	TRDR08IP SUMI-P

Non-Ferrous Metals

Cast Iron, High-Speed

Identification Code


DMSL 06 025 E L 04
 Series Code Insert Size Max. Dia. Shank type Long Number of Teeth

New

Insert

Dimensions (mm)

Grade Classification		Coated Carbide								Corner Radius RE	Fig
Process	High-speed/Light Cutting	P	M	K	S	H	P	M	K		
	General-purpose	P	M	K	S	H	P	M	K	S	H
	Roughing	P	M	K	S	H	P	M	K	S	H
Cat. No.		ACU2500	XCU2500	ACP2000	ACP3000	ACK2000	ACK3000	XCS2000	ACS2500	ACS3000	
LNMU 06T3ZNER-G		●	●	●	●	●	●	●	●	●	
										1.0	1



Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	General Steel	Below 280HB	100 - 160 - 250	1.0 - 1.5 - 2.0	ACU2500/ACP2000/ACP3000
	Alloy Steel	Below 280HB	100 - 160 - 200	1.0 - 1.5 - 1.8	
	Alloy Steel	Below 42HRC	100 - 150 - 180	0.8 - 1.0 - 1.2	
M	Stainless Steel	—	80 - 120 - 150	0.8 - 1.0 - 1.2	ACU2500/ACS2500/ACS3000
K	Cast Iron	—	100 - 160 - 250	1.0 - 1.5 - 1.8	ACU2500/ACK2000/ACK3000
S	Heat-Resistant Alloy	—	20 - 30 - 40	0.3 - 0.5 - 0.7	ACU2500/ACS2500/ACS3000
	Ti Alloy	—	30 - 50 - 70	0.4 - 0.6 - 0.8	
H	Hardened Steel	Below 52HRC	80 - 100 - 120	0.3 - 0.5 - 0.7	ACU2500/ACP3000

Note

- The above figures are guidelines for use with BT50 machine tools at depth of cut (ap) of 0.75mm.
- The above recommended cutting conditions may require adjustment depending on machine rigidity and work rigidity.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


DMSW 08000E(L) type



Rake Angle	Radial	-10° to -13°
	Axial	-6°

Milling Cutters

H

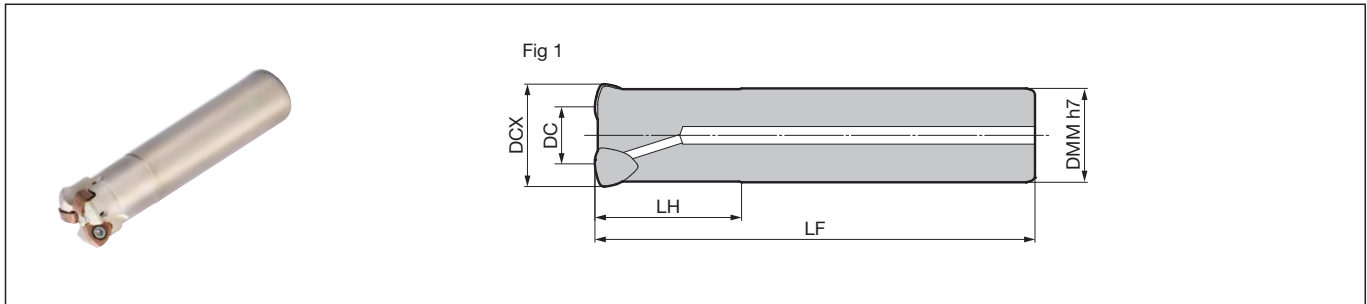

Face Milling

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
DMSW 08035E02	●	35	18.6	32	50	150	2	0.85	1
08040E03	●	40	23.5	32	50	150	3	0.86	1
08050E03-42	●	50	33.4	42	50	150	3	1.51	1
08063E04-42	●	63	46.4	42	50	150	4	1.66	1

Inserts are sold separately.
 Note: The values in red have been changed from the 2021-2022 General Catalogue.

Shoulder Milling

High-Feed

Body (Long Shank type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
DMSW 08035EL02	●	35	18.6	32	60	210	2	1.21	1
08040EL03	●	40	23.5	32	60	210	3	1.22	1
08050EL03-42	●	50	33.4	42	50	250	3	2.54	1
08063EL04-42	●	63	46.4	42	50	250	4	2.68	1

Inserts are sold separately.
 Note: The values in red have been changed from the 2021-2022 General Catalogue.

Multi-purpose

Radius

Parts

Flat Insert Screw	Integrated Wrench	Anti-seizure Cream
BFTX0513IP	5.0	SUMI-P

Identification Code

DMSW 08 050 E L 03 - 42

Series Code Insert Size Max. Dia. Shank type Long Shank Number of Teeth Shank Dia.

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed




Insert

Dimensions (mm)

Grade Classification		Coated Carbide													
Process	High-speed/Light Cutting									Inscribed Circle IC	Thickness S	Corner Radius RE	Fig		
	General-purpose														
	Roughing														
Cat. No.		ACU2500	XCU2500	ACP2000	ACP3000	ACK2000	ACK3000	XCS2000	ACS2500	ACS3000					
WNMU 0807ZNER-L <small>New</small>		●	●	●	●	●	●	●	●	●	13	7	1.6	1	
WNMU 0807ZNER-G		●	●	●	●	●	●	●	●	●	13	7	1.6	1	
WNMU 0807ZNER-H <small>New</small>		●	●	●	●	●	●	●	●	●	13	7	1.6	1	

Fig 1



Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	General Steel	Below 280HB	100 - 160 - 250	1.0 - 1.5 - 2.0	ACU2500/ACP2000/ACP3000
	Alloy Steel	Below 280HB	100 - 160 - 200	1.0 - 1.5 - 1.8	
	Alloy Steel	Below 42HRC	100 - 150 - 180	0.8 - 1.0 - 1.2	
M	Stainless Steel	—	80 - 120 - 150	0.8 - 1.0 - 1.2	ACU2500/ACS2500/ACS3000
K	Cast Iron	—	100 - 160 - 250	1.0 - 1.5 - 1.8	ACU2500/ACK2000/ACK3000
S	Heat-Resistant Alloy	—	20 - 30 - 40	0.3 - 0.5 - 0.7	ACU2500/ACS2500/ACS3000
	Ti Alloy	—	30 - 50 - 70	0.4 - 0.6 - 0.8	
H	Hardened Steel	Below 52HRC	80 - 100 - 120	0.3 - 0.5 - 0.7	ACU2500/ACP3000

Note

- The above figures are guidelines for use with BT50 machine tools at depth of cut (ap) of 1.5mm.
- The above recommended cutting conditions may require adjustment depending on machine rigidity and work rigidity.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



■ Features


SEC-WaveMill WFXH types are high performance multi-functional cutters that use WFX series inserts to support roughing at high feed rates and other milling applications.

- (1) Stable, high-efficiency machining due to their superior sharpness
- (2) Various milling applications are supported (ramping, helical milling)
- (3) Various inserts for the WFX series can be used
- (4) Applicable to various work materials

In addition to the general-purpose grade ACU2500, applicable to various work materials, the new-generation coated carbide grades XCU2500/XCK2000 are applicable to a wide variety of machining

Modular type H269

Cutting force: High sharpness realises stable cutting

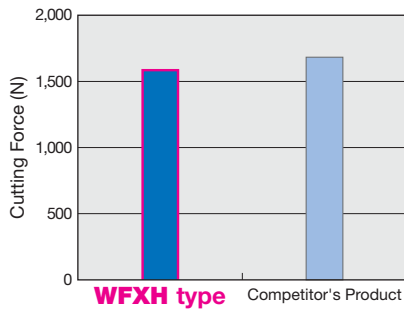

Work Material : S50C
 Tool : WFXH12063RS (5 fluted)
 Cutting Conditions : $v_c = 200\text{m/min}$, $f_z = 1.0\text{mm/t}$, $a_p = 0.5\text{mm}$, $a_e = 44\text{mm}$, Dry

Chips: Small and curled, low cutting temperatures


WFXH type
 (R1.6-G type Chipbreaker)



WFXH type



Competitor's Product A




Competitor's Product B

Work Material : S50C
 Tool : WFXH12063RS, SOMT120416PDER-G (ACP200)
 Cutting Conditions : $v_c = 200\text{m/min}$, $f_z = 1.0\text{mm/t}$, $a_p = 1\text{mm}$, $a_e = 35\text{mm}$, Dry

■ Chipbreaker Selection


Work Material	P M K S			N
Applications	Light Cutting, Low Rigidity Milling and Reduction of Burrs	Main Chipbreaker General-purpose to Interrupted Milling	Roughing, Heavy Interrupted Cutting and Hardened Steel Milling	For Non-Ferrous Metals
Features	Low Cutting Force	General-purpose type	High Strength type	Sharp Edge
Chipbreaker	L type	G type	H type	S type
08 Series Cross Section	0.05mm 	0.1mm 	0.15mm 	
12 Series Cross Section	0.05mm 	0.1mm 	0.2mm 	

■ Chipbreaker Selection Guide

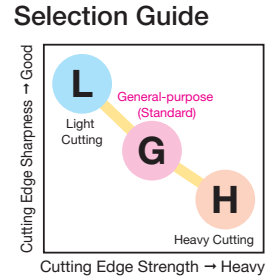

■ Precautions for Use (1) Precautions for corner milling

* Corners will have unmachined surfaces or gouges with respect to the expected corner profile.

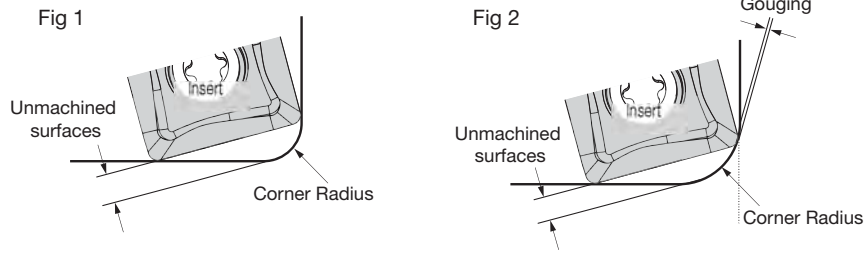

WFXH08000RS type

Dimensions (mm)


Corner Radius	SOMT080004-□ (RE0.4)			SOMT080008-□ (RE0.8)			SOMT080012-□ (RE1.2)		
	Unmachined surfaces	Gouging	Fig	Unmachined surfaces	Gouging	Fig	Unmachined surfaces	Gouging	Fig
2.0	1.41	0	1	1.30	0	1	1.21	0	1
2.5	1.30	0.02	2	1.19	0.01	2	1.09	0	1
3.0	—	—	—	—	—	—	0.98	0.05	2

WFXH12000RS type

Dimensions (mm)

Corner Radius	SOMT120004-□ (RE0.4)			SOMT120008-□ (RE0.8)			SOMT120012-□ (RE1.2)			SOMT120016-□ (RE1.6)		
	Unmachined surfaces	Gouging	Fig	Unmachined surfaces	Gouging	Fig	Unmachined surfaces	Gouging	Fig	Unmachined surfaces	Gouging	Fig
2.0	2.58	0	1	2.48	0	1	2.37	0	1	2.25	0	1
2.5	2.47	0	1	2.37	0	1	2.25	0	1	2.14	0	1
3.0	2.36	0	1	2.26	0	1	2.14	0	1	2.11	0	1
3.5	2.24	0.01	2	2.14	0	1	2.03	0	1	1.91	0	1
4.0	—	—	—	2.03	0.04	2	1.91	0.03	2	1.8	0.01	2

■ Precautions for Use (2) The cutting diameter DC differs depending on the insert used. We recommend using WFXH type with large corner radius inserts.

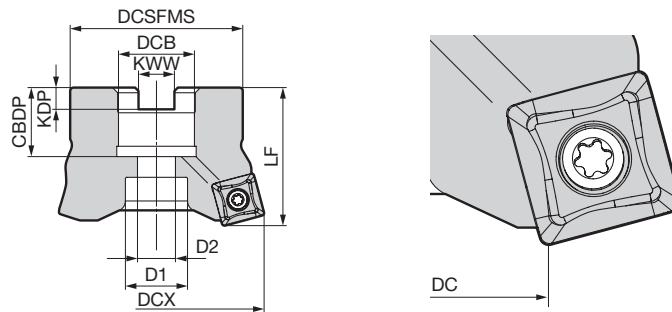

Body Cat. No.	DCX	DC			
		R0.4	R0.8	R1.2	R1.6
* WFXH 08025M12Z2	25	10.4	10.9	11.5	—
* 08032M12Z3	32	17.4	17.9	18.5	—
WFXH 08040RS	40	25.4	25.9	26.5	—
08050RS	50	35.4	35.9	36.5	—
08050RS-Z6	50	35.4	35.9	36.5	—
08063RS	63	48.4	48.9	49.5	—
* WFXH 12040M12Z3	40	16.6	17.1	17.5	18.1
* WFXH 12050RS	50	26.6	27.2	27.7	28.2
12063RS	63	39.5	40.0	40.4	41.1

* mark: Modular Tools H269

Helical Milling and Ramping

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling


Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Helical Milling

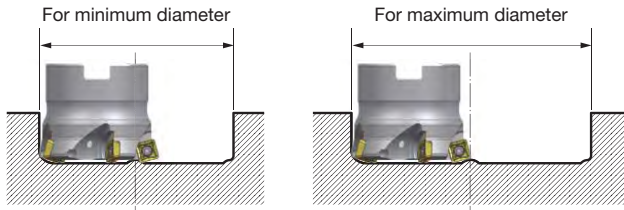


Ramping



Insert Cat. No.	DC	Helical Milling (mm)		Ramping
		Min. Dia.	Max. Dia.	Maximum Ramp Angle
SOMT080004-□	25	35	49	1.5°
	32	49	63	0.5°
	40	65	79	0.5°
	50	Impossible	Impossible	Impossible
	63	Impossible	Impossible	Impossible
SOMT080008-□	25	35	48	3°
	32	49	62	1.5°
	40	65	78	1.0°
	50	85	98	0.5°
	63	111	124	0.5°
SOMT080012-□	25	34	47	4.5°
	32	48	61	2.5°
	40	64	77	1.5°
	50	84	97	1.0°
	63	110	123	0.5°

Insert Cat. No.	DC	Helical Milling (mm)		Ramping
		Min. Dia.	Max. Dia.	Maximum Ramp Angle
SOMT120004-□	40	56	79	1.0°
	50	76	99	0.5°
	63	Impossible	Impossible	Impossible
SOMT120008-□	40	56	78	1.5°
	50	76	98	1.0°
	63	102	124	0.5°
SOMT120012-□	40	55	77	2.5°
	50	75	97	1.5°
	63	101	123	1.0°
SOMT120016-□	40	55	76	3.5°
	50	75	96	2.0°
	63	101	122	1.5°

Maximum Depth of Cut when Plunging



Insert Cat. No.	Max. Depth of Cut ae(max)
SOMT08	6mm
SOMT12	10mm

Lower the feed rate when plunging.

Recommended Cutting Conditions


Work Material	Insert Grade	Cutting Speed vc(m/min)	Insert Cat. No.	ø25		ø32		ø40		ø50		ø63	
				ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)
P General Steel Below 200HB	ACU2500	100-150-200	SOMT08	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
	ACP200		SOMT12	—	—	—	—	1.0	1.0	1.0	1.0	1.0	1.0
P Alloy Steel Below 45HRC	XCU2500	80-130-180	SOMT08	0.7	0.8	0.7	0.8	0.7	0.8	0.7	0.8	0.7	0.8
			SOMT12	—	—	—	—	0.8	1.0	0.8	1.0	0.8	1.0
M Stainless Steel SUS304, etc.	ACU2500	80-120-150	SOMT08	0.8	0.7	0.8	0.7	0.8	0.7	0.8	0.7	0.8	0.7
	ACM300		SOMT12	—	—	—	—	1.0	0.8	1.0	0.8	1.0	0.8
K Cast Iron FC, FCD	ACU2500	100-150-200	SOMT08	0.8	1.0	0.8	1.0	0.8	1.0	0.8	1.0	0.8	1.0
	ACK200		SOMT12	—	—	—	—	1.0	1.2	1.0	1.2	1.0	1.2
H Hardened Steel Below 50HRC	XCU2500	40- 80-100	SOMT08	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
	XCK2000		SOMT12	—	—	—	—	0.6	0.8	0.6	0.8	0.6	0.8

- The above recommended cutting conditions may require adjustment depending on machine rigidity and work rigidity. The above figures are guidelines for use with BT50 machine tools.
- The above recommended cutting conditions assume a tool overhang length of L/D=3 (i.e. overhang length of 3 times tool diameter) or less. When tool overhang is more than L/D = 3 and less than or equal to L/D=5, settings should be adjusted to approximately 70 to 80% of those indicated in the above recommended cutting conditions (ap, fz). When tool overhang is more than L/D = 5 and less than or equal to L/D=8, settings should be adjusted to approximately 50 to 60% of those indicated in the above recommended cutting conditions (ap, fz).

WFXH 08000RS type



Rake Angle	Radial	-6°
	Axial	6°

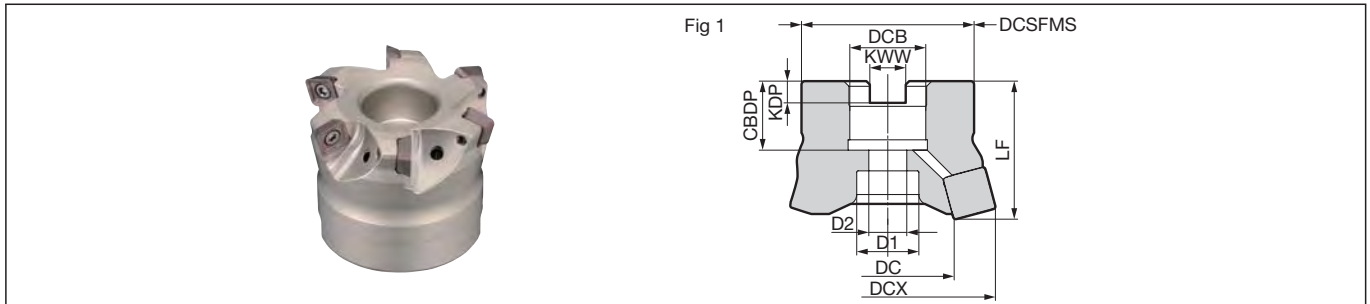

Body

Dimensions (mm)

Metric	Cat. No.	Stock	Max. Dia.	Dia.	Boss	Height	Hole Dia.	Keyway Width	Keyway Depth	Mounting Depth	Bolt	Bolt	Number of Teeth	Weight (kg)	Fig
			DCX	DC	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
	WFXH 08040RS	●	40	26.5	33	40	16	8.4	5.6	18	14	9	4	0.2	1
	08050RS	●	50	36.5	41	40	22	10.4	6.3	20	18	11	5	0.3	1
	08050RS-Z6	●	50	36.5	41	40	22	10.4	6.3	20	18	11	6	0.3	1
	08063RS	●	63	49.5	50	40	22	10.4	6.3	20	18	11	6	0.5	1

Inserts are sold separately.

* indicates value with corner radius 1.2 inserts mounted. Refer to H175 for details.

Insert

Dimensions (mm)

Process	Grade Classification		Coated Carbide							Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig		
	High-speed/Light Cutting	Medium Cutting	P	M	K	K	M	S	N	N	P					
	Medium Cutting	Roughing	P	M	K	K	M	S	N	N	P					
	Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A		
	SOMT 080304PZER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
	080308PZER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
	SOMT 080304PZER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
	080308PZER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
	080312PZER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
	SOMT 080308PZER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
	080312PZER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
	SOET 080304PZER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	0.4	1
	080308PZER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
	080312PZER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	1.2	1
	SOET 080302PZFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.2	1
	080304PZFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.4	1
	080308PZFR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1

* If the cutting edge strength for high-efficiency milling of non-ferrous metal is insufficient, try a G-type chipbreaker (ACK300).

Recommended Cutting Conditions H176

Precautions for Use H175

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	2.0	TRDR08IP SUMI-P

Identification Code


WFXH 08 040 RS - Z6

Series Code Insert Size Max. Dia. Metric Bore Fine Pitch type (with no. of teeth)

WFXH 12000RS type



Rake Angle	Radial Angle	-6°								
		6°		Face Milling	Shoulder Milling	Groove Milling	Ramping	Profiling	Plunge Milling	Helical Milling

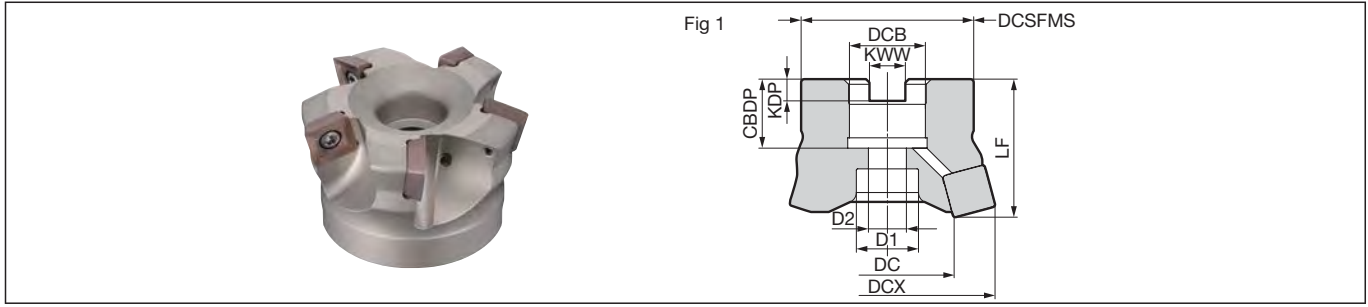

Body

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric WFXH 12050RS	●	50	28.2	41	40	22	10.4	6.3	20	18	11	4	0.3	1
12063RS	●	63	41.1	50	40	22	10.4	6.3	20	18	11	5	0.4	1


Inserts are sold separately.
* indicates value with corner radius 1.6 inserts mounted. Refer to H175 for details.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet	Corner Radius RE	Fig		
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300			ACM200	ACM300
Process	High-speed/Light Cutting	Medium Cutting	Roughing	●	●	●	●	●	●	●	●	●	●		
Cat. No.	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A		
SOMT 120408PDER-L	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOMT 120404PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
120408PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
120412PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
120416PDER-G	●	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
SOMT 120408PDER-H	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOET 120408PDR-S	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1

Fig 1



* If the cutting edge strength for high-efficiency milling of non-ferrous metal is insufficient, try a G-type chipbreaker (ACK300).

Recommended Cutting Conditions H176

Precautions for Use H175

Parts


Flat Insert Screw	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit	
BFTX03512IP	3.0	HPS1015	TRB15IP SUMI-P

Identification Code

WFXH 12 050 RS

Series Code Insert Size Max. Dia. Metric Bore

MEMO

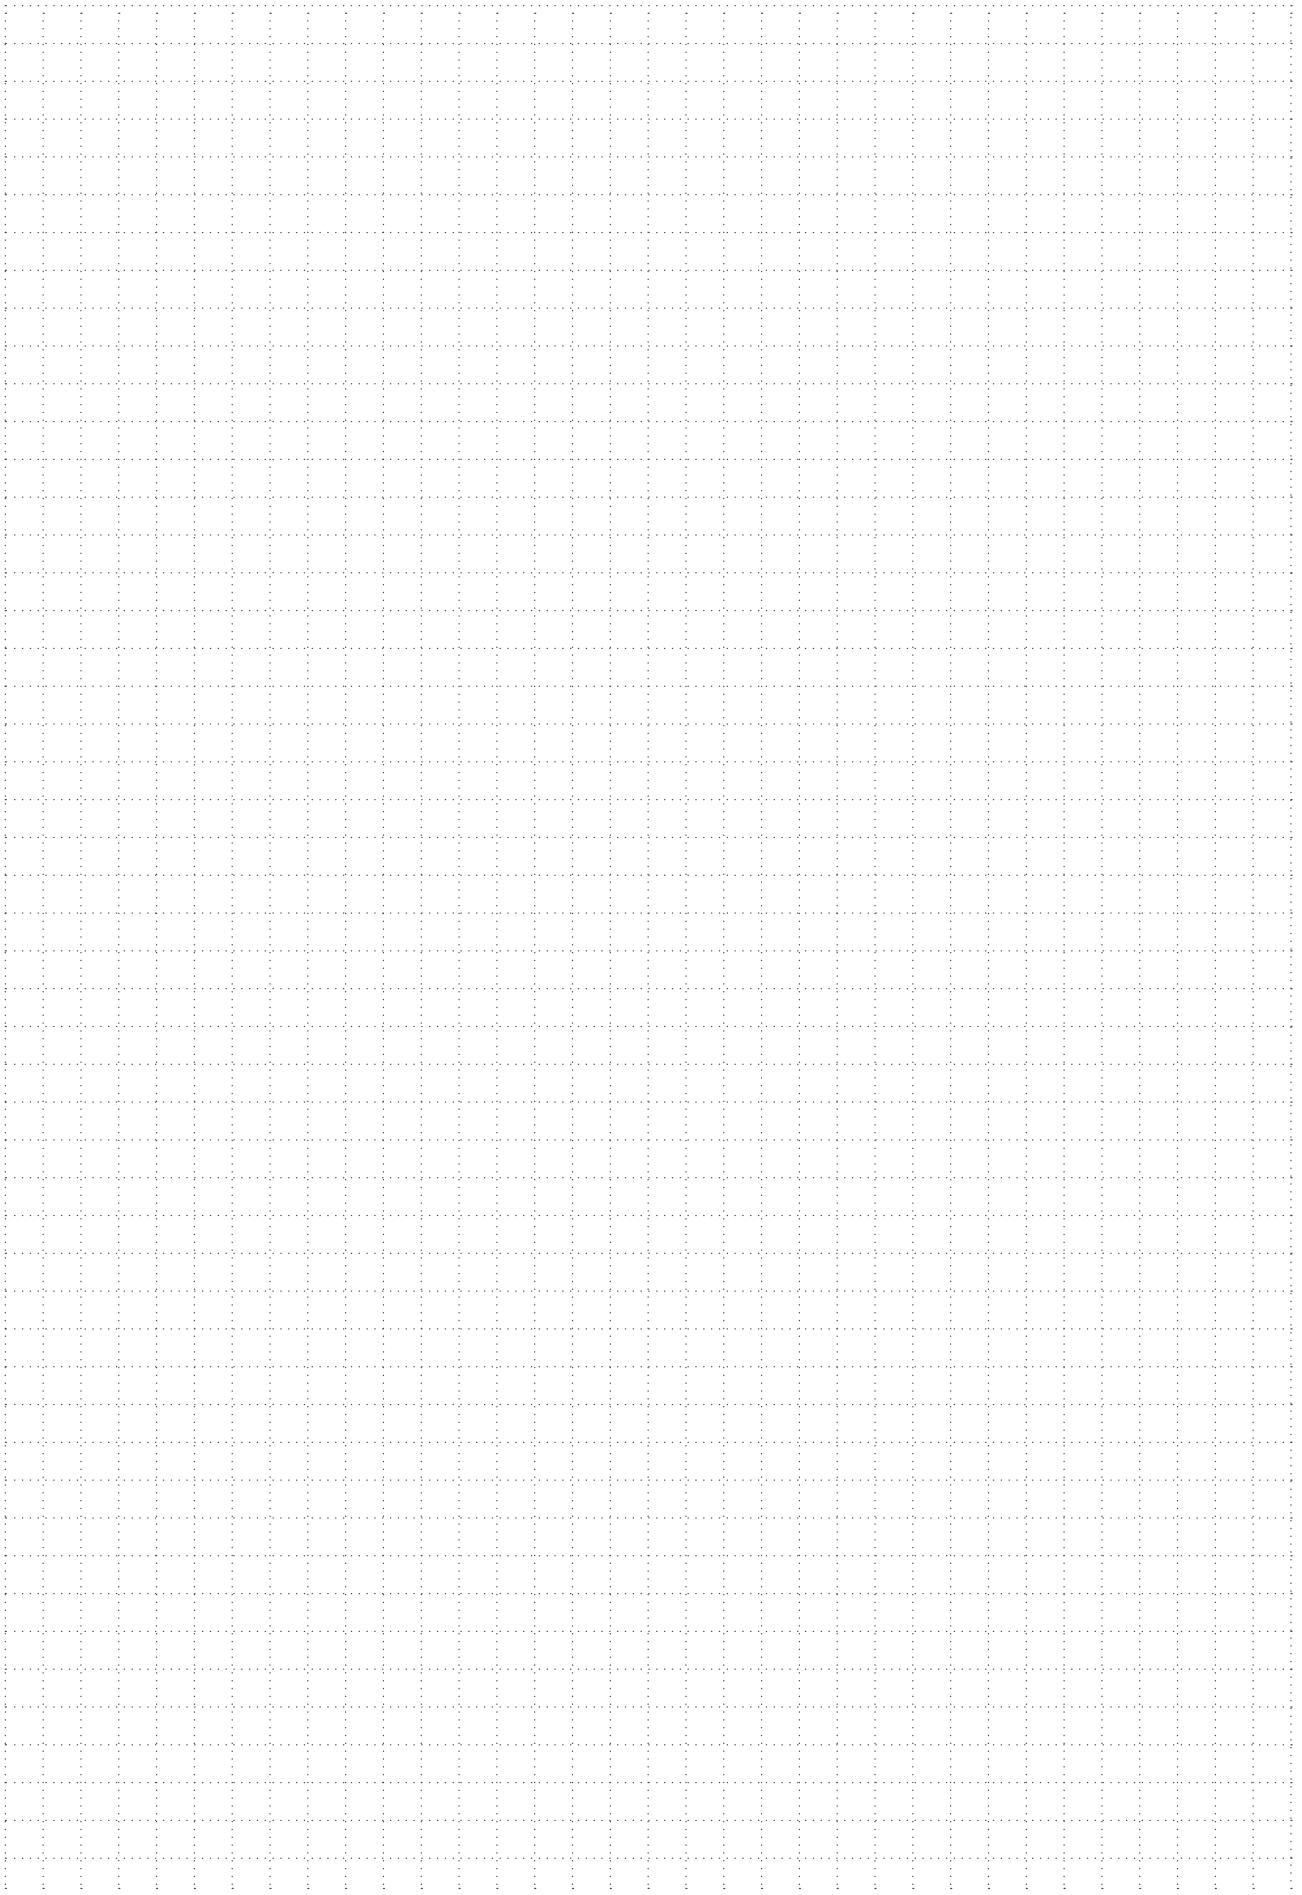

MSX series

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering


Non-Ferrous Metals

Cast Iron, High-Speed



■ Features



The SEC-Metal Slash Mill MSX type is a multi-purpose cutter capable of roughing at ultra-high feeds. Its wide application range dramatically boosts efficiency. Inserts are available in four sizes, ranging from $\phi 16$ mm to the large diameter $\phi 100$ mm model, to cover a wide variety of milling needs.

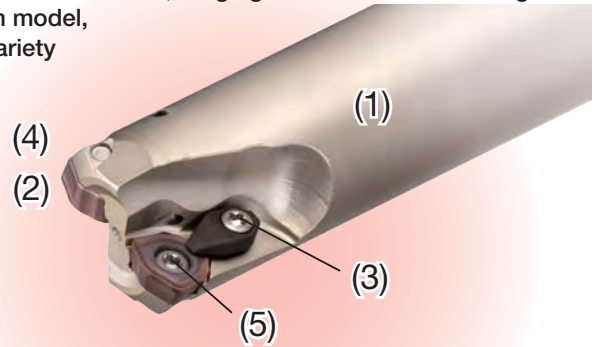

- (1) **Highly Durable Body** Special surface treatment improves scratch resistance
- (2) **Versatile Machining Operations** Enables ramping, helical milling, and drilling
- (3) **Double Clamp** Stable milling with a strong clamp is possible (Dia.22mm or smaller MSX06000 type and MSX08000 type cutters only use a single clamp)
- (4) **With Coolant Hole** Improved chip evacuation with air or coolant supply hole and specially shaped pocket design
- (5) **Insert Shape** Unique tool shape combines sharpness and cutting edge strength


■ Insert Applications and Types

- Insert utilises a special cutting edge profile
- Economical, three-cornered insert


Type	General-purpose type	Strong Edged
Applications	General Milling (First Recommendation)	Interrupted Cutting
Appearance / Features	 Sharper Edge	 Emphasis on Fracture Resistance

■ Cutting Performance

● Comparison of Cutting Force

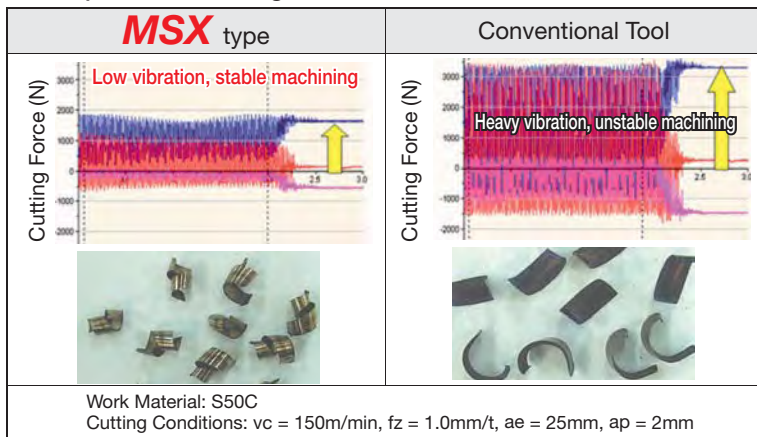

● Shoulder Milling Comparison of MSX type and Conventional Tool

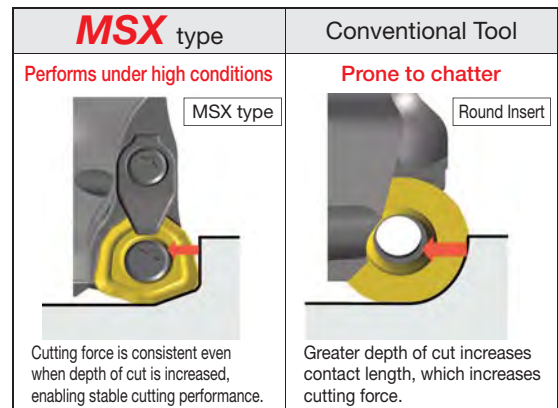

■ Product Range


Type	Cat. No.	Max. Diameter (mm)														Applicable Inserts	
		$\phi 16$	$\phi 17$	$\phi 18$	$\phi 20$	$\phi 22$	$\phi 25$	$\phi 28$	$\phi 30$	$\phi 32$	$\phi 35$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$		$\phi 100$
Shell	MSX 08000RS											4					WDMT 08 type
	MSX 12000RS												4	5			WDMT 12 type
	MSX 14000R <small>Inch</small>														5	6	WDMT 14 type
	MSX 14000RS												3	4	5	6	WDMT 14 type
Shank	MSX 06000E(S/M)	2	2	2	3	3	3										WDMT 06 type
	MSX 08000E(S/M)				2	2	2	2		3	3						WDMT 08 type
	MSX 12000E(S/M)								2	2	3	4					WDMT 12 type
	MSX 14000E(S/M)										2	3	4				WDMT 14 type
Modular	MSX 06000M	2		2	3	3	3										WDMT 06 type
	MSX 08000M					2	2	3	3	3							WDMT 08 type
	MSX 12000M								2	2	3						WDMT 12 type

Number in ●●● shows the number of teeth Inch Bore

Modular type H270

Precautions for Corner Finishing


* Corners will have unmachined surfaces or gouges with respect to the expected corner profile.

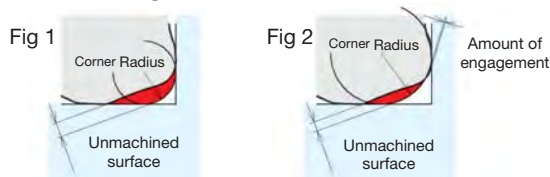

Corner Radius	MSX06000			MSX08000			MSX12000			MSX14000		
	Unmachined surface	Amount of engagement	Fig	Unmachined surface	Amount of engagement	Fig	Unmachined surface	Amount of engagement	Fig	Unmachined surface	Amount of engagement	Fig
2.0	0.403	0	1	0.735	0	1	1.312	0	1	1.642	0	1
2.5	0.263	0.087	2	0.593	0	1	1.171	0	1	1.501	0	1
3.0				0.451	0.031	2	1.030	0	1	1.360	0	1
3.5							0.888	0.001	2	1.219	0	1
4.0										1.078	0.016	2

(mm) (mm) (mm) (mm)

Ramping and Helical Milling

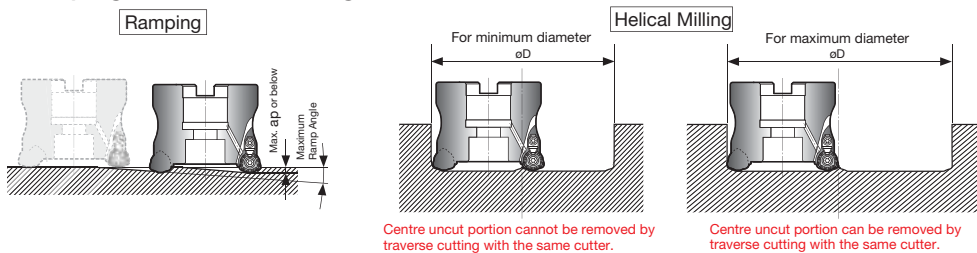

Centre uncut portion cannot be removed by traverse cutting with the same cutter.

Centre uncut portion can be removed by traverse cutting with the same cutter.

DC (mm)	MSX06000			MSX08000			MSX12000			MSX14000		
	Ramping (°)	Helical Milling (mm)		Ramping (°)	Helical Milling (mm)		Ramping (°)	Helical Milling (mm)		Ramping (°)	Helical Milling (mm)	
	Maximum Ramp Angle	Min. Dia.	Max. Dia.	Maximum Ramp Angle	Min. Dia.	Max. Dia.	Maximum Ramp Angle	Min. Dia.	Max. Dia.	Maximum Ramp Angle	Min. Dia.	Max. Dia.
16	6	21	30									
17	5	23	32									
18	4.5	25	34									
20	3.5	29	38	7.5	25	38						
22	3	33	42	5.5	29	42						
25	2	39	48	4	35	48						
28				3	41	54						
32				2.5	49	62	6.5	42	62			
35				2	55	68	5	48	68			
40				2	65	78	4	58	78	6	53	78
50							2.5	78	98	3.5	73	98
63							2	103	124	2	99	124
80										1.5	133	158
100										1	173	198

Recommended Cutting Conditions

Insert Cat. No.	Max. ap	RE	Approx. RE
WDMT 0603	1.0	1.5	2.0
WDMT 0804	1.5	2.0	2.5
WDMT 1205	2.0	2.0	3.0
WDMT 1406	2.5	2.0	3.5

(mm)

(ap Depth of Cut fz Feed Rate)

Work Material	Insert Grades	Cutting Speed vc (m/min)	Insert Cat. No.	Shank type								Shell type					
				ø16		ø20		ø25		ø32		ø40		ø50/ø63		ø80/ø100	
				ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)	ap (mm)	fz (mm/t)
General Steel Below 200HB	ACP200	100-150-200	WDMT 0603	0.8	0.8	0.8	0.8	—	—	—	—	—	—	—	—	—	—
			WDMT 0804	—	—	1.0	1.0	1.0	1.2	1.0	1.2	—	—	—	—	—	—
			WDMT 1205	—	—	—	—	—	—	1.2	1.4	1.2	1.4	1.2	1.4	—	—
			WDMT 1406	—	—	—	—	—	—	—	—	1.5	1.5	1.5	1.5	1.5	1.5
Alloy Steel Below 45HRC	ACP200	80-130-180	WDMT 0603	0.7	0.8	0.7	0.8	—	—	—	—	—	—	—	—	—	—
			WDMT 0804	—	—	0.8	1.0	0.8	1.2	0.8	1.2	—	—	—	—	—	—
			WDMT 1205	—	—	—	—	—	—	1.0	1.4	1.0	1.4	1.0	1.4	—	—
			WDMT 1406	—	—	—	—	—	—	—	—	1.3	1.5	1.3	1.5	1.3	1.5
Stainless Steel SUS304, etc.	ACP300	80-120-150	WDMT 0603	0.8	0.7	0.8	0.7	—	—	—	—	—	—	—	—	—	—
			WDMT 0804	—	—	1.0	0.8	1.0	0.8	1.0	0.8	—	—	—	—	—	—
			WDMT 1205	—	—	—	—	—	—	1.2	1.2	1.2	1.2	1.2	1.2	—	—
			WDMT 1406	—	—	—	—	—	—	—	—	1.5	1.3	1.5	1.3	1.5	1.3
Cast Iron FC, FCD	ACK200 ACK300	100-150-200	WDMT 0603	0.8	1.0	0.8	1.0	—	—	—	—	—	—	—	—	—	—
			WDMT 0804	—	—	1.0	1.2	1.0	1.4	1.0	1.4	—	—	—	—	—	—
			WDMT 1205	—	—	—	—	—	—	1.2	1.5	1.2	1.5	1.2	1.5	—	—
			WDMT 1406	—	—	—	—	—	—	—	—	1.5	1.8	1.5	1.8	1.5	1.8
Hardened Steel Below 50HRC	ACK200 ACK300	40-80-100	WDMT 0603	0.5	0.5	0.5	0.5	—	—	—	—	—	—	—	—	—	—
			WDMT 0804	—	—	0.5	0.6	0.5	0.8	0.5	0.8	—	—	—	—	—	—
			WDMT 1205	—	—	—	—	—	—	0.6	1.0	0.6	1.0	0.6	1.0	—	—
			WDMT 1406	—	—	—	—	—	—	—	—	1.0	1.2	1.0	1.2	1.0	1.2

The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


The above figures are guidelines for use with BT50 machine tools.

The above recommended cutting conditions assume a tool overhang length of L/D=3 (i.e. overhang length of 3 times tool diameter) or less.

When tool overhang is more than L/D = 3 and less than or equal to L/D=5, settings should be adjusted to approximately 70 to 80% of those indicated in the above recommended cutting conditions (ap, fz).


When tool overhang is more than L/D = 5 and less than or equal to L/D=8, settings should be adjusted to approximately 50 to 60% of those indicated in the above recommended cutting conditions (ap, fz).

MSX 08000RS/12000RS/14000R(S) type



Milling Cutters

H

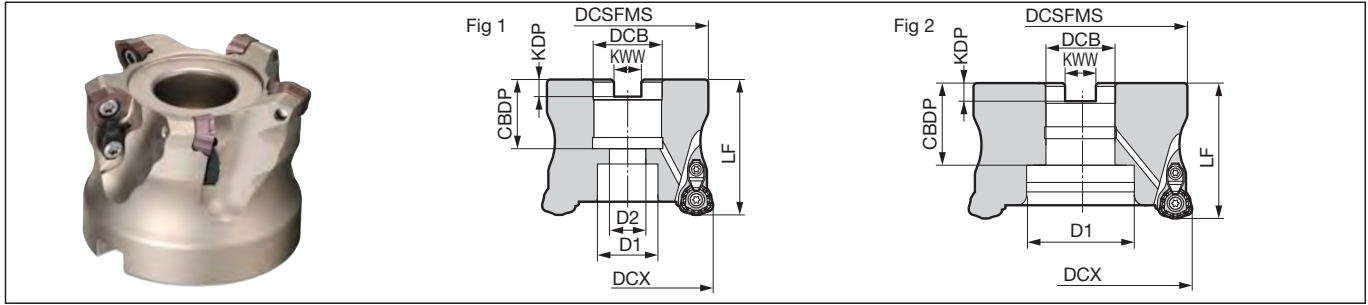

Face Milling

Body (Applicable Insert WDMT08 type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
MSX 08040RS	●	40	37	45	16	8.4	5.6	18	13.5	9	4	0.2	1

Shoulder Milling

Body (Applicable Insert WDMT12 type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
MSX 12050RS	●	50	47	50	22	10.4	6.3	20	18	11	4	0.3	1
12063RS	●	63	60	50	22	10.4	6.3	20	18	11	5	0.6	1

High-Feed

Body (Applicable Insert WDMT14 type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
MSX 14050RS	●	50	47	50	22	10.4	6.3	20	17	11	3	0.3	1
14063RS	●	63	60	50	22	10.4	6.3	20	18	11	4	0.6	1
14080RS	●	80	76	63	27	12.4	7.0	25	20	13.5	5	1.4	1
14100RS	●	100	96	63	32	14.4	8.5	32	44	—	6	2.2	2
MSX 14080R	●	80	76	63	31.75	12.7	8.0	32.5	28	17	5	1.3	1
14100R	●	100	96	63	31.75	12.7	8.0	32.5	28	17	6	2.4	1

Multi-purpose

Radius

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.


Radial/3D Profiling

Insert

Dimensions (mm)

Process	Grade Classification		Coated Carbide				Inscribed Circle IC	Thickness S	Corner Radius RE	Applicable Cutter	Fig
	High-speed/Light Cutting	General-purpose	ACP200	ACP300	ACK200	ACK300					
General-purpose	High-speed/Light Cutting						8.5	4.0	2.0	MSX08000R type	1
	General-purpose						12.0	5.0	2.0	MSX12000R type	1
	Roughing						14.0	6.0	2.0	MSX14000R type	1
Honed type	High-speed/Light Cutting						8.5	4.0	2.0	MSX08000R type	1
	General-purpose						12.0	5.0	2.0	MSX12000R type	1
	Roughing						14.0	6.0	2.0	MSX14000R type	1

Fig 1



Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Identification Code

Recommended Cutting Conditions **H181**



MSX 08 040 R S

Series Code MSX Max. Feed Metric 08 040 R S
Insert Size 08 Direction Bore S

Cast Iron, High-Speed

Parts

Applicable Cutter	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Clamp Plate	C-Ring	Cap Screw	Anti-seizure Cream
	Part	Torque (N·m)		Handle Grip	Bit				
MSX08000R type	BFTX0306IP	2.0	TRDR08IP	—	—	CCH3.5	CR03	BFTX03510IP08	SUMI-P
MSX12000R type	BFTX0409IP	3.0	—	HPS1015	TRB15IP	CCH3.5	CR03	BFTX03510IP15	
MSX14000R type	BFTX0511IP	5.0	—	HPL2025	TRB20IP	CCH4.5	CR03	BFTX04513IP20	

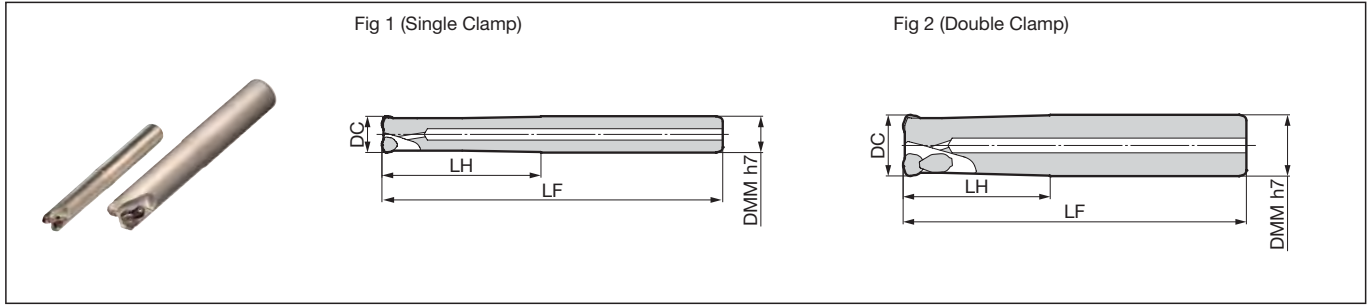

Body (Applicable Insert WDMT06 type) Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
MSX 06016ES	●	16	16	30	110	2	0.2	1
06016EM	●	16	16	70	150	2	0.2	1
06017EM	●	17	16	20	150	2	0.2	1
06018EM	●	18	16	20	150	2	0.2	1
06020ES	●	20	20	50	130	3	0.3	1
06020EM	●	20	20	100	180	3	0.4	1
06022EM	●	22	20	30	180	3	0.4	1
06025ES	●	25	25	60	140	3	0.5	1
06025EM	●	25	25	120	250	3	0.8	1

Body (Applicable Insert WDMT12 type) Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
MSX 12032ES	●	32	32	70	150	2	0.8	2
12032EM	●	32	32	120	250	2	1.4	2
12035EM	●	35	32	50	250	2	1.4	2
12040ES	●	40	32	50	150	3	0.9	2
12040EM	●	40	32	50	250	3	1.5	2
12050EM	●	50	42	50	250	4	2.6	2

Body (Applicable Insert WDMT08 type) Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
MSX 08020ES	●	20	20	50	130	2	0.3	1
08020EM	●	20	20	100	180	2	0.3	1
08022EM	●	22	20	30	180	2	0.4	1
08025ES	●	25	25	60	140	2	0.4	2
08025EM	●	25	25	120	250	2	0.8	2
08028EM	●	28	25	40	250	2	0.9	2
08032ES	●	32	32	70	150	3	0.8	2
08032EM	●	32	32	120	250	3	1.4	2
08035EM	●	35	32	50	250	3	1.5	2


Body (Applicable Insert WDMT14 type) Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
MSX 14040ES	●	40	32	50	150	2	0.9	2
14040EM	●	40	32	50	250	2	1.5	2
14050ES	●	50	42	50	150	3	1.5	2
14050EM	●	50	42	50	250	3	2.5	2
14063ES	●	63	42	50	150	4	1.7	2
14063EM	●	63	42	50	250	4	2.8	2

Inserts are sold separately.

Insert

Grade Classification		Coated Carbide								
Process	High-speed/Light Cutting									
	General-purpose									
	Roughing									
Applications	Cat. No.	ACP200	ACP300	ACK200	ACK300	Inscribed Circle IC	Thickness S	Corner Radius RE	Applicable Cutter	Fig
General-purpose	WDMT 0603ZDTR	●	●	●	●	6.35	3.0	1.5	MSX06000E type	1
	0804ZDTR	●	●	●	●	8.5	4.0	2.0	MSX08000R type	1
	1205ZDTR	●	●	●	●	12.0	5.0	2.0	MSX12000R type	1
	1406ZDTR	●	●	●	●	14.0	6.0	2.0	MSX14000R type	1
Honed type	WDMT 0603ZDTR-H	●	●	●	●	6.35	3.0	1.5	MSX06000E type	1
	0804ZDTR-H	●	●	●	●	8.5	4.0	2.0	MSX08000R type	1
	1205ZDTR-H	●	●	●	●	12.0	5.0	2.0	MSX12000R type	1
	1406ZDTR-H	●	●	●	●	14.0	6.0	2.0	MSX14000R type	1



Identification Code

MSX 06 016 E S

Series Code MSX Insert Size 06 Max. Dia. 016 Shank type E S: Short type M: Medium

Parts

Applicable Cutter	Flat Insert Screw		Wrench	Clamp Plate	C-Ring	Cap Screw	Anti-seizure Cream
MSX06000E type	BFTX02505IP	1.5	TRDR08IP	—	—	—	SUMI-P
MSX08020E, MSX08022E type	BFTX0306IP	2.0	TRDR08IP	—	—	—	
Other MSX08000E types not described above	BFTX0306IP	2.0	TRDR08IP	CCH3.5	CR03	BFTX03510IP08	
MSX12000E type	BFTX0409IP	3.0	TRDR15IP	CCH3.5	CR03	BFTX03510IP15	
MSX14000E type	BFTX0511IP	5.0	TRDR20IP	CCH4.5	CR03	BFTX04513IP20	

Milling Cutters
Face Milling
Shoulder Milling
High-Feed
Multi-purpose
Radius
Radial/3D
Side Cutters
T-Slot Cutters
Chamfering
Non-Ferrous Metals
Cast Iron, High-Speed

SEC-WaveMulti WMM series

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters
T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron,
High-Speed




■ Features

A multi-functional cutter that performs a variety of operations such as groove milling, shoulder milling, ramping, pocketing, drilling, helical milling, etc., using WaveMill inserts.

With low cutting force and excellent chip evacuation, it is also effective for consolidating tools.

- The WMM type alone can perform a number of operations such as shoulder milling, groove milling and drilling
- Excellent for high-efficiency ramping, helical drilling and pocketing
- Uses WaveMill inserts for sharpness and cutting edge strength
- The reduction in cutting force enables the same chip evacuation as conventional tools but with less force required
- Easy tool management as only 1 type of insert is used
- Also ideal for stainless steel machining

● WMM type insert arrangement

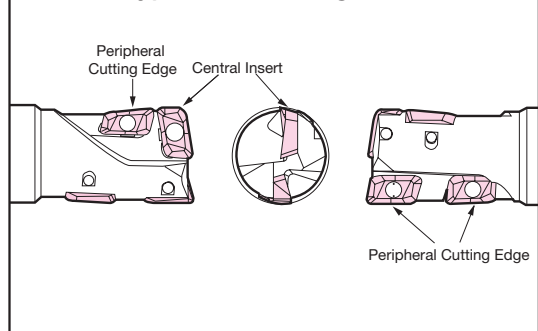

■ Applications: WMM2025E


<p>● Shoulder Milling</p> <p>SUS304</p> <p>Cuts stainless steel too</p> <p>Diameter of Tool: ø25 Insert: APMT103504PDER (ACZ350) Depth of Cut: ap = 25mm, ae = 5mm Cutting Speed: vc = 120m/min, Feed Rate: fz = 0.15mm/t Air Blow</p>	<p>● Groove Milling</p> <p>FC250</p> <p>Deep groove milling can be performed easily. Easy chip removal</p> <p>Diameter of Tool: ø25 Insert: APMT103504PDER (ACZ310) Depth of Cut: ap = 15mm, ae = 25mm Cutting Speed: vc = 180m/min, Feed Rate: fz = 0.12mm/t Air Blow</p>	<p>● Ramping</p> <p>S50C Block Material</p> <p>Capable of ramping without prepared holes</p> <p>Diameter of Tool: ø25 Insert: APMT103504PDER (ACZ350) Cutting Width: ae = 25mm, Depth: ap = 15mm Cutting Speed: vc = 200m/min, Feed Rate: fz = 0.1mm/t Ramp Angle: θ = 15° Air Blow</p>
<p>● Pocketing</p> <p>S50C Block Material</p> <p>Capable of traverse cutting and pocketing with continuous lateral feed from the initial drilling or ramping process</p> <p>Diameter of Tool: ø25 Insert: APMT103504PDER (ACZ350) Machining done continuously from a deep drilling process with a depth of 15mm Cutting Width: ae = 25mm, Depth ap = 15mm Cutting Speed: vc = 200m/min, Feed Rate: fz = 0.1mm/t Air Blow</p>	<p>● Drilling</p> <p>S50C Block Material</p> <p>Capable of easy chip evacuation and drilling without tool damage</p> <p>Diameter of Tool: ø25 Insert: APMT103504PDER (ACZ350) Hole Diameter: ø25mm, Depth: ap = 15mm Cutting Speed: vc = 200m/min, Feed Rate: f = 0.1mm/rev Step Feed: 0.5mm Air Blow</p>	<p>● Helical Milling</p> <p>S50C Block Material</p> <p>Capable of large boring with diameters 1.2-1.8 times the cutter diameter without prepared holes</p> <p>Diameter of Tool: ø25 Insert: APMT103504PDER (ACZ350) Hole Diameter: ø40mm, Depth: ap = 20mm Cutting Speed: vc = 300m/min, Feed Rate: f = 0.1mm/rev Axial Feed: 15mm/Pitch Air Blow</p>

■ Product Range and Performance

Shank Type	Cat. No.	Description	Dia. (mm)												
			ø20	ø21	ø22	ø24.7	ø25	ø26	ø27	ø28	ø30	ø32	ø33	ø35	ø40
WMM	2000E	Standard type	1	1			1	1			1				
	2000EL	Long type	1	1			1	1			1				
	2000ELH	Long type w/ Coolant Hole	1	1			1	1			1				
	2000EXLH	Extra-Long type w/ Coolant Hole			1				1		1				
	3000E	Standard type									1	1	1	1	
	3000EL	Long type									1	1	1	1	
	3000ELH	Long type w/ Coolant Hole									1	1	1	1	
	3000EXLH	Extra-Long type w/ Coolant Hole												1	1

Number in ● shows the number of teeth

● Performance Comparison (Groove Milling)

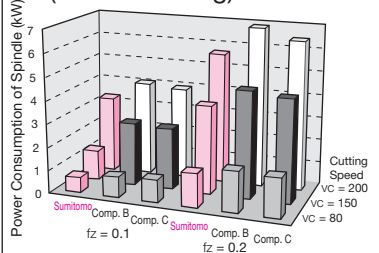



Diameter of Tool: ø25
Work Material: S50C
Cutting Conditions: vc = 80,150,200m/min, fz = 0.1, 0.2mm/t
ap = 15mm, Tool Overhang = 40mm

WMM 2000E/EL/ELH/EXLH type



Rake Angle	Radial	15° to 16°
	Axial	7° to 11°

17 to 35 mm
90°

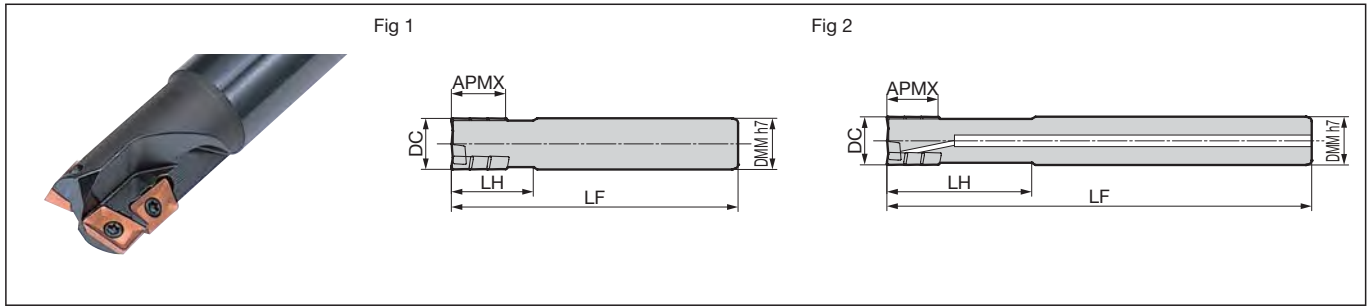

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	Effective No. of Teeth	Fig
WMM 2020E	●	20	17	20	35	130	3	1	2
2021E	●	21	17	20	35	130	3	1	1
2025E	●	25	26	25	40	140	4	1	2
2026E	●	26	26	25	40	140	4	1	1
2030E	●	30	35	25	50	150	5	1	1

Body (Long Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	Effective No. of Teeth	Fig
WMM 2020EL	●	20	17	20	60	185	3	1	2
2021EL	●	21	17	20	35	185	3	1	1
2025EL	●	25	26	25	75	220	4	1	2
2026EL	●	26	26	25	40	220	4	1	1
2030EL	●	30	35	25	50	230	5	1	1

Body (Long Shank type / With Coolant Holes)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	Effective No. of Teeth	Fig
WMM 2020ELH	●	20	17	20	60	185	3	1	2
2021ELH	●	21	17	20	35	185	3	1	2
2025ELH	●	25	26	25	75	220	4	1	2
2026ELH	●	26	26	25	40	220	4	1	2
2030ELH	●	30	35	25	50	230	5	1	2

Body (Extra Long Shank type / With Coolant Holes)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	Effective No. of Teeth	Fig
WMM 2022EXLH	●	22	17	20	35	250	3	1	2
2027EXLH	●	27	26	25	40	320	4	1	2
2030EXLH	●	30	35	25	50	350	5	1	2

Inserts are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.


Insert

Dimensions (mm)

Grade Classification		Coated Carbide			Cemented Carbide	DLC		
Process	High-speed/Light Cutting							
	General-purpose							
	Roughing							
Cat. No.		ACZ350	ACZ330	ACZ310	H	DL1000	Corner Radius RE	Fig
APMT 103504PDER		●	●	●	—	—	0.4	1
103508PDER		●	●	●	—	—	0.8	1
103512PDER		●	●	●	—	—	1.2	1
APMT 103504PDER-H		●	●	●	—	—	0.4	1
103508PDER-H		●	●	●	—	—	0.8	1
103512PDER-H		●	●	●	—	—	1.2	1
APET 103504PDER-F		●	●	●	—	—	0.4	1
APET 103504PDER-S		—	—	—	●	●	0.4	1

-H: Strong Edged, -F: Ground type Insert, -S: For Aluminum Alloy.

Fig 1



Parts (Common)

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
WMM2000 type	BFTX02506N	TRD08	SUMI-P
WMM3000 type	BFTX03584	TRD15	SUMI-P

Recommended Cutting Conditions Diameter ø20 to ø26mm (Not for extra-long type)

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades	
P	Carbon Steel	180 to 280HB	80- 120 -160	0.05- 0.13 -0.20	ACZ330	
						Groove Milling
						Drilling
M	Stainless Steel	—	80- 100 -120	0.05- 0.10 -0.15	ACZ350	
						Groove Milling
						Drilling
K	Cast Iron	250HB	70- 150 -180	0.05- 0.13 -0.20	ACZ310	
						Groove Milling
						Drilling
N	Aluminum Alloy	—	200- 300 -500	0.10- 0.15 -0.20	DL1000	
						Groove Milling
						Drilling

Note: The cutting conditions are guidelines. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


Recommended Cutting Conditions Diameter ø30 to ø40mm (Not for extra-long type)

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades	
P	Carbon Steel	180 to 280HB	80- 120 -160	0.05- 0.15 -0.25	ACZ330	
						Groove Milling
						Drilling
M	Stainless Steel	—	80- 100 -120	0.05- 0.13 -0.20	ACZ350	
						Groove Milling
						Drilling
K	Cast Iron	250HB	70- 150 -180	0.05- 0.15 -0.25	ACZ310	
						Groove Milling
						Drilling
N	Aluminum Alloy	—	200- 300 -500	0.10- 0.15 -0.20	DL1000	
						Groove Milling
						Drilling

Note: The cutting conditions are guidelines. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Recommended Tightening Torque (N-m)

WMM 3000E/EL/ELH/EXLH type

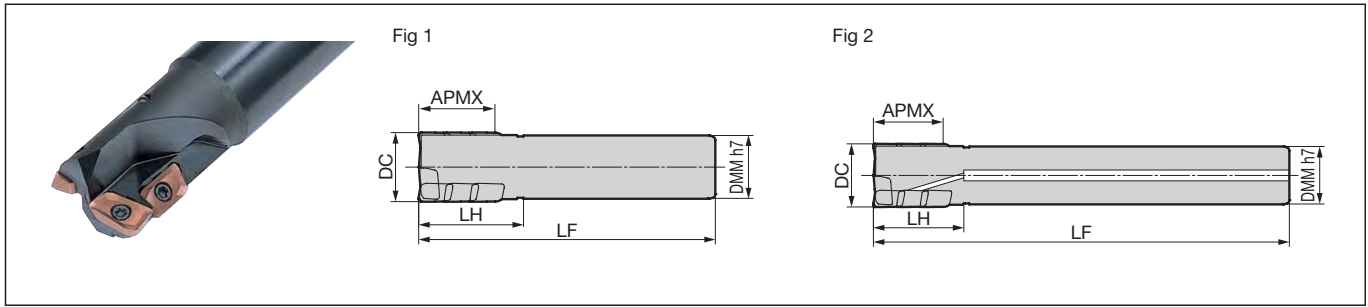

Body (Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	Effective No. of Teeth	Fig
WMM 3032E	●	32	39	32	50	150	4	1	2
3033E	●	33	39	32	50	150	4	1	1
3035E	●	35	39	32	50	150	4	1	1
3040E	●	40	39	32	55	160	4	1	1

Body (Long Shank type)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	Effective No. of Teeth	Fig
WMM 3032EL	●	32	39	32	90	230	4	1	2
3033EL	●	33	39	32	50	230	4	1	1
3035EL	●	35	39	32	50	230	4	1	1
3040EL	●	40	39	32	55	240	4	1	1

Body (Long Shank type / With Coolant Holes)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	Effective No. of Teeth	Fig
WMM 3032ELH	●	32	39	32	90	230	4	1	2
3033ELH	●	33	39	32	50	230	4	1	2
3035ELH	●	35	39	32	50	230	4	1	2
3040ELH	●	40	39	32	55	240	4	1	2

Body (Extra Long Shank type / With Coolant Holes)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Overall Length LF	Total No. of Teeth	Effective No. of Teeth	Fig
WMM 3035EXLH	●	35	39	32	50	370	4	1	2
3040EXLH	●	40	39	32	55	420	4	1	2


Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Dimensions (mm)

Grade Classification		Coated Carbide			Cemented Carbide	DLC	Corner Radius RE		Fig
Process	High-speed/Light Cutting								
	General-purpose								
	Roughing								
Cat. No.		ACZ350	ACZ330	ACZ310	H1	DL1000			
APMT 160508PDER	●	●	●	●	—	—	0.8		1
160512PDER	●	●	●	●	—	—	1.2		1
160516PDER	●	●	●	●	—	—	1.6		1
APMT 160508PDER-H	●	●	●	●	—	—	0.8		1
160512PDER-H	●	●	●	●	—	—	1.2		1
160516PDER-H	●	●	●	●	—	—	1.6		1
160520PDER-H*	●	●	●	●	—	—	2.0		1
160530PDER-H*	●	●	●	●	—	—	3.0		1
160540PDER-H*	●	●	●	●	—	—	4.0		1
160550PDER-H*	●	●	●	●	—	—	5.0		1
160560PDER-H*	●	●	●	●	—	—	6.0		1
APET 160508PDER-F	●	●	●	●	—	—	0.8		1
APET 160508PDRF-S	—	—	—	—	●	●	0.8		1

Fig 1

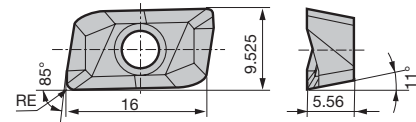

-H: Strong Edged, -F: Ground type Insert, -S: For Aluminum Alloy.

* marked inserts require modification of the cutter body. Correct the tool diameter by +0.5mm before use.

Parts


Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
WMM2000 type	BFTX02506N	1.5 TRD08	SUMI-P
WMM3000 type	BFTX03584	3.0 TRD15	SUMI-P

Recommended Cutting Conditions Diameter ø30 to ø40mm (Not for extra-long type)

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	80-120-160	Shoulder Milling	0.05-0.15-0.25
				Groove Milling	0.05-0.10-0.15
				Drilling	0.05-0.13-0.20
M	Stainless Steel	—	80-100-120	Shoulder Milling	0.05-0.13-0.20
				Groove Milling	0.05-0.09-0.12
				Drilling	0.05-0.12-0.18
K	Cast Iron	250HB	70-150-180	Shoulder Milling	0.05-0.15-0.25
				Groove Milling	0.05-0.10-0.15
				Drilling	0.05-0.13-0.20
N	Aluminum Alloy	—	200-300-500	Shoulder Milling	0.10-0.15-0.20
				Groove Milling	0.05-0.08-0.10
				Drilling	0.05-0.08-0.10

Note: The cutting conditions are guidelines. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

MEMO

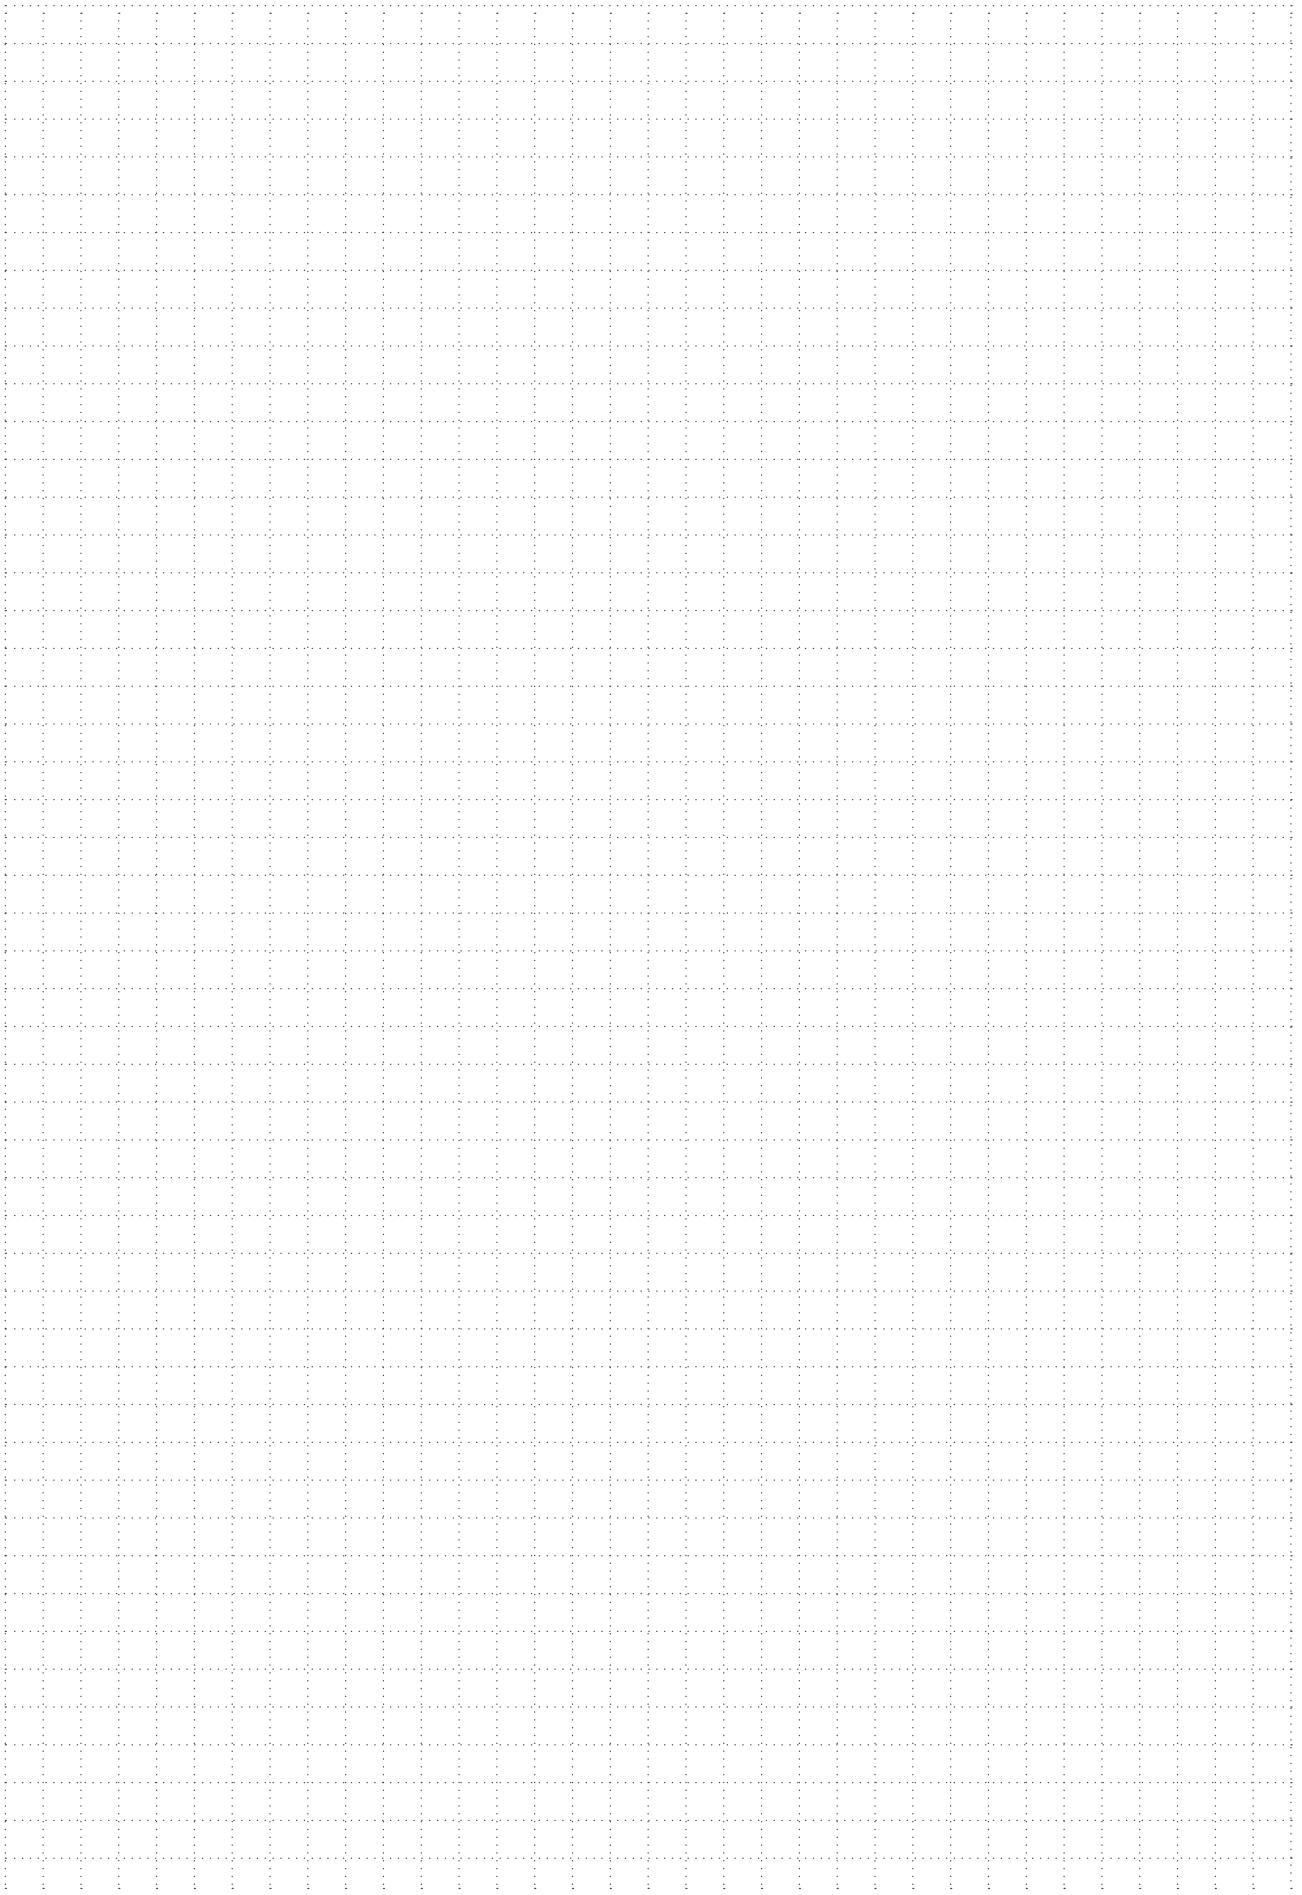

RSE series

New



■ Features


- High-efficiency, high-rigidity radius cutter
Wide insert seat face design achieves high efficiency machining of stainless steel etc.
Designed for superior durability
Ideal for roughing of aerospace components such as turbine blades
- Lineup of ground type and M class inserts
In addition to the 4-cornered ground type inserts, economical 8-cornered M Class inserts are also available
- Uses new grades for exotic alloy machining
New XCS2000/ACS2500/ACS3000 grades achieve stable and long tool life in machining exotic alloys, such as titanium alloys and Ni-based heat-resistant alloys, as well as stainless steel

■ High-rigidity clamp design

Wide Insert Seat Face Design



■ Cutter body can be shared by optimizing the locating surface design

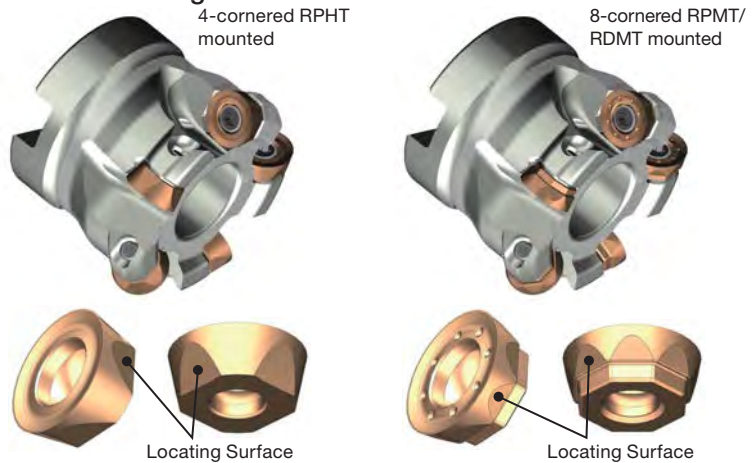

4-cornered ground type inserts or 8-cornered M Class inserts can be used on the same cutter body

■ Product Range

Type	Cat. No.	Max. Diameter (mm)							
		ø25	ø32	ø40	ø42	ø50	ø52	ø63	ø80
Shell	RSE 10000RS○○			5		6			
	RSE 12000RS○○			4	4	5 6	5	6	8
	RSE 12000R○○ <small>Inch</small>								8
Shank	RSE 10000E○○	2 3	3 4						

Number in ● shows the number of teeth Inch Inch Bore

■ Chipbreaker Shape

Work Material	M Stainless Steel, S Exotic Alloy
Applications	General-purpose to Roughing
Features	Standard
Chipbreaker	G type
Cutting Edge Cross Section	

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling



Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals




Cast Iron, High-Speed

■ Grade Features

Work Material	Grade	Coating Thickness (μm)	Features
 	XCS2000	4	New coating combining wear and fracture resistance realises superb long tool life in medium to high speed machining of heat-resistant alloys and stainless steel
	ACS2500	3	Coating with excellent wear and adhesion resistance provides outstanding performance especially in machining titanium alloys
	ACS3000	3	High toughness carbide substrate and a coating with excellent chipping resistance provide outstanding stability in a wide range of work materials such as heat-resistant alloys, stainless steel, and titanium alloys

■ Grade Application Range


Newly developed **XCS2000/ACS2500/ACS3000** grades, ideal for machining titanium alloys, heat-resistant alloys and stainless steel, are now available!

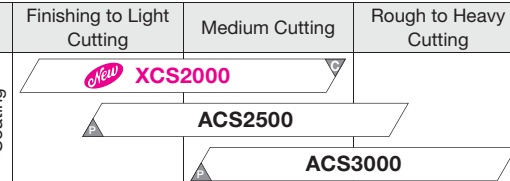Work Material	Finishing to Light Cutting	Medium Cutting	Rough to Heavy Cutting
 			


The letters "C" and "P" at the end of each grade indicate the coating type.

▽: CVD ▲: PVD

■ Cutting Performance

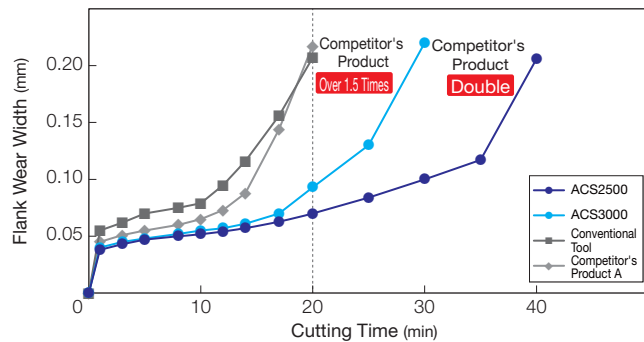

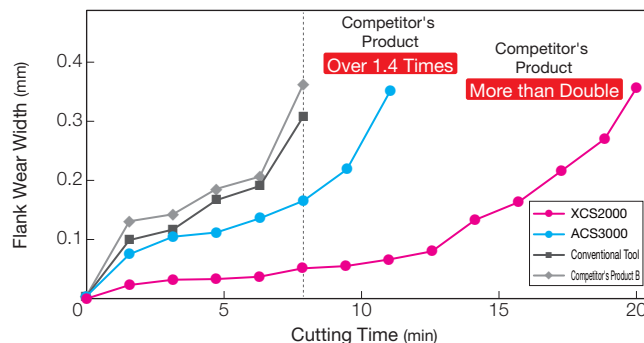


Machine : Vertical Machining Centre BT40, Work Material: Ti-6Al-4V
 Tool : RSE 12050RS05, Insert: RPHT1204M0EN-G
 Cutting conditions : vc = 70m/min fz = 0.25mm/t ap = 2mm ae = 30mm Wet



Machine : Vertical Machining Centre BT40, Work Material: Inconel 718 (44HRC)
 Tool : RSE 12050RS05, Insert: RPHT1204M0EN-G
 Cutting conditions : vc = 40m/min fz = 0.3mm/t ap = 2mm ae = 30mm Wet

New CVD Coating Layer Features



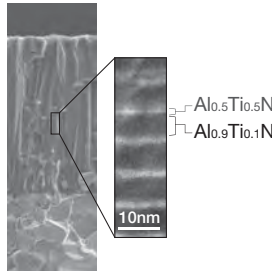


Pure Cubic Crystal AlTiN with High Al Content
 With proprietary structural control technology, differently composed layers of AlTiN are stacked at the nanometre level. With a high-Al composition containing over 80% Al on average, it also maintains a cubic crystalline structure to achieve excellent thermal resistance and high hardness. Vastly improved wear resistance.

Special Surface Treatment
 Proprietary surface treatment introduces high compression stress to the coating, suppressing the development of cracks. Greatly improved fracture and thermal crack resistance.

Applicable Grade: XCS2000

New PVD Coating Layer Features




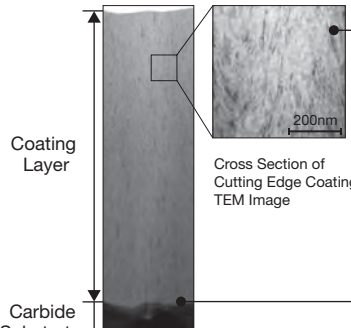


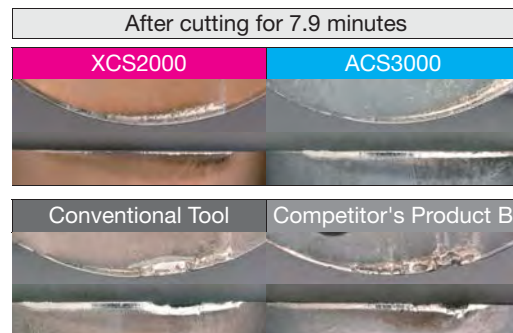
Ultra-fine Grained B Additive
 · New AlTiBN coating, with an ultra-fine coating structure, achieves high strength and toughness
 · Outstanding chipping resistance and wear resistance

High Adhesion Strength
 Significantly improved coating adhesion and more than 2x conventional chipping resistance

Applicable Grades: ACS2500, ACS3000

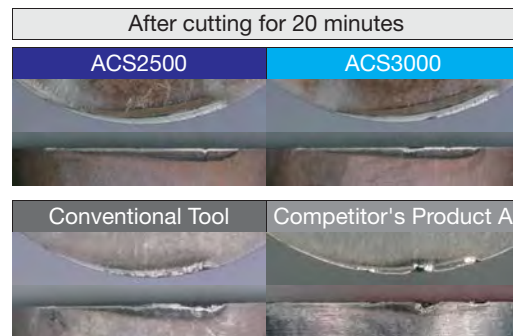

Superb wear resistance for a tool life 1.5 times greater than that of conventional tools and competitor's products



Superb fracture resistance for a tool life 1.4 times greater than that of conventional tools and competitor's products

RSE 10000RS type



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

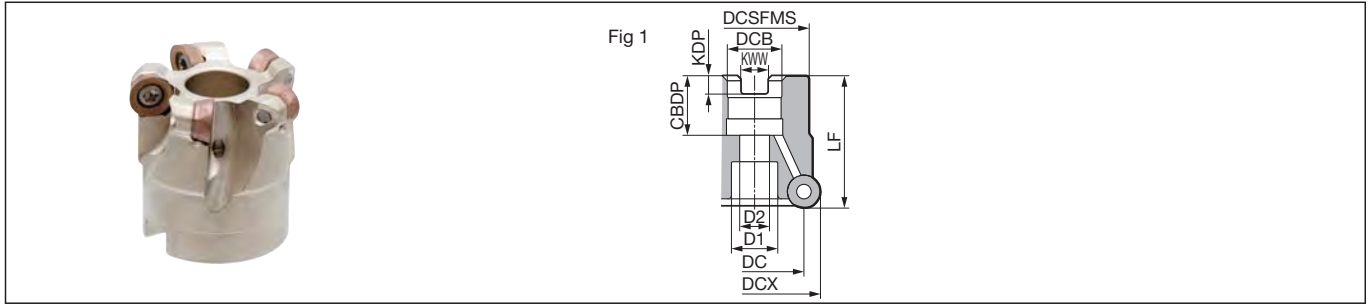

Body (Shell type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric RSE 10040RS05	●	40	30	33	40	16	8.4	5.6	18	14	9	5	0.16	1
10050RS06	●	50	40	40	40	22	10.4	6.3	20	18	11	6	0.27	1

Inserts are sold separately.

Parts

Flat Insert Screw	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit	
BFTX03584IP	HPS1015	TRB15IP	SUMI-P
3.0			

Identification Code

RSE 10 040 R S 05
 Series Code Insert Size Max. Dia. Feed Direction Metric Bore Number of Teeth

Insert

Dimensions (mm)

Grade Classification	Coated Carbide			Inscribed Circle IC	Thickness S	Fig
	High-speed/Light Cutting	Medium Cutting	Roughing			
Process	M S	M S	M S			
	M S	M S	M S			
	M S	M S	M S			
Cat. No.	XCS2000	ACS2500	ACS3000			
	●	●	●	10	3.97	1
RPHT10T3M0EN-G	●	●	●	10	3.97	2
RPMT10T3M0EN-G	●	●	●	10	3.97	3
RDMT10T3M0EN-G	●	●	●	10	3.97	3

Fig 1 4-cornered

Fig 2 8-cornered

Fig 3 8-cornered

Recommended Cutting Conditions

ISO	Work Material		Hardness	Chipbreaker	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Grade
S	Exotic Alloy	Heat-Resistant Alloy	—	G	25 - 35 - 50	0.15 - 0.25 - 0.35	XCS2000/ACS2500/ACS3000
		Ti Alloy	—	G	30 - 60 - 90	0.15 - 0.25 - 0.35	ACS2500/ACS3000
M	Stainless Steel	SUS430 and Others (Martensitic/Ferritic)	200HB	G	115 - 145 - 175	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000
		SUS403 and Others (Martensitic/Hardened)	240HB	G	105 - 130 - 155	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000
		SUS304, SUS316 (Austenitic)	180HB	G	125 - 155 - 190	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000


Note - The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, work material shape, clamping system).
 - For groove milling, calculate the feed rate at around 70% of the above values.
 - The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

RSE 12000R(S) type



New

Rake Angle	Radial	-5°
	Axial	4°

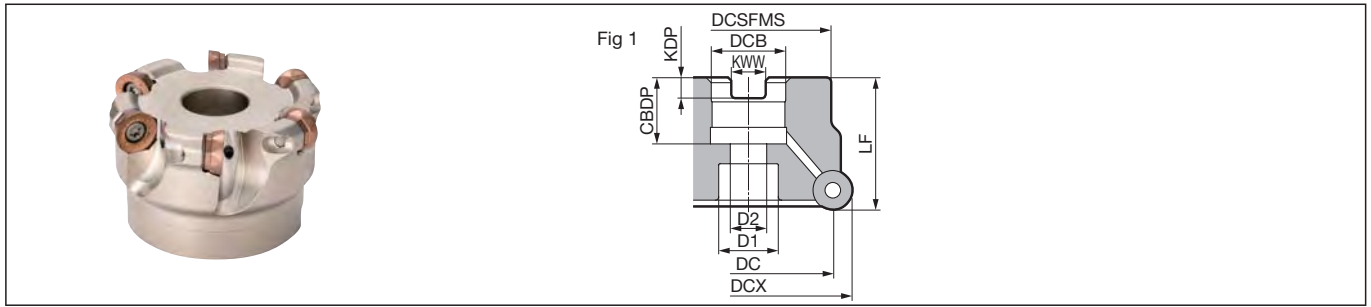

Body (Shell type)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig	
Metric	RSE 12040RS04	●	40	28	33	40	16	8.4	5.6	18	13.5	9	4	0.15	1
	12042RS04	●	42	30	33	40	16	8.4	5.6	18	14	9	4	0.17	1
	12050RS05	●	50	38	41	40	22	10.4	6.3	20	18	11	5	0.24	1
	12050RS06	●	50	38	41	40	22	10.4	6.3	20	18	11	6	0.23	1
	12052RS05	●	52	40	41	40	22	10.4	6.3	20	18	11	5	0.26	1
	12063RS06	●	63	51	50	40	22	10.4	6.3	20	18	11	6	0.47	1
	12080RS08	●	* 80	68	55	50	27	12.4	7	22	20	14	8	0.89	1
Inch	RSE 12080R08	●	* 80	68	55	50	25.4	12.4	7	22	20	14	8	0.9	1

Inserts are sold separately.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Parts

Flat Insert Screw	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit	
BFTX04095IP	3.0	HPS1015	TRB15IP

Identification Code

RSE 12 050 R S 05

Series Code Insert Size Max. Dia. Feed Direction Metric Bore Number of Teeth

Insert

Dimensions (mm)

Process	Grade Classification		Coated Carbide		Inscribed Circle IC	Thickness S	Fig	
	High-speed/Light Cutting	Medium Cutting	MS	MS				
		Roughing						
			New					
			XCS2000	ACS2500	ACS3000			
			●	●	●	12	4.76	1
			●	●	●	12	4.76	2
			●	●	●	12	4.76	3

Fig 1 4-cornered

Fig 2 8-cornered

Fig 3 8-cornered

Recommended Cutting Conditions

ISO	Work Material		Hardness	Chipbreaker	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Grade
S	Exotic Alloy	Heat-Resistant Alloy	—	G	25 - 35 - 50	0.15 - 0.25 - 0.35	XCS2000/ACS2500/ACS3000
		Ti Alloy	—	G	30 - 60 - 90	0.15 - 0.25 - 0.35	ACS2500/ACS3000
M	Stainless Steel	SUS430 and Others (Martensitic/Ferritic)	200HB	G	115 - 145 - 175	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000
		SUS403 and Others (Martensitic/Hardened)	240HB	G	105 - 130 - 155	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000
		SUS304, SUS316 (Austenitic)	180HB	G	125 - 155 - 190	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000

Note The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, work material shape, clamping system).

For groove milling, calculate the feed rate at around 70% of the above values.

The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

RSE 10000E type



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

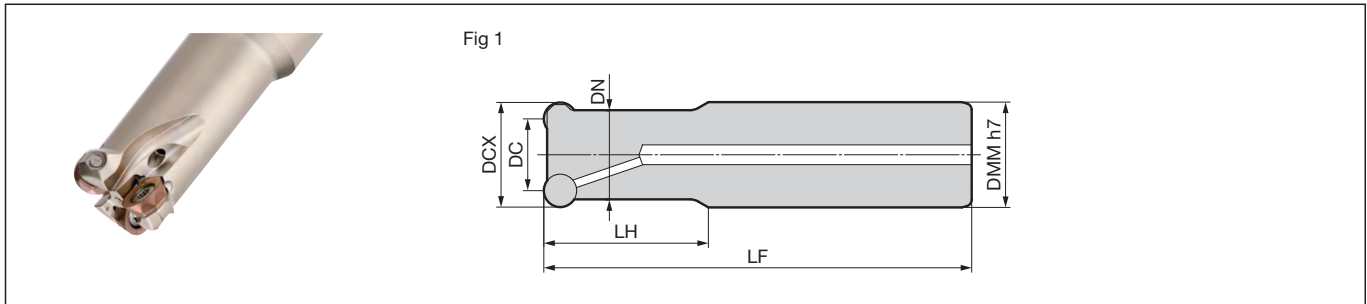

Body (Shank type)

Cat. No.	Stock	Dimensions (mm)								
		Max. Dia. DCX	Dia. DC	Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
RSE 10025E02	●	25	15	25	20.3	50	130	2	0.4	1
10025E03	●	25	15	25	20.3	50	130	3	0.39	1
10032E03	●	32	22	32	27.1	50	130	3	0.68	1
10032E04	●	32	22	32	27.1	50	130	4	0.67	1

Inserts are sold separately.

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX03584IP	3.0	TRDR15IP SUMI-P

Identification Code

RSE 10 032 E 03
 Series Code Insert Size Max. Dia. Shank type Number of Teeth

Insert

Grade Classification	Coated Carbide			Inscribed Circle IC	Thickness S	Fig
	High-speed/Light Cutting	Medium Cutting	Roughing			
Process	High-speed/Light Cutting	M S	M S	10	3.97	1
	Medium Cutting	M S	M S			
	Roughing	M S	M S			
Cat. No.	New			10	3.97	Fig
	XCS2000	ACS2500	ACS3000			
RPHT10T3M0EN-G	●	●	●			
RPMT10T3M0EN-G	●	●	●	2		
RDMT10T3M0EN-G	●	●	●	3		

Fig 1 4-cornered

Fig 2 8-cornered


Fig 3 8-cornered

Recommended Cutting Conditions

ISO	Work Material		Hardness	Chipbreaker	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Grade
S	Exotic Alloy	Heat-Resistant Alloy	—	G	25 - 35 - 50	0.15 - 0.25 - 0.35	XCS2000/ACS2500/ACS3000
		Ti Alloy	—	G	30 - 60 - 90	0.15 - 0.25 - 0.35	ACS2500/ACS3000
M	Stainless Steel	SUS430 and Others (Martensitic/Ferritic)	200HB	G	115 - 145 - 175	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000
		SUS403 and Others (Martensitic/Hardened)	240HB	G	105 - 130 - 155	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000
		SUS304, SUS316 (Austenitic)	180HB	G	125 - 155 - 190	0.15 - 0.30 - 0.45	XCS2000/ACS2500/ACS3000

Note - The recommended cutting conditions may not be practical depending on the operating conditions (e.g. machine, work material shape, clamping system).
 - For groove milling, calculate the feed rate at around 70% of the above values.
 - The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

MEMO

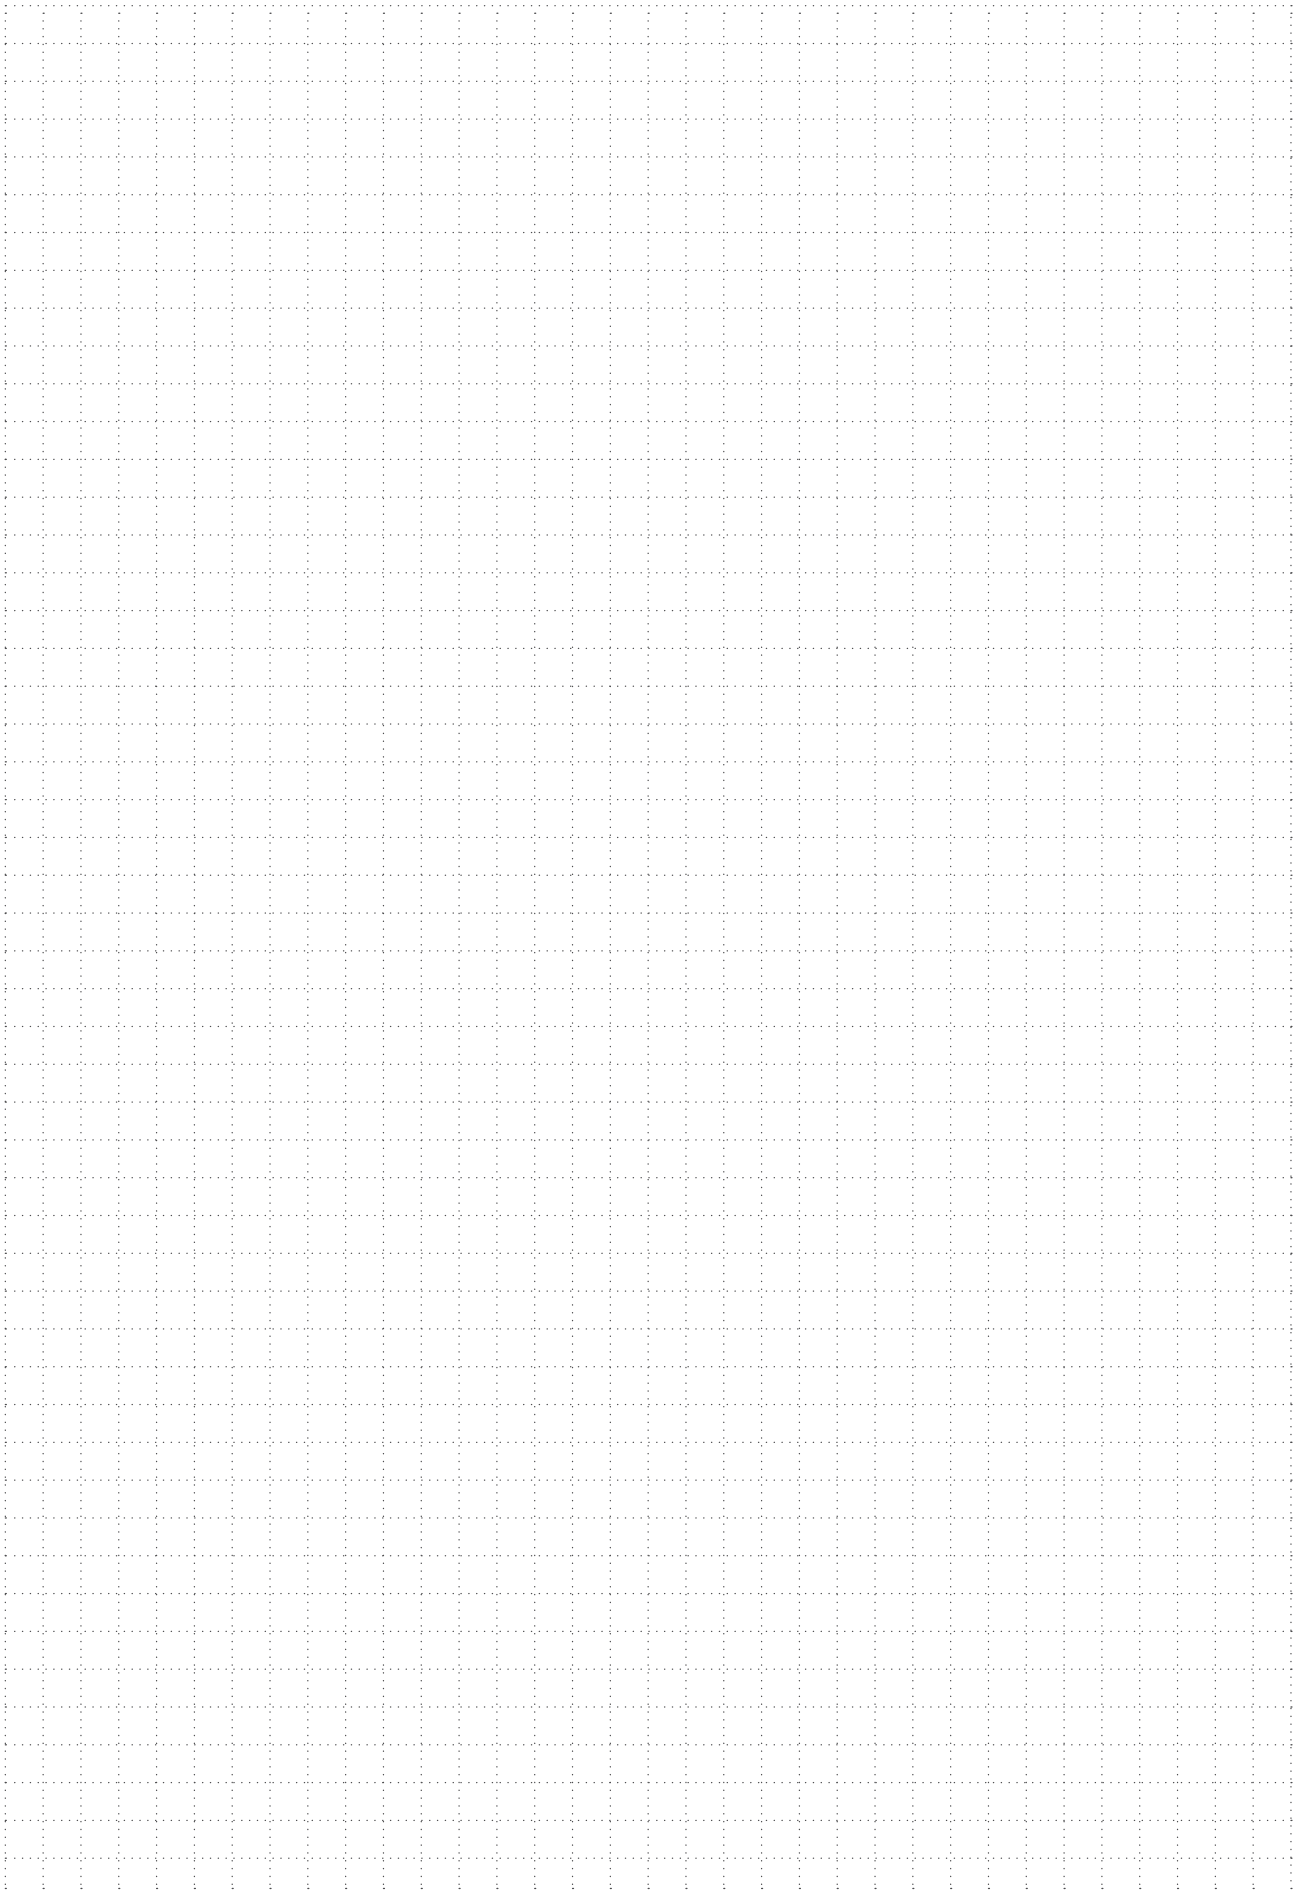



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



■ Features


SEC-Wave Radius Mill RSX type is a radius cutter that enables stable machining even when using machines with low clamp rigidity, thanks to a body design that achieves excellent sharpness and rigidity.

Lineup of ACM series grades for stainless steel/exotic alloy, ACP200 grade for steel and ACK300 grade for cast iron to suit a wide range of work materials.

RSX08000 and RSX20000 lineup extended to support a wide range of machining.


■ Low Cutting Force, Low-vibration Design

Achieves low cutting force, low-vibration machining thanks to ultra-high-rake design and high-rigidity body design.

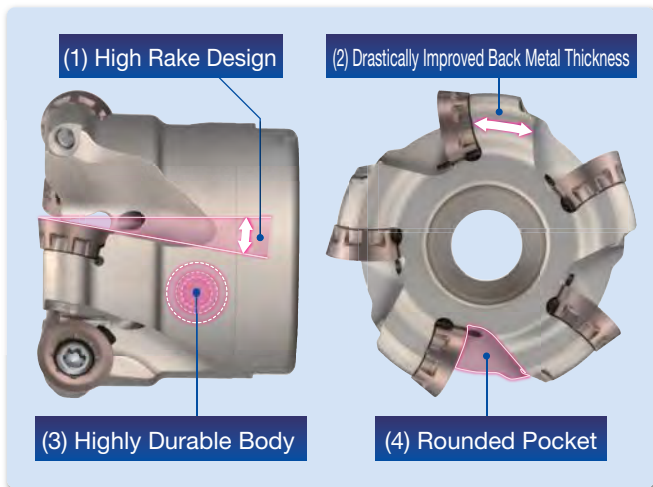

■ Excellent Operability

Enables easy corner control with high accuracy and operability by employing our proprietary positioning mechanism.

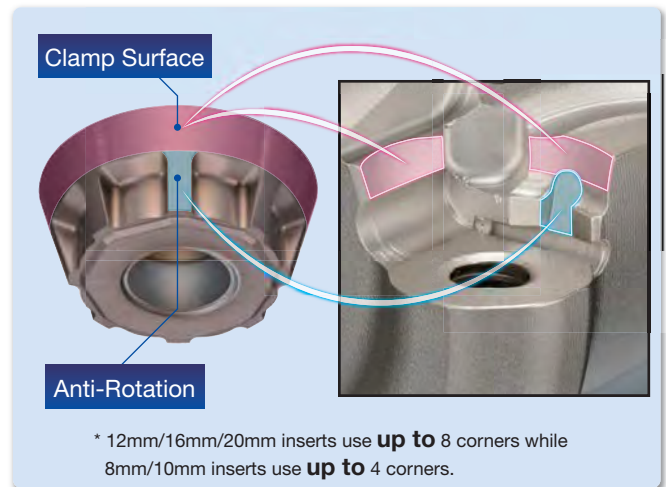

■ Product Range


Type	Cat. No.	Description	Max. Diameter (mm)												Shape	
			ø20	ø25	ø32	ø40	ø50	ø52	ø63	ø66	ø80	ø100	ø125	ø160		
Shell	RSX1000RS	Standard Pitch				4	5	5								
	RSXF1000RS	Extra Fine Pitch				5	6	6								
	RSX12000RS	Standard Pitch				3	4	4	5	6	6	6				
	RSX12000R <small>Inch Bore</small>	Standard Pitch									6	6				
	RSXF12000RS	Extra Fine Pitch				4	5	5	6	7	7	10				
	RSXF12000R <small>Inch Bore</small>	Extra Fine Pitch									7	10				
	RSX16000RS	Standard Pitch							4		5	6	6			
	RSX16000R <small>Inch Bore</small>	Standard Pitch									5	6	6			
	RSXF16000RS	Extra Fine Pitch								5	6	7	8	10		
	RSXF16000R <small>Inch Bore</small>	Extra Fine Pitch									6	7	8	10		
	RSX20000RS	Standard Pitch									4	5	6	7		
	RSX20000R <small>Inch Bore</small>	Standard Pitch									4	5	6	7		
Shank	RSX08000ES	Standard Pitch	2	3												
	RSXF08000ES	Extra Fine Pitch	3	4												
	RSX10000ES	Standard Pitch		2	3											
	RSXF10000ES	Extra Fine Pitch		3	4											
	RSX12000ES	Standard Pitch			2											
	RSXF12000ES	Extra Fine Pitch			3											
Modular	RSX08000M	Standard Pitch	2	3	4											
	RSXF08000M	Extra Fine Pitch	3	4	5											
	RSX10000M	Standard Pitch		2	3											
	RSXF10000M	Extra Fine Pitch		3	4											
	RSX12000M	Standard Pitch			2	3										
RSXF12000M	Extra Fine Pitch			3	4											

Number in ●●● shows the number of teeth Inch Bore

Modular type H271


■ Cutting Performance

Tool Life Comparison (Fracture Resistance)

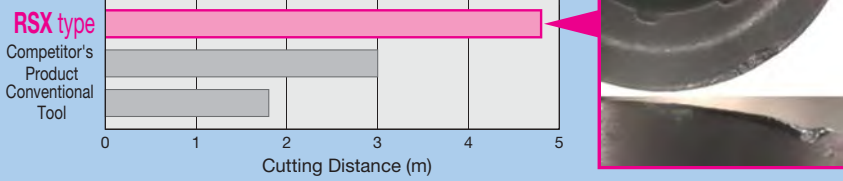


Achieves a tool life approximately 1.6 times longer than that of our competitors' products.

Cutting Vibration Comparison

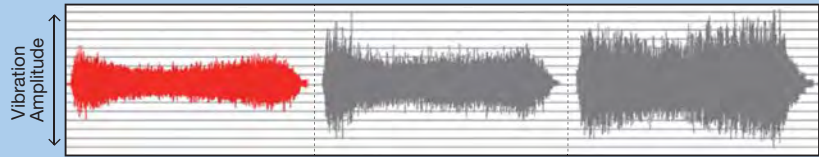

Reduced by approximately 15% compared to competitors' products.


Comparison of Cutting Force

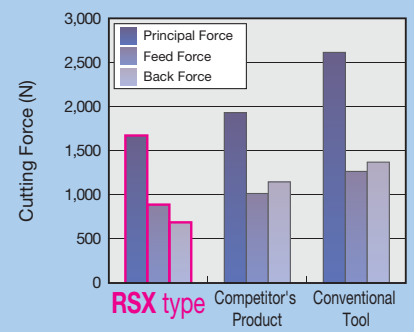

Work material: SUS304 Tool: ø50
 Cutting Conditions: VC = 200m/min, fz = 0.5mm/t
 ap = 2.0mm, ae = 10.0mm Wet


■ Long, Stable Tool Life

Tool Life (SUS304 Machining)

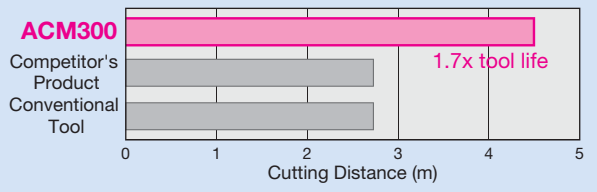


Cutter: RSXF12050RS
 Insert: RDET1204M0EN-G
 Cutting Conditions: vc = 200m/min, fz = 0.5mm/t,
 ap = 2mm, ae = 10mm Wet

(Cutting Distance: 2.7m)




Tool Life (SUS630-H900 Machining)

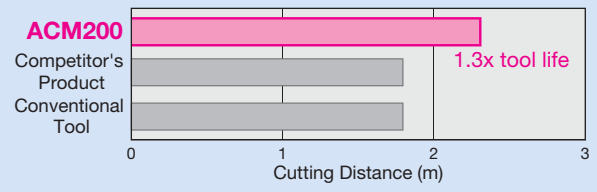

Cutter: RSXF12050RS
 Insert: RDET1204M0EN-G
 Cutting Conditions: vc = 150m/min, fz = 0.3mm/t,
 ap = 2mm, ae = 10mm Wet

(Cutting Distance: 1.8m)




RSX series

Machining Applications


Can be used for various types of high-efficiency machining such as deep shoulder milling of molds, ramping, and helical milling.

Precautions for Helical Milling

Standard Diameter




Standard Diameter or Below



Centre uncut portion cannot be removed by traverse cutting with the same cutter.


Standard Diameter or Above



Centre uncut portion can be removed by traverse cutting with the same cutter.

Precautions for Ramping


Use at the RMPX below or lower.



Recommended Values for Helical Milling and Ramping

Insert Cat. No.	Helical Milling (mm)				Ramping
	Max. Dia. DCX	Machining Dia. ϕD			Maximum Ramp Angle RMPX
		Min. Dia.	Standard Diameter	Max. Dia.	
RDET08...	20	27.6	32	39	12°00'
	25	37.0	42	49	7°15'
	32	50.8	56	63	4°45'
RDET10...	25	33.0	40	49	10°30'
	32	46.0	54	63	6°45'
	40	62.0	70	79	4°30'
	50	82.0	90	99	3°15'
	52	86.0	94	103	3°10'
RDET12...	32	41.5	52	63	12°30'
	40	57.5	68	79	8°00'
	50	77.5	88	99	5°30'
	52	81.5	92	103	5°15'
	63	103.5	114	125	4°00'
	66	109.5	120	131	3°45'
	80	137.5	148	159	2°50'
RDET16...	100	177.5	188	199	2°10'
	63	96.0	110	125	6°00'
	80	130.0	144	159	4°10'
	100	170.0	184	199	3°00'
RDET20...	125	220.0	234	249	2°20'
	80	122.0	140	159	4°15'
	100	162.0	180	199	3°00'
	125	212.0	230	249	2°00'
	160	282.0	300	319	1°15'

Precautions for Mounting Inserts



Hold down the insert from the **A** and **B** directions and fasten the screw.

Precautions for RSX08000 type



Align either insert rake face marking position **C** with the marking position **D** on the body.

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling


Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

RSX(F) 10000RS type

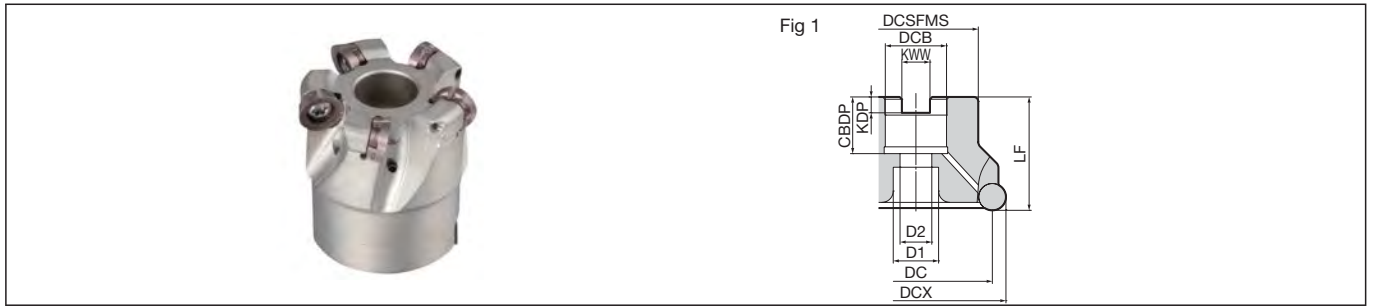

Body (Standard Pitch)

													Dimensions (mm)		
	Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDFP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	RSX 10040RS	●	40	30	34	40	16	8.4	5.6	18	14	9	4	0.2	1
	10050RS	●	50	40	40	40	22	10.4	6.3	20	18	11	5	0.3	1
	10052RS	●	52	42	40	40	22	10.4	6.3	20	18	11	5	0.4	1

Body (Extra Fine Pitch)

													Dimensions (mm)		
	Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDFP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	RSXF 10040RS	●	40	30	34	40	16	8.4	5.6	18	14	9	5	0.2	1
	10050RS	●	50	40	40	40	22	10.4	6.3	20	18	11	6	0.3	1
	10052RS	●	52	42	40	40	22	10.4	6.3	20	18	11	6	0.3	1

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Insert

Grade Classification		Coated Carbide									Dimensions (mm)		
Process	High-speed/Light Cutting						Inscribed Circle IC	Corner Radius RE	Thickness S	Fig			
	General-purpose												
	Roughing												
Cat. No.		ACP200	ACK300	ACM100	ACM200	ACM300							
RDET 10T3M0EN-G		●	●	●	●	●	10	5.0	3.97	1			
10T3M0EN-H		●	●	●	●	●	10	5.0	3.97	1			

Precautions for Mounting Inserts H196

Identification Code

RSX F 10 040 R S

Series Code Extra Fine Pitch Insert Size Max. Dia. Feed Direction Metric Bore

Parts


Flat Insert Screw	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit	
BFTX03584IP	3.0	HPS1015	TRB15IP SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade	
P	Carbon Steel	180 to 280 HB	100-160-200	0.20-0.40-0.60	ACP200	
	Alloy Steel	180 to 280 HB	100-140-180	0.20-0.30-0.40	ACP200	
M	Stainless Steel Cr-Ni-based	Ferritic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Martensitic	200 to 330HB	80-120-180	0.15-0.25-0.35	ACM300
		Austenitic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Duplex (Austenitic/Ferritic)	230 to 270HB	80-120-180	0.15-0.25-0.35	ACM200
		Deposition Hardened Structures	330HB	60-100-160	0.15-0.25-0.35	ACM200
K	Cast Iron	250HB	80-120-160	0.10-0.30-0.40	ACK300	
	Heat-Resistant Alloy	Ni-based Material	250 to 350HB	20-30-40	0.10-0.20-0.30	ACM100
S	Titanium	Pure Titanium (99.5%)	(Rm400)	60-80-100	0.10-0.20-0.30	ACM200
		a + β Alloy	(Rm1050)	40-50-60	0.10-0.20-0.30	ACM200

Note The cutting conditions are guidelines. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

RSX(F) 12000R(S) type

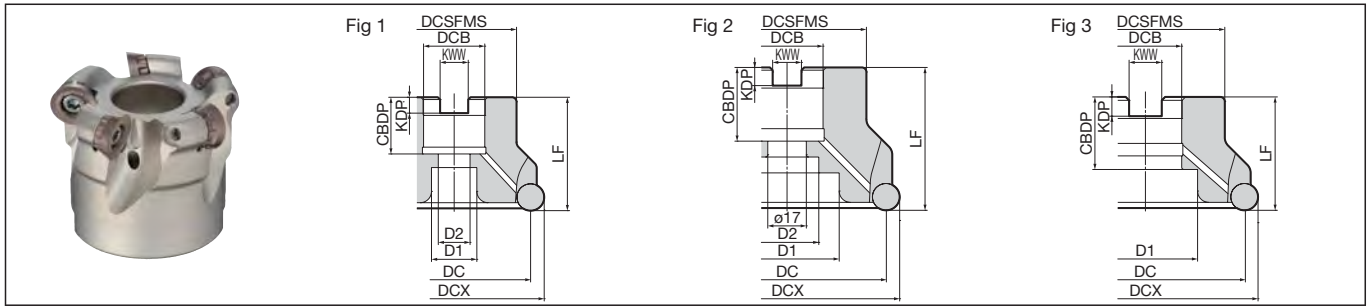

Body (Standard Pitch)

Cat. No.		Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	RSX 12040RS	●	40	28	32	40	16	8.4	5.6	18	13.5	9	3	0.2	1
	12050RS	●	50	38	40	40	22	10.4	6.3	20	18	11	4	0.3	1
	12052RS	●	52	40	40	40	22	10.4	6.3	20	18	11	4	0.3	1
	12063RS	●	63	51	40	40	22	10.4	6.3	20	18	11	5	0.4	1
	12066RS	●	66	54	55	50	27	12.4	7.0	25	20	14	6	0.7	1
	12080RS	●	80	68	55	50	27	12.4	7.0	25	20	14	6	1.0	1
	12100RS	●	100	88	70	50	32	14.4	8.5	32	46	—	6	1.4	3
Inch	RSX 12080R	●	80	68	55	50	25.4	9.5	6.0	25	20	13	6	1.0	1
	12100R	●	100	88	70	63	31.75	12.7	8.0	32.5	46	28	6	1.9	2

Body (Extra Fine Pitch)

Cat. No.		Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	RSXF 12040RS	●	40	28	32	40	16	8.4	5.6	18	13.5	9	4	0.2	1
	12050RS	●	50	38	40	40	22	10.4	6.3	20	18	11	5	0.3	1
	12052RS	●	52	40	40	40	22	10.4	6.3	20	18	11	5	0.3	1
	12063RS	●	63	51	40	40	22	10.4	6.3	20	18	11	6	0.4	1
	12066RS	●	66	54	55	50	27	12.4	7.0	25	20	14	7	0.7	1
	12080RS	●	80	68	55	50	27	12.4	7.0	25	20	14	7	0.9	1
	12100RS	●	100	88	70	50	32	14.4	8.5	32	46	—	10	1.3	3
Inch	RSXF 12080R	●	80	68	55	50	25.4	9.5	6.0	25	20	13	7	1.0	1
	12100R	●	100	88	70	63	31.75	12.7	8.0	32.5	46	28	10	1.8	2



Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.

Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Insert

Grade Classification		Coated Carbide					Dimensions (mm)			
Process	High-speed/Light Cutting			M	S		Inscribed Circle IC	Corner Radius RE	Thickness S	Fig
	General-purpose	M	S	M	S					
	Roughing	M	K		S					
Cat. No.		ACP200	ACK300	ACM100	ACM200	ACM300				
RDET 1204M0EN-G		●	●	●	●	●	12	6.0	4.76	1
1204M0EN-H		●	●	●	●	●	12	6.0	4.76	1

Fig 1 8-cornered



Precautions for Mounting Inserts H198

Identification Code

RSX F 12 040 R S
 Series Code Extra Insert Max. Dia. Feed Metric
 Fine Pitch Size Direction Bore

Parts


Flat Insert Screw		Detachable Wrench		Anti-seizure Cream
		Handle Grip	Bit	
BFTX0409IP	3.0	HPS1015	TRB15IP	SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade	
P	Carbon Steel	180 to 280 HB	100-160-200	0.20-0.40-0.60	ACP200	
	Alloy Steel	180 to 280 HB	100-140-180	0.20-0.30-0.40	ACP200	
M	Stainless Steel	Cr-based Ferritic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Martensitic	200 to 330HB	80-120-180	0.15-0.25-0.35	ACM300
		Austenitic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Duplex (Austenitic/Ferritic)	230 to 270HB	80-120-180	0.15-0.25-0.35	ACM200
		Deposition Hardened Structures	330HB	60-100-160	0.15-0.25-0.35	ACM200
K	Cast Iron	250HB	80-120-160	0.10-0.30-0.40	ACK300	
S	Heat-Resistant Alloy	Ni-based Material	250 to 350HB	20-30-40	0.10-0.20-0.30	ACM100
		Pure Titanium (99.5%) a + β Alloy	(Rm400) (Rm1050)	60-80-100 40-50-60	0.10-0.20-0.30	ACM200

Note The cutting conditions are guidelines. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

RSX(F) 16000R(S) type

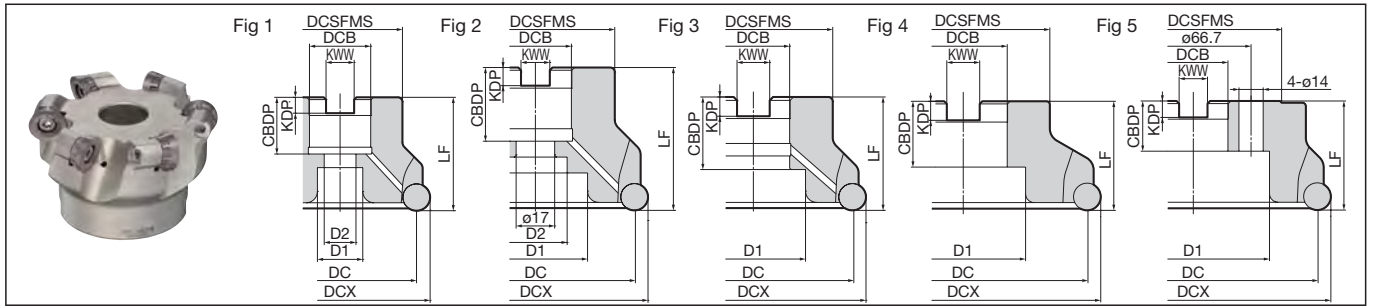

Body (Standard Pitch)

Cat. No.		Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	RSX 16063RS	●	63	47	50	40	22	10.4	6.3	20	18	11	4	0.5	1
	16080RS	●	80	64	55	50	27	12.4	7.0	25	20	14	5	0.9	1
	16100RS	●	100	84	70	50	32	14.4	8.5	32	46	—	6	1.3	3
	16125RS	●	125	109	80	63	40	16.4	9.5	29	52	29	6	2.6	1
Inch	RSX 16080R	●	80	64	55	50	25.4	9.5	6.0	25	20	13	5	0.9	1
	16100R	●	100	84	70	63	31.75	12.7	8.0	32.5	46	28	6	1.8	2
	16125R	●	125	109	80	63	38.1	15.9	10.0	35.5	55	30	6	2.7	1

Body (Extra Fine Pitch)

Cat. No.		Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	RSXF 16063RS	●	63	47	50	40	22	10.4	6.3	20	18	11	5	0.4	1
	16080RS	●	80	64	55	50	27	12.4	7.0	25	20	14	6	0.8	1
	16100RS	●	100	84	70	50	32	14.4	8.5	32	46	—	7	1.3	3
	16125RS	●	125	109	80	63	40	16.4	9.5	29	52	29	8	2.5	1
	16160RS	●	160	144	130	63	40	16.4	9.5	29	88	—	10	4.8	5
Inch	RSXF 16080R	●	80	64	55	50	25.4	9.5	6.0	25	20	13	6	0.8	1
	16100R	●	100	84	70	63	31.75	12.7	8.0	32.5	46	28	7	1.7	2
	16125R	●	125	109	80	63	38.1	15.9	10.0	35.5	55	30	8	2.6	1
	16160R	●	160	144	100	63	50.8	19.1	11.0	38	72	—	10	4.3	4

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.


Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide					Inscribed Circle IC				Corner Radius RE		Thickness S	Fig
Process	High-speed/Light Cutting			M6	M6		16	8.0	6.5	1	16	8.0	6.5	1
	General-purpose	M6		M6	M6									
	Roughing	M6	K	M6	M6									
Cat. No.		ACP200	ACK300	ACM100	ACM200	ACM300								
RDET 1606M0EN-G		●	●	●	●	●								
1606M0EN-H		●	●	●	●	●								

Fig 1 8-cornered

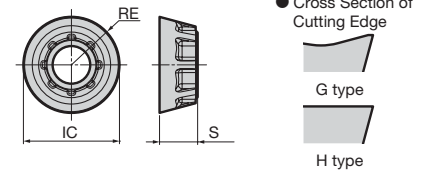

Identification Code

RSX F 16 063 R S
 Series Code Extra Insert Max. Dia. Feed Metric Direction Bore
 Fine Pitch Size

Parts


Applicable Cutter	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit				
RSX(F) 16063RS	BFTX0511IP	5.0	—	HPL2025	TRB20IP	SUMI-P
RSX(F) 16080R(S)						
Up to RSX(F) 16125R(S)						
RSXF 16160R(S)						
		5.0	TRDR20IP	—	—	SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade	
P	Carbon Steel	180 to 280 HB	100-160-200	0.20-0.40-0.60	ACP200	
	Alloy Steel	180 to 280 HB	100-140-180	0.20-0.30-0.40	ACP200	
M	Stainless Steel	Ferritic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Martensitic	200 to 330HB	80-120-180	0.15-0.25-0.35	ACM300
	Austenitic	200HB	150-180-200	0.15-0.25-0.35	ACM300	
	Duplex (Austenitic/Ferritic)	230 to 270HB	80-120-180	0.15-0.25-0.35	ACM200	
	Deposition Hardened Structures	330HB	60-100-160	0.15-0.25-0.35	ACM200	
S	Cast Iron	250HB	80-120-160	0.10-0.30-0.40	ACK300	
	Heat-Resistant Alloy	Ni-based Material	250 to 350HB	20-30-40	0.10-0.20-0.30	ACM100
	Titanium	Pure Titanium (99.5%) a + β Alloy	(Rm400) (Rm1050)	60-80-100 40-50-60	0.10-0.20-0.30	ACM200

Note The cutting conditions are guidelines. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

RSX(F) 20000R(S) type

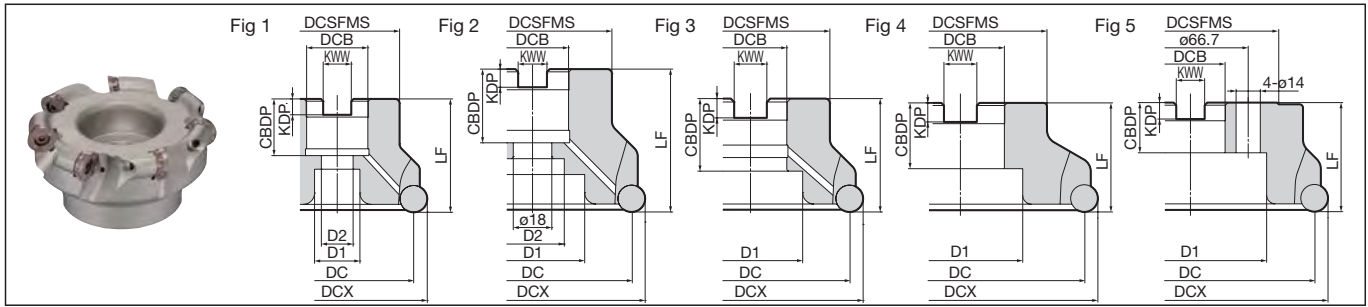

Body (Standard Pitch)

Cat. No.		Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	RSX 20080RS	●	80	60	55	50	27	12.4	7	22	20	14	4	0.9	1
	20100RS	●	100	80	70	50	32	14.4	8	32	46	—	5	1.8	3
	20125RS	●	125	105	80	63	40	16.4	9	29	52	29	6	2.6	1
	20160RS	●	160	140	130	63	40	16.4	9	29	90	—	7	4.7	5
Inch	RSX 20080R	●	80	60	55	50	25.4	9.5	6	25	20	14	4	0.9	1
	20100R	●	100	80	70	63	31.75	12.7	8	32	46	27	5	1.8	2
	20125R	●	125	105	80	63	38.1	15.9	10	35.5	55	30	6	2.6	1
	20160R	●	160	140	130	63	50.8	19.1	11	38	72	—	7	4.2	4

Body (Extra Fine Pitch)

Cat. No.		Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	RSXF 20080RS	●	80	60	55	50	27	12.4	7	22	20	14	5	0.9	1
	20100RS	●	100	80	70	50	32	14.4	8	32	46	—	6	1.8	3
	20125RS	●	125	105	80	63	40	16.4	9	29	52	29	7	2.6	1
	20160RS	●	160	140	130	63	40	16.4	9	29	90	—	9	4.6	5
Inch	RSXF 20080R	●	80	60	55	50	25.4	9.5	6	25	20	14	5	0.9	1
	20100R	●	100	80	70	63	31.75	12.7	8	32	46	27	6	1.8	2
	20125R	●	125	105	80	63	38.1	15.9	10	35.5	55	30	7	2.6	1
	20160R	●	160	140	130	63	50.8	19.1	11	38	72	—	9	4.1	4

Inserts are sold separately. Take note of the cutter mounting size (DCB) when selecting a cutter.


Note: For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide					Dimensions (mm)			
Process	High-speed/Light Cutting			M	M		Inscribed Circle IC	Corner Radius RE	Thickness S	Fig
	General-purpose			M	M					
	Roughing		K							
Cat. No.		ACP200	ACK300	ACM100	ACM200	ACM300				
RDET 2006M0EN-G		●	●	●	●	●	20	10.0	6.5	1
2006M0EN-H		●	●	●	●	●	20	10.0	6.5	1

Fig 1 8-cornered



● Cross Section of Cutting Edge

G type

H type

Precautions for Mounting Inserts H196

Identification Code

RSX **F** **20** **080** **R** **S**

Series Code Extra Fine Pitch Insert Size Max. Dia. Feed Direction Metric Bore

Parts



Cat. No.	Flat Insert Screw	Integrated Wrench	Detachable Wrench Handle Grip	Bit	Anti-seizure Cream	
RSX(F) 20080R(S) Up to RSX(F) 20125R(S)	BFTX0615IP	5.0	—	HPL2025	TRB25IP	SUMI-P
RSX(F) 20160R(S)	BFTX0615IP	5.0	TRDR25IP	—	—	SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade	
P	Carbon Steel	180 to 280 HB	100-160-200	0.20-0.40-0.60	ACP200	
	Alloy Steel	180 to 280 HB	100-140-180	0.20-0.30-0.40	ACP200	
M	Stainless Steel	Ferritic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Martensitic	200 to 330HB	80-120-180	0.15-0.25-0.35	ACM300
		Austenitic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Duplex (Austenitic/Ferritic)	230 to 270HB	80-120-180	0.15-0.25-0.35	ACM200
		Deposition Hardened Structures	330HB	60-100-160	0.15-0.25-0.35	ACM200
K	Cast Iron	250HB	80-120-160	0.10-0.30-0.40	ACK300	
S	Heat-Resistant Alloy	Ni-based Material	250 to 350HB	20-30-40	0.10-0.20-0.30	ACM100
		Pure Titanium (99.5%) a + β Alloy	(Rm400) (Rm1050)	60-80-100 40-50-60	0.10-0.20-0.30 0.10-0.20-0.30	ACM200

Note: The cutting conditions are guidelines. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

RSX(F) 08000ES/10000ES/12000ES type

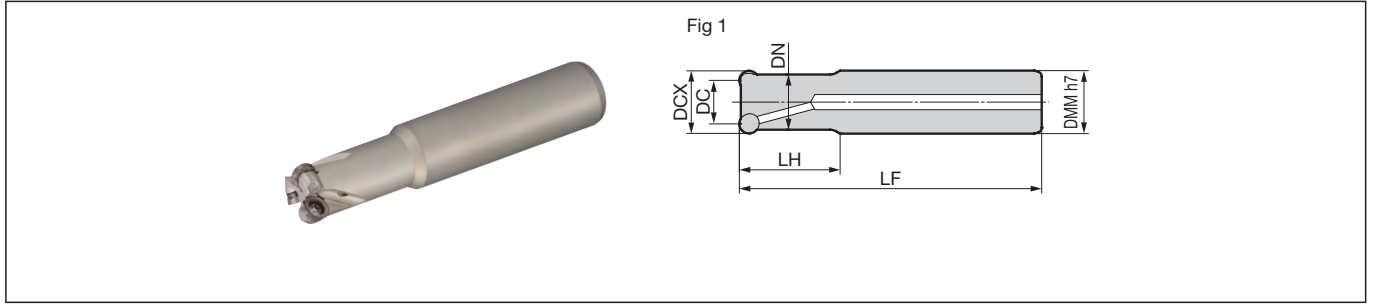

Body (Standard Pitch) Applicable Insert IC = 8mm type Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
RSX 08020ES	●	20	12	20	16.9	30	100	2	0.3	1
08025ES	●	25	17	25	21.9	40	120	3	0.4	1

Body (Extra Fine Pitch) Applicable Insert IC = 8mm type Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
RSXF 08020ES	●	20	12	20	16.9	30	100	3	0.3	1
08025ES	●	25	12	25	21.9	40	120	4	0.4	1

Body (Standard Pitch) Applicable Insert IC = 10mm type Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
RSX 10025ES	●	25	15	25	20.3	50	130	2	0.4	1
10032ES	●	32	22	32	27.1	50	130	3	0.7	1

Body (Extra Fine Pitch) Applicable Insert IC = 10mm type Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
RSXF 10025ES	●	25	15	25	20.3	50	130	3	0.4	1
10032ES	●	32	22	32	27.1	50	130	4	0.7	1

Body (Standard Pitch) Applicable Insert IC = 12mm type Dimensions (mm)


Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
RSX 12032ES	●	32	20	32	25.6	50	130	2	0.7	1

Body (Extra Fine Pitch) Applicable Insert IC = 12mm type Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
RSXF 12032ES	●	32	20	32	25.6	50	130	3	0.7	1

Insert

Grade Classification	Coated Carbide					Inscribed Circle IC	Corner Radius RE	Thickness S	Applicable Cutter	Fig
	High-speed/Light Cutting	General-purpose	Roughing	ACP200	ACK300					
Process	●	●	●	●	●	8	4.0	3.18	RSX(F)08000ES	1
	●	●	●	●	●	10	5.0	3.97	RSX(F)10000RS/ES	1
	●	●	●	●	●	12	6.0	4.76	RSX(F)12000RS/ES	2

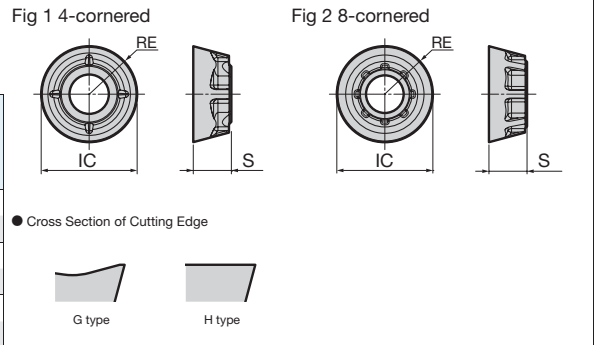

Precautions for Mounting Inserts H196

Identification Code

RSX F 10 025 ES

Series Code Extra Insert Max. Dia. Shank
Fine Pitch Size type

Parts

Applicable Cutter	Flat Insert Screw		Wrench	Anti-seizure Cream
	Image	Torque (N·m)		
RSX(F)08000ES	BFTX02506IP	1.5	TRDR08IP	SUMI-P
RSX(F)10000ES	BFTX03584IP	3.0	TRDR15IP	SUMI-P
RSX(F)12000ES	BFTX04091P	3.0	TRDR15IP	SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade	
P	Carbon Steel	180 to 280 HB	100-160-200	0.20-0.40-0.60	ACP200	
	Alloy Steel	180 to 280 HB	100-140-180	0.20-0.30-0.40	ACP200	
M	Stainless Steel	Ferritic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Martensitic	200 to 330HB	80-120-180	0.15-0.25-0.35	ACM300
	Cr-Ni-based	Austenitic	200HB	150-180-200	0.15-0.25-0.35	ACM300
		Duplex (Austenitic/Ferritic)	230 to 270HB	80-120-180	0.15-0.25-0.35	ACM200
		Deposition Hardened Structures	330HB	60-100-160	0.15-0.25-0.35	ACM200
K	Cast Iron	250HB	80-120-160	0.10-0.30-0.40	ACK300	
	Heat-Resistant Alloy	Ni-based Material	250 to 350HB	20-30-40	0.10-0.20-0.30	ACM100
S	Titanium	Pure Titanium (99.5%)	(Rm400)	60-80-100	0.10-0.20-0.30	ACM200
		a + β Alloy	(Rm1050)	40-50-60	0.10-0.20-0.30	ACM200

Note The cutting conditions are guidelines. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WRCX series

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



■ Features

The SEC-Wave Radius Mill WRCX type is a versatile, high-efficiency cutter that is suited to various types of machining such as deep shoulder milling of molds, ramping, and helical milling.

Furthermore, a wide selection of chipbreakers and grades covers a wide range of work materials, from steel to non-ferrous metals.

■ Product Range

	Cat. No.	Max. Dia. (mm)	Number of Teeth
Shell type	WRCX(F) 12000R(S)	ø40 to ø80	4-6
	WRCX(F) 16000R(S)	ø63 to ø100	3-6
	WRCX 20000R(S)	ø125 to ø160	5-6
Shank type	WRCX 08000E	ø20 to ø25	2-3
	WRCX 10000E	ø25 to ø32	2-3
	WRCX 16000E	ø40 to ø50	2-3
Modular type	WRCX 08000M	ø20 to ø25	2-3
	WRCX 10000M	ø25 to ø32	2-3
	WRCX 12000M	ø40	4

Modular type **H272**

● Maximum Allowable Spindle Speed when Milling Non-Ferrous Metal (Unit: min⁻¹)

Max. Dia. DCX(mm)	Insert Cat. No.		
	QPET10.....S	QPET12.....S	QPET16.....S
25	28,000		
32	25,000		
40		22,000	15,000
50		20,000	14,000
63		18,000	13,000
80		16,000	12,000
100			10,000

* The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force. Even if the speed used is within the maximum allowable spindle speeds, abnormal vibrations may occur due to machine rigidity or other factors. Therefore, it is advisable to start operation at half the maximum allowable spindle speed and increase the speed gradually while checking for abnormalities.


- Durable body with special surface treatment offers significantly improved tool life and reliability.
- Superb chatter resistance with anti-vibration edge design.
- All sizes come with coolant holes preventing chip build-up and jamming.
- Sturdy screw clamp with Torx Plus screw insert mounting ensures stable machining.

■ Abundant Insert Series

- In addition to conventional WRC type inserts, the new lineup includes non-ferrous metal inserts and surfing inserts



Non-Ferrous Metal Inserts QPET ○○○○○○ PPF-R-S

- Good surface roughness with arc-shaped wiper edge
- Sharp corners
- Four-cornered insert




Surfing Insert QPMT ○○○○○○ PPER-R

- Cutting edges feature unique rippled design
- Four-cornered insert
- Low cutting force, enabling use on low-rigidity machines as well
- * Use in combinations that alternate cutting edge A and cutting edge B.
(Only usable on cutters with an even number of cutting edges)

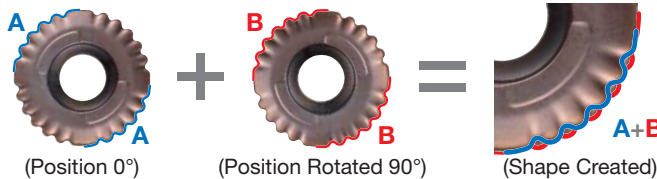


■ Usage Precautions

● Precautions for Helical Milling

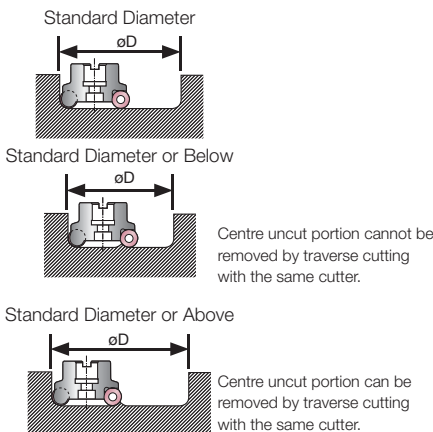

● Precautions for Ramping


- Use at the RMPX below or lower.



● Recommended Values for Helical Milling and Ramping

Insert Cat. No.	Helical Milling (Dimensions in mm)				Ramping
	Max. Dia. DCX	Machining Dia. øD		Maximum Ramp Angle RMPX(max)	
		Min. Dia.	Standard Diameter		
QP□□08○○○○	20	25	32	39	13°
	25	35	42	49	8°20'
QP□□10○○○○	25	32	40	48	13°10'
	32	46	54	62	8°
QP□□12○○○○	40	57	68	79	10°
	50	77	88	99	7°30'
	63	103	114	125	5°10'
	80	137	148	159	3°50'
QP□□16○○○○	40	49	64	79	19°30'
	50	69	84	99	12°
	63	95	110	125	8°
	80	129	144	159	5°30'
QP□□20○○○○	100	169	184	199	4°
	125	212	230	248	3°30'
	160	282	300	318	2°30'

WRCX(F)12000 type

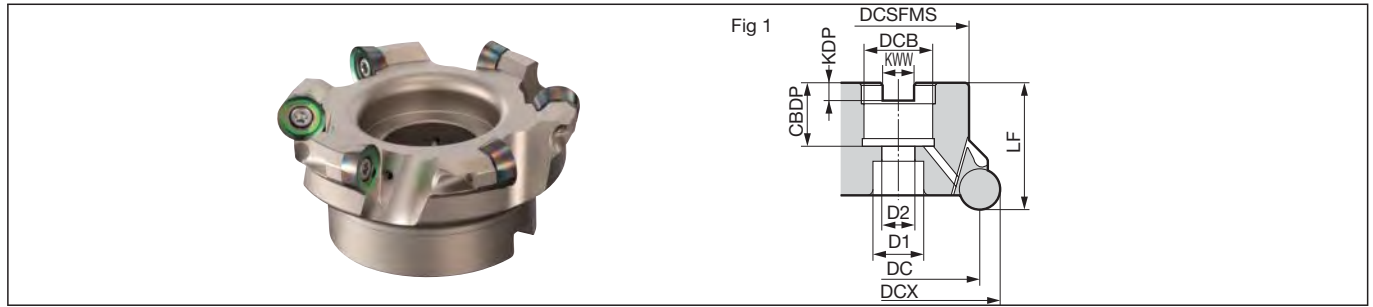

Body (Standard Pitch)

														Dimensions (mm)	
Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig	
Metric	WRCX 12040RS	●	40	28	40	16	8.4	5.6	18	14	9	4	0.2	1	
	12050RS	●	50	38	40	22	10.4	6.3	20	18	11	4	0.2	1	
	12063RS	●	63	51	40	22	10.4	6.3	20	18	11	5	0.4	1	
	12080RS	●	80	68	55	50	12.4	7.0	25	20	13.5	6	0.9	1	

Inserts are sold separately.
 Note: The values in red have been changed from the 2021-2022 General Catalogue.

Body (Extra Fine Pitch)

														Dimensions (mm)	
Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig	
Metric	WRCXF 12050RS	●	50	38	40	22	10.4	6.3	20	18	11	5	0.2	1	
	12063RS	●	63	51	40	22	10.4	6.3	20	18	11	6	0.4	1	

Inserts are sold separately.
Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (M12 x 30 to 35mm).

Insert (Common)

Grade Classification		Coated Carbide		Cemented Carbide	DLC	Dimensions (mm)						
Process	High-speed/Light Cutting	P	M	K	N	Inscribed Circle IC	Corner Radius RE	Thickness S	Fig	Fig 1 8-cornered		
	General-purpose	P	M	K	N					Fig 2 Non-Ferrous Metals 4 corners		
	Roughing	P	M	K	N					Fig 3 Surfing Insert 4 corners		
Applications	Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	H1	DL1000				
	General-purpose	QPMT 120440 PPEN	●	●	●	●	—	—	12	4.0	4.76	1
		120440 PPEN-H*	●	●	●	●	—	—	12	4.0	4.76	1
	Non-Ferrous Metals	QPET 120460 PPFR-S	—	—	—	—	●	●	12	6.0	4.76	2
Surfing	QPMT 120460 PPER-R	●	●	—	—	—	—	12	6.0	4.76	3	

*: -H at the end indicates strong edged.

Parts

Flat Insert Screw	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit	
BFTX0409IP	3.0	HPS1015	TRB151P SUMI-P



Recommended Cutting Conditions

Diameter ø40 to ø80mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	100-160-200	0.20-0.40-0.60	ACP200
	Alloy Steel	180 to 280HB	100-140-180	0.20-0.30-0.40	ACP200
M	Stainless Steel	—	80-120-160	0.10-0.20-0.30	ACP300
K	Cast Iron	250HB	80-120-160	0.10-0.20-0.40	ACK200
N	Non-Ferrous Metals	—	200-500-1,000	0.10-0.30-0.40	DL1000

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WRCX(F) 16000R(S) type



Body (Standard Pitch)

Dimensions (mm)

Metric	Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
	WRCX 16063RS	●	63	47	50	40	22	10.4	6.3	20	18	11	3	0.4	1
	16080RS	●	80	64	55	50	27	12.4	7.0	25	20	13.5	4	0.8	1
	16100RS	●	100	84	70	50	32	14.4	8.5	32	46	—	5	1.2	2
	16080R	●	80	64	55	50	25.4	9.5	6.0	25	20	13	4	0.8	1
	16100R	●	100	84	70	63	31.75	12.7	8.0	32	46	17	5	1.4	1

Inserts are sold separately.

Body (Extra Fine Pitch)

Dimensions (mm)

Metric	Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
	WRCXF 16063RS	●	63	47	50	40	22	10.4	6.3	20	18	11	4	0.4	1
	16080RS	●	80	64	55	50	27	12.4	7.0	25	20	13.5	5	0.7	1
	16100RS	●	100	84	70	50	32	14.4	8.5	32	46	—	6	1.2	2

Inserts are sold separately.


Note For mounting the cutters marked with * to an arbor, use a JIS B1176 hex socket bolt (ø80: M12 x 30 to 35mm, ø100: M16 x 40 to 45mm).

Insert

Dimensions (mm)

Process	Grade Classification				Cemented Carbide	DLC
	High-speed/Light Cutting	Coated Carbide	Coated Carbide	Coated Carbide		
General-purpose	P	M	K	N		
Roughing	P	M	K	N		

Applications	Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	H1	DL1000	Inscribed Circle IC	Corner Radius RE	Thickness S	Fig
General-purpose	QPMT 160660 PPEN	●	●	●	●	●	—	—	16	6.0	6.5	1
	160660 PPEN-H¹	●	●	●	●	●	—	—	16	6.0	6.5	1
Anti-Vibration ²	QPMT 160608 PPEN	●	●	●	●	●	—	—	16	0.8	6.5	1
	160608 PPEN-CP	●	●	●	●	●	—	—	16	0.8	6.5	2
Non-Ferrous Metals	QPET 160680 PPR-S	—	—	—	—	—	●	●	16	8.0	6.5	3
Surfing	QPMT 160680 PPR-R	●	●	—	—	—	—	—	16	8.0	6.5	4

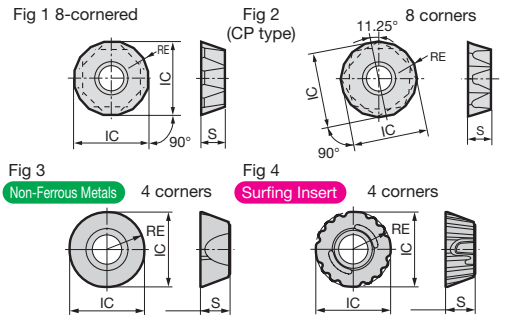

¹: -H at the end indicates strong cutting edge type.

²: For insert arrangements in anti-vibration applications, place the 08 type and 08-CP type alternately. Only even numbers of cutting edges are usable.

Parts

Flat Insert Screw	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit	
BFTX0511IP	5.0	HPL2025 TRB20IP	SUMI-P

Recommended Cutting Conditions

Diameter ø40 to ø80mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	100- 160 -200	0.20- 0.40 -0.60	ACP200
	Alloy Steel	180 to 280HB	100- 140 -180	0.20- 0.30 -0.40	ACP200
M	Stainless Steel	—	80- 120 -160	0.10- 0.20 -0.30	ACP300
K	Cast Iron	250HB	80- 120 -160	0.10- 0.20 -0.40	ACK200
N	Non-Ferrous Metals	—	200- 500 -1,000	0.10- 0.30 -0.40	DL1000


Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Diameter ø100 to ø160mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	150- 200 -250	0.30- 0.40 -0.60	ACP200
	Alloy Steel	180 to 280HB	100- 160 -200	0.10- 0.30 -0.50	ACP200
M	Stainless Steel	—	160- 180 -200	0.15- 0.20 -0.30	ACP300
K	Cast Iron	250HB	100- 150 -200	0.10- 0.15 -0.20	ACK200
N	Non-Ferrous Metals	—	200- 500 -1,000	0.20- 0.40 -0.60	DL1000

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WRCX 20000R type

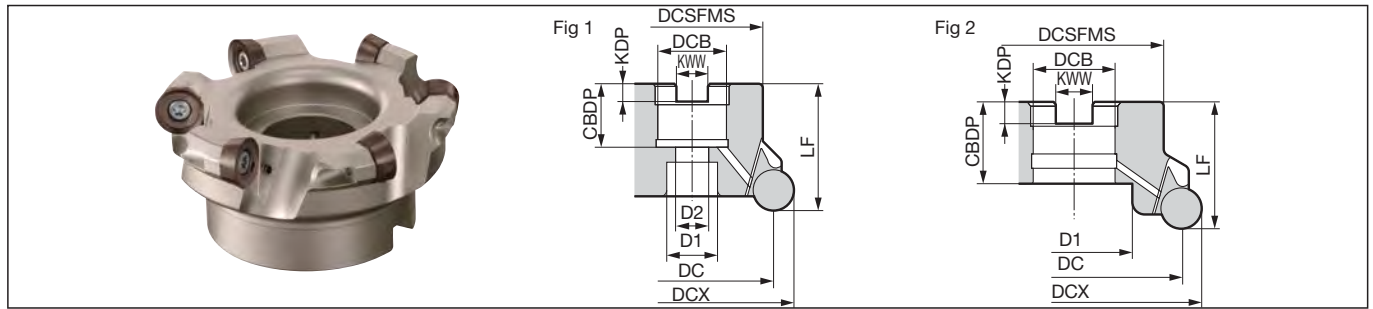

Body

														Dimensions (mm)	
Inch	Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
	WRCX 20125R	●	125	105	80	63	38.1	15.9	10.0	35.5	55	30	5	2.3	1
	20160R	●	160	140	100	63	50.8	19.1	11.0	41.5	72	—	6	4.0	2

Inserts are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide	Cemented Carbide	DLC	Dimensions (mm)							
Process	High-speed/Light Cutting	P	K	N								
	General-purpose	M	K	N								
	Roughing	M	K	N								
Applications	Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	H1	DL1000	Inscribed Circle IC	Corner Radius RE	Thickness S	Fig
General-purpose	QPMT 200670 PPEN	●	●	●	●	—	—	—	20	7.0	6.5	1
	200670 PPEN-H ¹	●	●	●	●	—	—	—	20	7.0	6.5	1
Anti-Vibration ²	QPMT 200608 PPEN	●	●	●	●	—	—	—	20	0.8	6.5	1
	200608 PPEN-CP	●	●	●	●	—	—	—	20	0.8	6.5	2
Surfing	QPMT 2006100 PPER-R	●	●	—	—	—	—	—	20	10.0	6.5	3

*1: -H at the end indicates strong cutting edge type.

*2: For insert arrangements in anti-vibration applications, place the 08 type and 08-CP type alternately.

Parts

Applicable Cutter	Flat Insert Screw		Integrated Wrench	Detachable Wrench		Anti-seizure Cream
	Handle Grip	Bit				
WRCX 20125R	BFTX0615IP	7.5	—	HPL2025	TRB25IP	SUMI-P
WRCX 20160R	BFTX0615IP	7.5	TRDR25IP	—	—	


Recommended Cutting Conditions

Diameter ø100 to ø160mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	150-200-250	0.30-0.40-0.60	ACP200
	Alloy Steel	180 to 280HB	100-160-200	0.10-0.30-0.50	ACP200
M	Stainless Steel	—	160-180-200	0.15-0.20-0.30	ACP300
K	Cast Iron	250HB	100-150-200	0.10-0.15-0.20	ACK200

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WRCX 08000E(S/M)/10000E(S/M)/16000E(S/M) type



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

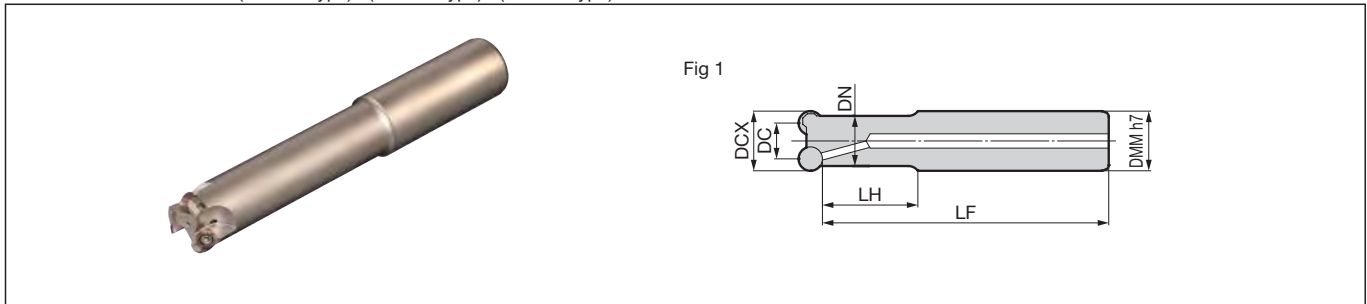

Body (Applicable Insert IC = 8mm type) Dimensions (mm)

Cat. No.	Stock	Dia.		Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
		Max. Dia. DCX	DC							
WRCX 08020ES	●	20	12	20	18	50	130	2	0.2	1
08020EM	●	20	12	20	18	100	180	2	0.3	1
08020EL	●	20	12	20	18	130	250	2	0.5	1
WRCX 08025ES	●	25	17	25	21	50	130	3	0.4	1
08025EM	●	25	17	25	21	100	180	3	0.5	1
08025EL	●	25	17	25	21	130	250	3	0.7	1

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream
WRCX08000E type	BFTX025061P	1.5 TRDR08IP	SUMI-P
WRCX10000E type	BFTX035841P	3.0 TRDR15IP	
WRCX16000E type	BFTX05111P	5.0 TRDR20IP	

Recommended Cutting Conditions

Diameter ø20 to ø32mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	80-120-160	0.10-0.30-0.40	ACP200
	Alloy Steel	180 to 280HB	60-100-140	0.10-0.20-0.30	ACP200
M	Stainless Steel	—	60-100-120	0.10-0.15-0.20	ACP300
K	Cast Iron	250HB	60-80-120	0.10-0.20-0.30	ACK200
N	Non-Ferrous Alloys	—	200-500-1,000	0.10-0.20-0.30	DL1000

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Diameter ø40 to ø50mm

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	100-160-200	0.20-0.40-0.60	ACP200
	Alloy Steel	180 to 280HB	100-140-180	0.20-0.30-0.40	ACP200
M	Stainless Steel	—	80-120-160	0.10-0.20-0.30	ACP300
K	Cast Iron	250HB	80-120-160	0.10-0.20-0.40	ACK200
N	Non-Ferrous Alloys	—	200-500-1,000	0.10-0.30-0.40	DL1000

Note: The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Body (Applicable Insert IC = 10mm type) Dimensions (mm)

Cat. No.	Stock	Dia.		Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
		Max. Dia. DCX	DC							
WRCX 10025ES	●	25	15	25	21	50	130	2	0.4	1
10025EM	●	25	15	25	21	100	180	2	0.5	1
10025EL	●	25	15	25	21	130	250	2	0.7	1
WRCX 10032ES	●	32	22	32	28	50	130	3	0.7	1
10032EM	●	32	22	32	28	120	200	3	1.0	1
10032EL	●	32	22	32	28	180	300	3	1.5	1


Body (Applicable Insert IC = 16mm type) Dimensions (mm)

Cat. No.	Stock	Dia.		Shank DMM	Diameter DN	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
		Max. Dia. DCX	DC							
WRCX 16040ES	●	40	24	32	31.3	50	170	2	0.9	1
16040EM	●	40	24	32	31.3	50	250	2	1.4	1
WRCX 16050ES	●	50	34	32	40.8	50	170	3	1.0	1
16050EM	●	50	34	32	40.8	50	250	3	1.5	1

Inserts are sold separately.

Insert

Process	Grade Classification				Coated Carbide	Cemented Carbide	DLC	Dimensions (mm)								
	High-speed/Light Cutting							IC	RE	S	Fig					
	P	M	K	N												
General-purpose	High-speed/Light Cutting				●	●	●	●	●	●	●	●	●			
Applications	General-purpose				●	●	●	●	●	●	●	●	●			
	Roughing				●	●	●	●	●	●	●	●	●			
	Cat. No.				ACP100	ACP200	ACP300	ACK200	ACK300	H1	DL1000	Inscribed Circle IC	Corner Radius RE	Thickness S		
	General-purpose				●	●	●	●	●	—	—	8	3.0	3.18	1	WRCX08000E type
	Anti-Vibration ²				●	●	●	●	●	—	—	10	3.5	3.97	1	WRCX10000E type
Non-Ferrous Metals	Surfing				●	●	●	●	●	—	—	16	6.0	6.5	1	WRCX16000E type
	Surfing				●	●	●	●	●	—	—	16	6.0	6.5	1	WRCX16000E type
	Surfing				●	●	●	●	●	—	—	16	0.8	6.5	1	WRCX16000E type
Cast Iron, High-Speed	Surfing				●	●	●	●	●	—	—	16	8.0	6.5	3	WRCX10000E type
	Surfing				●	●	●	●	●	—	—	16	8.0	6.5	3	WRCX16000E type
	Surfing				●	●	●	●	●	—	—	16	8.0	6.5	4	WRCX16000E type

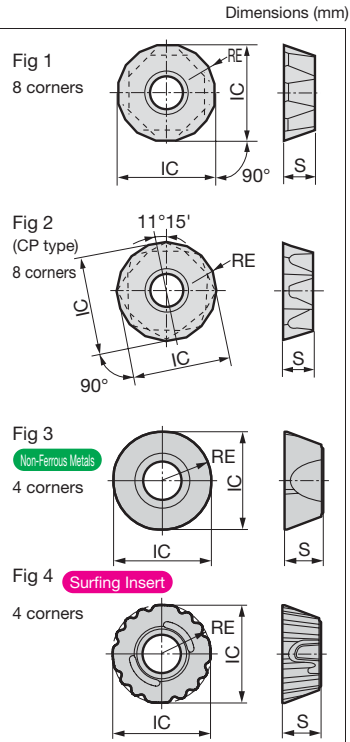

*1: -H at the end indicates strong cutting edge type. *2: For insert arrangements in anti-vibration applications, place the 08 type and 08-CP type alternately.

WBMR series



■ Features

A lineup of $\phi 20$ to $\phi 50$ mm ballnose shank type cutter models for 3D profile roughing of die molds and machine parts.

● WBMR2000/2000L ($\phi 20$ to $\phi 50$ mm)

- Wave-shaped high rake angle insert design achieves a sharp cutting edge and low cutting force
- Economical M-class insert with strong cutting edge
- Anti-rotation guides prevent insert from slipping during machining
- Integrated insert shape is used for large diameter cutters ($\phi 40$, $\phi 50$), enabling easier tool management

● WBMR type Anti-Rotation Mechanism

Cutter insert pocket

Insert Set

Circumferential movement of the insert caused by cutting force is controlled by guide faces (A) and (B) and anti-rotation (C) to allow stable cutting.

WBMR2000 ($\phi 20$ to $\phi 50$ mm)

(WBMR2250S)

WBMR2000L ($\phi 20$ to $\phi 50$ mm)

(WBMR2500SL)


■ Application Examples

● Cold Molding Die (SKD11)

Evaluation
Evaluation of flank wear width after continuous cutting for seven hours was less than competitor's product. Stable cutting was observed.

WBMR2200S ($\phi 20$)
Insert Grade: ACZ350
Cutting Conditions
 $n = 2,200\text{min}^{-1}$
 $v_f = 500\text{mm/min}$
 $a_p = 0.3$ to 2mm
Non-water-soluble Cutting Oil

■ Performance

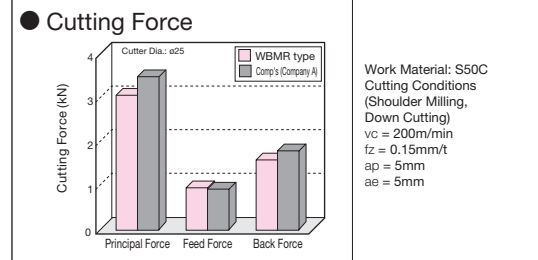

■ Product Range

Type	Cat. No.	Dia. (mm)				
		$\phi 20$	$\phi 25$	$\phi 30$	$\phi 40$	$\phi 50$
Shank	WBMR 2000S	●	●	●	●	●
	WBMR 2000M	●	●	●	●	●
	WBMR 2000L	●	●	●	●	●
	WBMR 2000S(M/L)-C					●
	WBMR 2000SL	●	●	●	●	●
	WBMR 2000ML	●	●	●	●	●
	WBMR 2000LL	●	●	●	●	●
	WBMR 2000S(M/L)L-C					●

■ Parts

Applicable Cutter <small>□ indicates S/M/L type</small>	Part Name	Short Edge type	Long Edge type (-L)		Anti-seizure Cream
		For Tip Insert	For Tip Insert	For Peripheral Cutting Edge	
WBMR2200□(L)	Flat Insert Screw	BFTX0307N $\text{N}\cdot\text{m}$ 2.0			SUMI-P
	Wrench	TRX10			
WBMR2250□(L)	Flat Insert Screw	BFTX0409N $\text{N}\cdot\text{m}$ 3.0			
	Wrench	TRD15			
WBMR2300□(L)	Flat Insert Screw	BFTX0511N $\text{N}\cdot\text{m}$ 5.0	BFTX0407N $\text{N}\cdot\text{m}$ 3.0		
	Wrench	TRD20	TRD15		
WBMR2400□(L)	Flat Insert Screw	BFTX0619N $\text{N}\cdot\text{m}$ 7.5	BFTX0409N $\text{N}\cdot\text{m}$ 3.0		
	Wrench	TRD25	TRD15		
WBMR2500□(L) WBMR2500□(L)-C	Flat Insert Screw	BFTX0619N $\text{N}\cdot\text{m}$ 7.5	BFTX0409N $\text{N}\cdot\text{m}$ 3.0		
	Wrench	TRD25	TRD15		

Recommended Cutting Conditions

(A) Tip insert only

ISO	Work Material	Hardness	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	100-150-200	0.10-0.20-0.30	ACP200
	Alloy Steel	180 to 280HB	70-100-120	0.10-0.20-0.30	ACP200
M	Stainless Steel, Die Steel	—	50-80-100	0.10-0.15-0.20	ACP300
K	Cast Iron	250HB	100-120-150	0.20-0.30-0.40	ACK300



Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

(B) Tip insert and peripheral cutting edge

ISO	Work Material	Hardness	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	80-120-150	0.10-0.20-0.30	ACP200
	Alloy Steel	180 to 280HB	50-80-100	0.10-0.20-0.30	ACP200
M	Stainless Steel, Die Steel	—	40-60-80	0.10-0.15-0.20	ACP300
K	Cast Iron	250HB	80-100-120	0.20-0.30-0.40	ACK300

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WBMR 2000 type

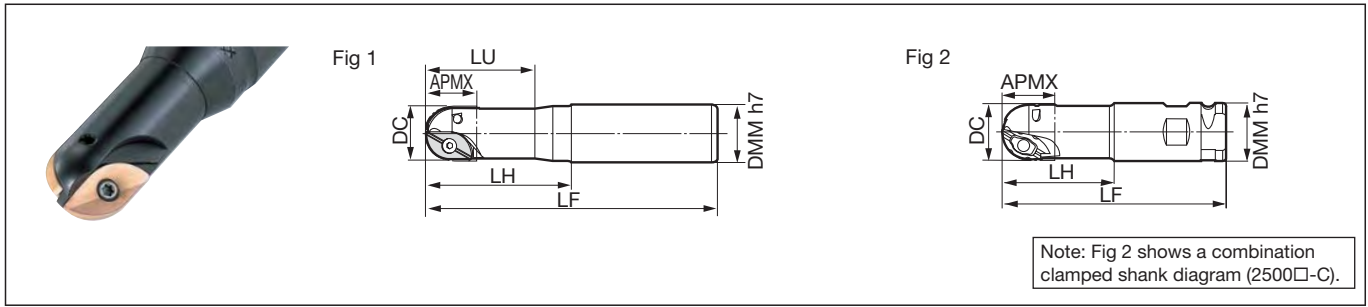

Body

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Length LU	Overall Length LF	Fig
WBMR 2200S	●	20	20	25	60	40	140	1
2200M	●	20	20	25	60	40	200	1
2200L	●	20	20	25	80	40	250	1
WBMR 2250S	●	25	23	32	70	50	150	1
2250M	●	25	23	32	73	50	220	1
2250L	●	25	23	32	100	50	300	1
WBMR 2300S	●	30	28	32	80	60	160	1
2300M	●	30	28	32	85	60	240	1
2300L	●	30	28	32	120	60	350	1
WBMR 2400S	●	40	35	42	100	—	200	1
2400M	●	40	35	42	180	—	280	1
2400L	●	40	35	42	250	—	350	1
WBMR 2500S	●	50	47	42	100	—	200	1
2500M	●	50	47	42	180	—	280	1
2500L	●	50	47	42	250	—	350	1
WBMR 2500S-C	●	50	47	50.8	100	—	200	2
2500M-C	●	50	47	50.8	180	—	280	2
2500L-C	●	50	47	50.8	250	—	350	2

Inserts are sold separately.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide											
	High-speed/Light Cutting	P	M	K								
Process	General-purpose	●	●	●								
	Roughing	●	●	●								
Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	Length L	Width W1	Thickness S	Corner Radius RE	Fig	Applicable Milling Cutters	Remarks
ZNMT 1804100-C	●	●	●	●	●	18.00	9.76	4.76	10	1	WBMR 2200□	· Tip inserts are used in combination according to Fig 1 & 2.
2004100-S	●	●	●	●	●	20.00	7.50	4.37	10	2		
ZNMT 2205125-C	●	●	●	●	●	22.50	12.20	5.70	12.5	1	WBMR 2250□	· Tip inserts are used in combination according to Fig 1 & 2.
2305125-S	●	●	●	●	●	23.00	9.38	5.56	12.5	2		
ZNMT 2706150-C	●	●	●	●	●	27.00	14.64	6.75	15	1	WBMR 2300□	· Tip inserts are used in combination according to Fig 1 & 2.
2806150-S	●	●	●	●	●	28.00	11.25	6.35	15	2		
ZNMT 3608200	●	●	●	●	●	36.00	19.50	8.65	20	3	WBMR 2400□	· Use two of the items shown in Fig 3 as the tip inserts.
ZNMT 4310250	●	●	●	●	●	43.00	25.70	10.15	25	3	WBMR 2500□	· Use two of the items shown in Fig 3 or Fig 4 (nicked) as the tip inserts.
4310250-N	●	●	●	●	●	43.00	25.70	10.15	25	4		


Parts H207 Recommended Cutting Conditions H207

Milling Cutters
 Face Milling
 Shoulder Milling
 High-Feed
 Multi-purpose
 Radius
 Radial/3D Profiling
 Side Cutters T-Slot Cutters
 Chamfering
 Non-Ferrous Metals
 Cast Iron, High-Speed

WBMR 2000L type



Rake Angle	Radial	—
	Axial	-10°

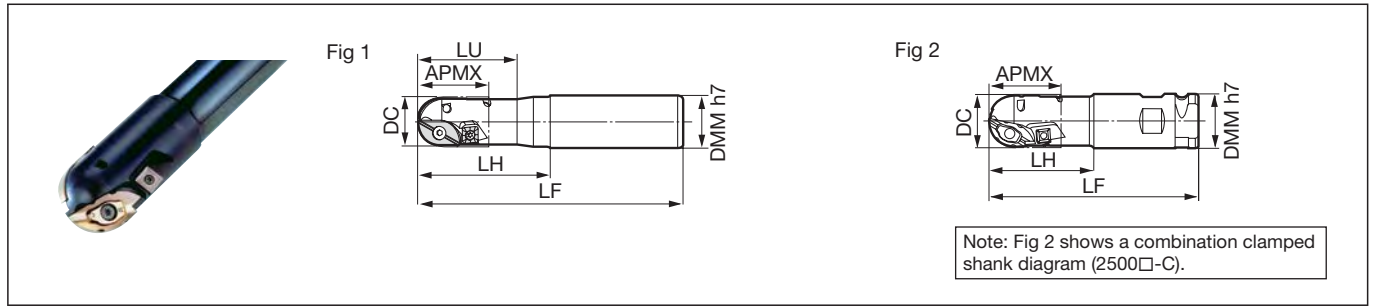

Body

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Depth of Cut		Shank DMM	Head LH	Length		Overall Length LF	Fig
			APMX	APMX			LU	LF		
WBMR 2200SL	●	20	30	30	25	60	40	140	1	
2200ML	●	20	30	30	25	60	40	200	1	
2200LL	●	20	30	30	25	80	40	250	1	
WBMR 2250SL	●	25	38	38	32	70	50	150	1	
2250ML	●	25	38	38	32	73	50	220	1	
2250LL	●	25	38	38	32	100	50	300	1	
WBMR 2300SL	●	30	42	42	32	80	60	160	1	
2300ML	●	30	42	42	32	85	60	240	1	
2300LL	●	30	42	42	32	120	60	350	1	
WBMR 2400SL	●	40	50	50	42	100	—	200	1	
2400ML	●	40	50	50	42	180	—	280	1	
2400LL	●	40	50	50	42	250	—	350	1	
WBMR 2500SL	●	50	69	69	42	100	—	200	1	
2500ML	●	50	69	69	42	180	—	280	1	
2500LL	●	50	69	69	42	250	—	350	1	
WBMR 2500SL-C	●	50	69	69	50.8	100	—	200	2	
2500ML-C	●	50	69	69	50.8	180	—	280	2	
2500LL-C	●	50	69	69	50.8	250	—	350	2	

Inserts are sold separately.

Insert

Dimensions (mm)

Fig 1

Fig 2

Fig 3

Fig 4

Fig 5

Grade Classification	Coated Carbide			
	High-speed/Light Cutting	P	M	K
Process	General-purpose	●	●	●
	Roughing	●	●	●

Cat. No.	ACP100	ACP200	ACP300	ACK200	ACK300	Length L	Width W1	Thickness S	Corner Radius RE	Fig	Applicable Milling Cutters	Remarks
2004100-S	●	●	●	●	●	20.00	7.50	4.37	10	2		
SPMT 070308	●	●	●	●	●	7.94	—	3.18	—	3		
ZNMT 2205125-C	●	●	●	●	●	22.50	12.20	5.70	12.5	1	WBMR 2250□L	· Tip inserts are used in combination according to Fig 1 & 2. · Peripheral cutting edge (Fig 3) for 2250□L only.
2305125-S	●	●	●	●	●	23.00	9.38	5.56	12.5	2		
SPMT 09T308	●	●	●	●	●	9.53	—	3.97	—	3		
ZNMT 2706150-C	●	●	●	●	●	27.00	14.64	6.75	15	1	WBMR 2300□L	· Tip inserts are used in combination according to Fig 1 & 2. · Peripheral cutting edge (Fig 3) for 2300□L only.
2806150-S	●	●	●	●	●	28.00	11.25	6.35	15	2		
SPMT 09T308	●	●	●	●	●	9.53	—	3.97	—	3		
ZNMT 3608200	●	●	●	●	●	36.00	19.50	8.65	20	4	WBMR 2400□L	· Use two of the items shown in Fig 4 as the tip inserts. · Peripheral cutting edge (Fig 3) for 2400□L only.
SPMT 09T308	●	●	●	●	●	9.53	—	3.97	—	3		
ZNMT 4310250	●	●	●	●	●	43.00	25.70	10.15	25	4	WBMR 2500□L	· Use two of the items shown in Fig 4 or Fig 5 (nicked) as the tip inserts. · Peripheral cutting edge (Fig 3) for 2500□L only.
4310250-N	●	●	●	●	●	43.00	25.70	10.15	25	5		
SPMT 120408	●	●	●	●	●	12.70	—	4.76	—	3		

Parts H207 Recommended Cutting Conditions H207

Milling Cutters

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

WBMF series

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

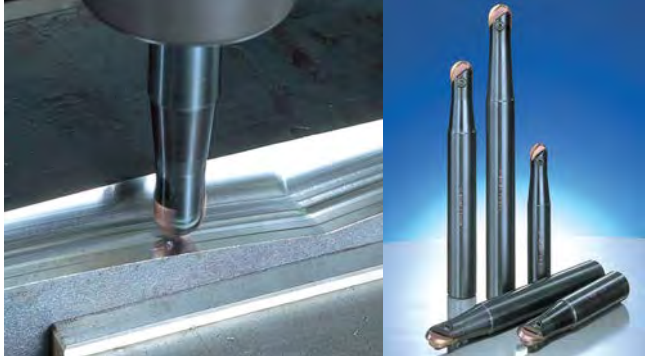


■ Features

A lineup of $\phi 10$ to $\phi 30$ mm ballnose shank type cutter models for 3D profile finishing of die molds and machine parts.

● WBMF1000 type ($\phi 10$ to $\phi 30$ mm)

- Simple but precise clamping design.
- Original large helix angle design.
- Sharp cutting edge that produces good surface roughness.
- Excellent wear resistance with Super ZX Coat.


■ Performance

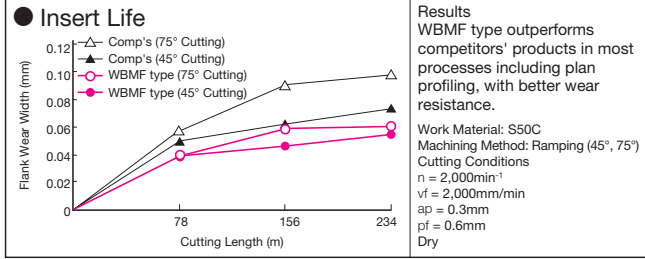

■ Product Range

Type	Cat. No.	Dia. (mm)					
		$\phi 10$	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 30$
Shank	WBMF 1000S	●	●	●	●	●	●
	WBMF 1000M	●	●	●	●	●	●
	WBMF 1000L	●	●	●	●	●	●


● WBMF type clamp mechanism.

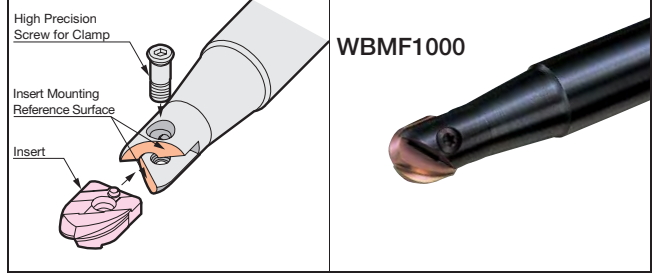

WBMF 1000 type



Rake Angle	Radial	—
	Axial	0°

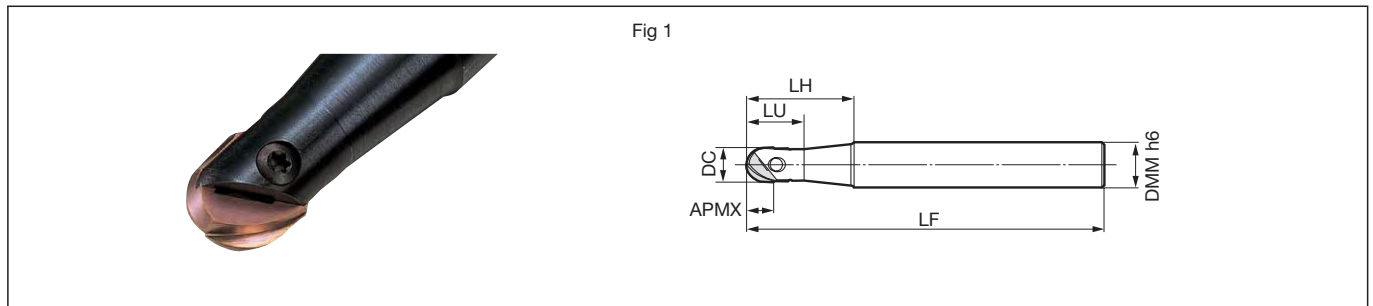


Body

Cat. No.	Stock	Dimensions (mm)							Fig
		Dia. DC	Max. Depth of Cut APMX	Shank DMM	Head LH	Length LU	Overall Length LF		
WBMF 1100S	●	10	9	16	30	17	100	1	
1100M	●	10	9	16	35	17	130	1	
1100L	●	10	9	16	50	17	180	1	
1120S	●	12	10.5	16	40	19.5	110	1	
1120M	●	12	10.5	16	40	19.5	150	1	
1120L	●	12	10.5	16	60	19.5	200	1	
1160S	●	16	12	20	50	25.5	130	1	
1160M	●	16	12	20	50	25.5	180	1	
1160L	●	16	12	20	70	25.5	220	1	
1200S	●	20	15	25	60	32	140	1	
1200M	●	20	15	25	60	32	200	1	
1200L	●	20	15	25	80	32	250	1	
1250S	●	25	18.5	32	70	36	150	1	
1250M	●	25	18.5	32	73	36	220	1	
1250L	●	25	18.5	32	100	36	300	1	
1300S	●	30	22.5	32	80	43	160	1	
1300M	●	30	22.5	32	85	43	240	1	
1300L	●	30	22.5	32	120	43	350	1	

Inserts are sold separately.

Insert

Grade Classification		Coated Carbide		Dimensions (mm)								
Process	High-speed/Light Cutting	P		Cat. No.	ACZ120	Dia. DC	Length L	Max. Depth of Cut APMX	Thickness S	Corner Radius RE	Applicable Cutter	Fig
	General-purpose											
	Roughing											
ZPGU 1551050	●	10	15.6	9	5.1	5.0	WBMF 1100	1				
1856060	●	12	18	10.5	5.6	6.0	WBMF 1120	1				
2061080	●	16	20.5	12	6.1	8.0	WBMF 1160	1				
2471100	●	20	24.5	15	7.1	10.0	WBMF 1200	1				
2876125	●	25	28.5	18.5	7.6	12.5	WBMF 1250	1				
3486150	●	30	34.4	22.5	8.6	15.0	WBMF 1300	1				

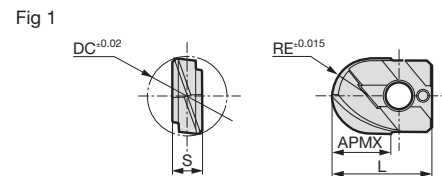

Parts

Applicable Cutter	Precision Screw	Wrench	Anti-seizure Cream
WBMF1100	BFTG0408F	3.0 TRD15	SUMI-P
WBMF1120	BFTG0409F		
WBMF1160	BFTG0513F	5.0 TRD20	
WBMF1200	BFTG0617F	7.5 TRD25	
WBMF1250	BFTG0621F		
WBMF1300	BFTG0825F		

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grades
			Min. - Optimum - Max.	Min. - Optimum - Max.			
P	Carbon Steel	180 to 280HB	200-250-300	0.10-0.20-0.30	ACZ120		
	Alloy Steel	180 to 280HB	100-150-200	0.10-0.20-0.30	ACZ120		

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

New



■ Features

- Side Cutter Suitable For A Variety Of Applications
 Made-to-order bodies possible with cutting width of 17mm and up.
 Suitable for various applications such as groove milling and shoulder milling.
- Realises Low Resistance and Low Vibration Milling
 Design emphasizes cutting edge sharpness with +10° inclination angle.
 Excellent cutting edge sharpness suppresses chatter to enable stable machining.
- Excellent Machined Surface Quality
 Proprietary insert array design minimizes joint steps at the groove bottom for excellent machining quality.
- Neutral-handed 4-cornered Insert
 Easy management with neutral-handed insert design that eliminates the need to align right-hand and left-hand inserts.

■ Product Range (Body)

Body: Made-to-order (custom design)

Standard design



Multi-stage design



Insert Cat. No.	Width of Cut CW (mm)						
	17	21	22	22.8	23.7	24.6	Over 24.6
TGCX130704PNEN-G	Standard design						Multi-stage design
TGCX130708PNEN-G	Standard design				Multi-stage design		
TGCX130712PNEN-G	Standard design			Multi-stage design			
TGCX130716PNEN-G	Standard design		Multi-stage design				
TGCX130720PNEN-G	Standard design		Multi-stage design				

Standard design CW upper limit value varies with insert.

■ Product Range (Insert)

Cat. No.	Corner Radius RE (mm)				
	0.4	0.8	1.2	1.6	2.0
TGCX1307○○PNEN-G	●	●	●	●	●

● mark: Standard stocked item

■ Chipbreaker

Work Material	P Steel, M stainless steel, K cast iron
Applications	General-purpose to roughing
Chipbreaker	G type TGCX 13
Cutting Edge Cross Section	

■ Suitable for Various Applications



Standard disc shape

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed


■ Sharp Edge Design

Design emphasizes cutting edge sharpness with +10° inclination angle.
 Excellent cutting edge sharpness suppresses chatter to enable stable machining.




Inclination Angle

True Rake Angle

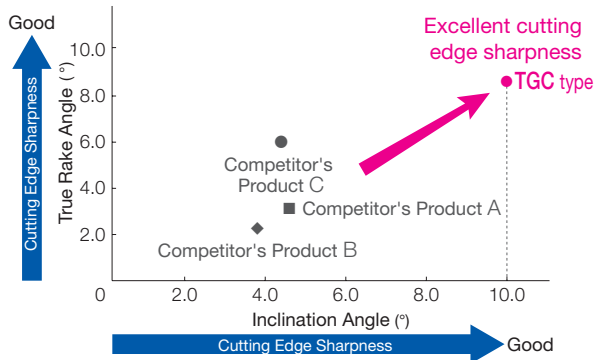


■ Cutting Performance

● Low Cutting Force

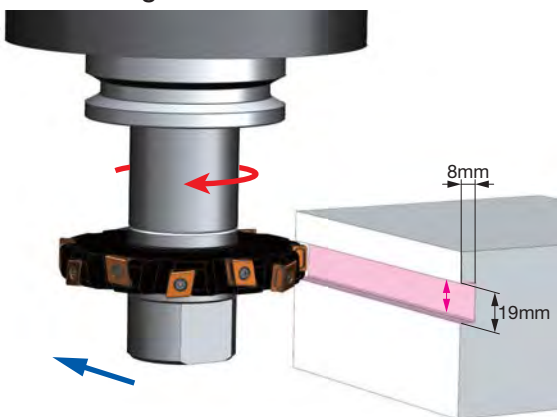


Machine : Vertical Machining Centre BT50, Work Material: S50C
 Tool : TGC 13125W19Z12RS (ø125, Width of Cut 19mm, 12 teeth)
 Insert : TGCX 130708PNEN-G (ACU2500)
 Cutting Conditions : $vc = 200\text{m/min}$ $fz = 0.2\text{mm/t}$ $ap = 19\text{mm}$ $ae = 8\text{mm}$,
 Down Cut, Dry


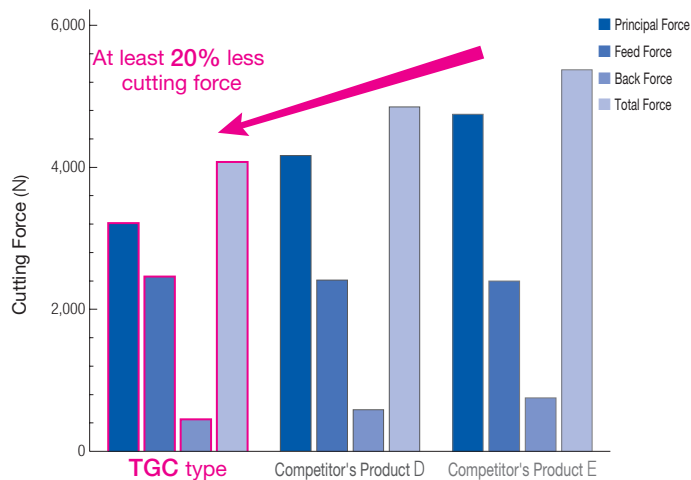


Excellent cutting edge sharpness eliminates chatter to enable stable machining

● Low Vibration

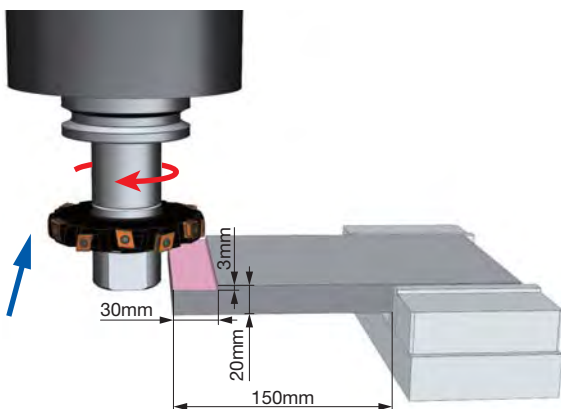



Machine : Vertical Machining Centre BT50, Work Material: FC250
 Tool : TGC 13125W19Z12RS (ø125, Width of Cut 19mm, 12 teeth)
 Insert : TGCX 130708PNEN-G (ACU2500)
 Cutting Conditions : $vc = 200\text{m/min}$ $fz = 0.2\text{mm/t}$ $ap = 3\text{mm}$ $ae = 30\text{mm}$,
 Down Cut, Dry

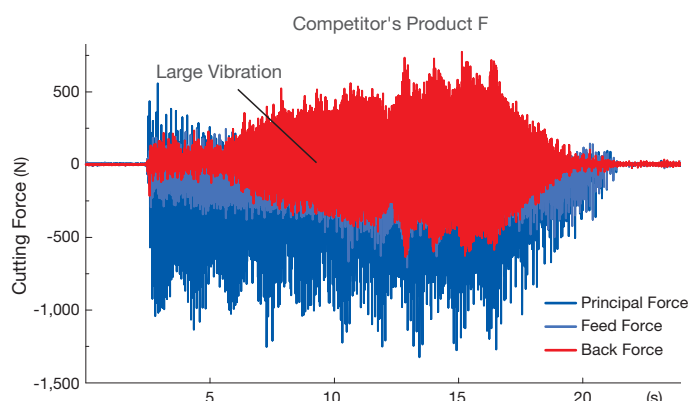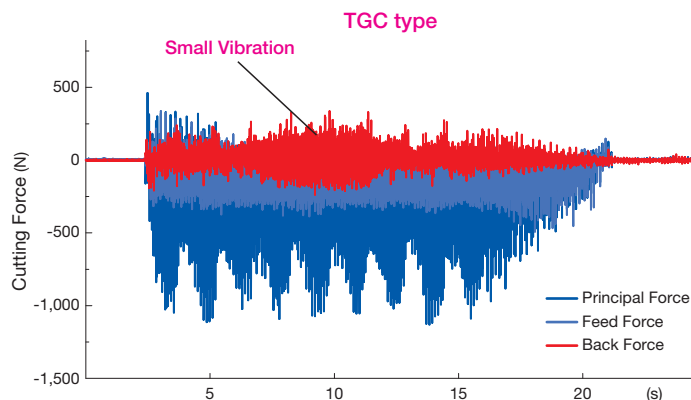

Suppresses chatter even when machining low-rigidity workpieces

● **Small Joint Steps At Groove Bottom**

Proprietary insert array design minimizes joint steps at groove bottom for excellent visual quality

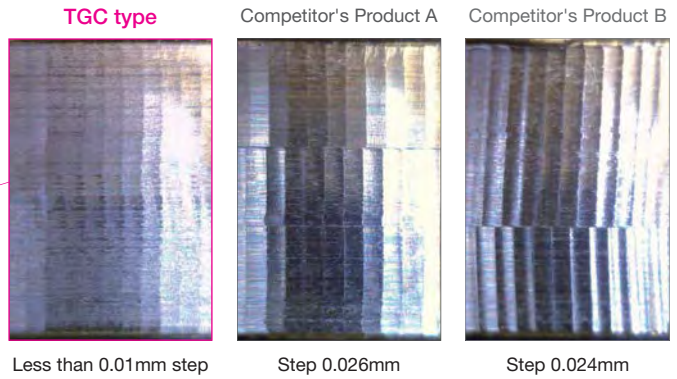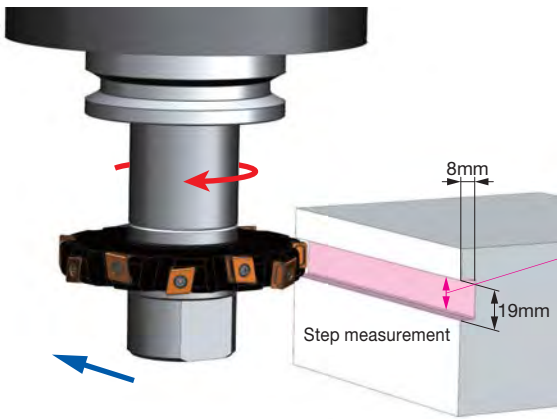


Machine : Vertical Machining Centre BT50, Work Material: S50C
 Tool : TGC 13125W19Z12RS (ø125, Width of Cut 19mm, 12 teeth)
 Insert : TGCX 130708PNEN-G (ACU2500)
 Cutting Conditions : $vc = 200\text{m/min}$ $fz = 0.2\text{mm/t}$ $ap = 19\text{mm}$ $ae = 8\text{mm}$,
 Down Cut, Dry

Excellent visual quality

*Results of in-house evaluation.

● **Neutral-handed 4-cornered Insert**


Easy management with neutral-handed insert design that eliminates the need to align right-hand and left-hand inserts

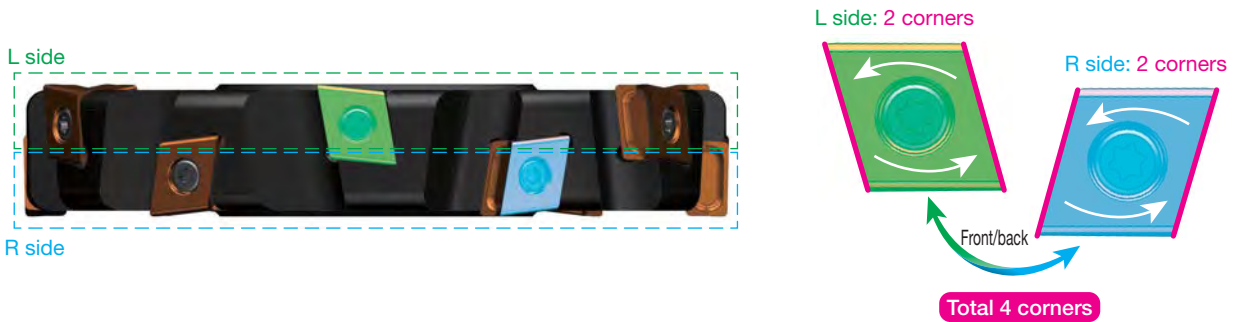

■ **Grade Features**

Work Material	Grade	Coating Thickness (µm)	Features
	ACU2500	3	Utilises ABSOTECH™ coating technology with excellent wear and chipping resistance. Its carbide substrate, with excellent fracture and wear resistance, achieves stable and long tool life for a variety of work materials.

Coating Layer Features

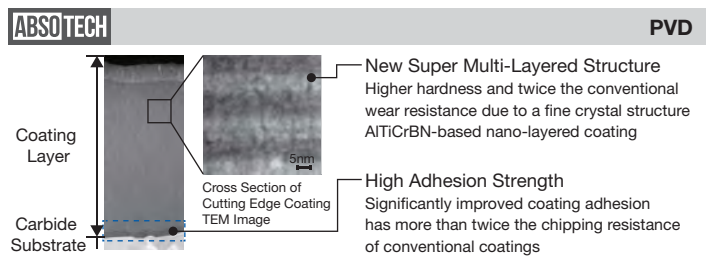

■ **Grade Application Range (TGC type)**

Work Material	Finishing to Light Cutting	Medium Cutting	Rough to Heavy Cutting
	ACU2500		
	ACU2500		
	ACU2500		

The letter "P" at the end of each grade indicates the coating type. ▲: PVD

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering



Non-Ferrous Metals

Cast Iron, High-Speed

New

Rake Angle	Radial Axial	-11.5° to -9.5° 10°
------------	--------------	------------------------

17.24.6mm 90°

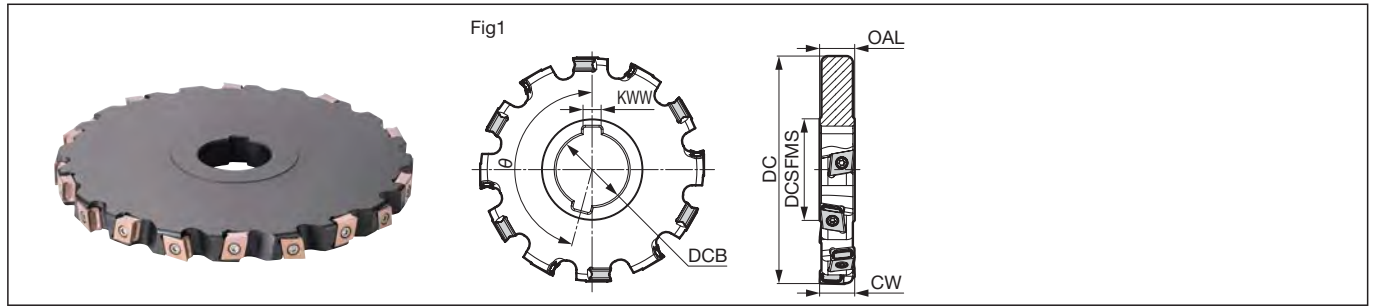

Body (Standard Disc Shape)

Dimensions (mm)

Metric	Cat. No.	Stock	Dia. DC	Boss DCSFMS	Width of Cut CW	Boss Thickness OAL	Hole Dia. DCB	Keyway Width KWW	Phase θ (°)	Total No. of Teeth	Weight (kg)	Fig
	13125W00Z12RS		125	55	17 to 24.6	= CW	40	10	165	12	1.29 up	1
	13160W00Z14RS		160	55	17 to 24.6	= CW	40	10	167.14	14	2.04 up	1
	13200W00Z16RS		200	69	17 to 24.6	= CW	50	12	168.75	16	3.33 up	1

Basic specifications have two keyways. (Also available with only one) Inserts are sold separately. The upper limit of width of cut CW is the value of inserts with corner radius RE0.4. For the width of cut CW upper limit values for each corner radius RE, see the Insert Cat. No. Table. Disc shapes other than the standard type can be designed.

Identification Code

TGC 13 125 W17 Z12 R S

Series Code Insert Size Dia. Width of Cut Number of Teeth Feed Direction Metric Bore


Parts

Insert Screw	Wrench	Anti-seizure Cream
BFTX0412IP	3.0	TRDR15IP SUMI-P

Insert

Dimensions (mm)

Grade Classification		Coated Carbide			
Process	High-speed/Light Cutting	P	M		
	Medium Cutting	P	M		
	Roughing	P	M		
Cat. No.	ACU2500	Corner Radius RE	Width of Cut CW Upper Limit	Fig	
	TGCX 130704PNEN-G	●	0.4	24.6	1
	130708PNEN-G	●	0.8	23.7	1
	130712PNEN-G	●	1.2	22.8	1
	130716PNEN-G	●	1.6	22.0	1
	130720PNEN-G	●	2.0	21.0	1



Recommended Cutting Conditions

ISO	Work Material	Hardness	Chipbreaker	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
P	Carbon Steel	180 to 280HB	G	100 - 200 - 300	0.1 - 0.2 - 0.25	ACU2500
	Alloy Steel	180 to 280HB	G	80 - 160 - 260	0.1 - 0.2 - 0.25	ACU2500
M	Stainless Steel	180 to 280HB	G	90 - 135 - 180	0.1 - 0.15 - 0.2	ACU2500
K	Cast Iron/Ductile Cast Iron	250HB	G	100 - 200 - 300	0.1 - 0.2 - 0.25	ACU2500

Note: The above figures are guidelines for simultaneous cutting with one R/L cutting tooth each, on a BT50 machine tool. The above recommended cutting conditions may require adjustment depending on machine rigidity and workpiece rigidity.

SEC-Sumi Dual Mill TGC type Made-To-Order Request Sheet

Select a cutter design and enter the dimensions in .

After completion, send the sheet to our nearest sales office or distributor.
 Feel free to contact us for other shapes or dimensions or with other requests.

Insert Series Configuration

Cat. No.	Dimensions (mm)				
	Corner Radius RE				
	0.4	0.8	1.2	1.6	2.0
TGCX 1307OOPNEN-G	●	●	●	●	●
TGCX 13 Width of Cut CW Upper Limit Value	24.6	23.7	22.8	22.0	21.0



A multi-stage design is required if the width of cut CW is wider than these upper limit values. ● mark: Standard stocked item

[Made-to-Order Insert Support]

Corner radius (RE) = 0.4 to 2.0mm supported.
 (Machined radius size may differ from the corner radius RE size of the mounted inserts)

Disc



Effective No. of Teeth Desired:
 Coolant Hole: Yes No
 Arbor Cat. No. Used:

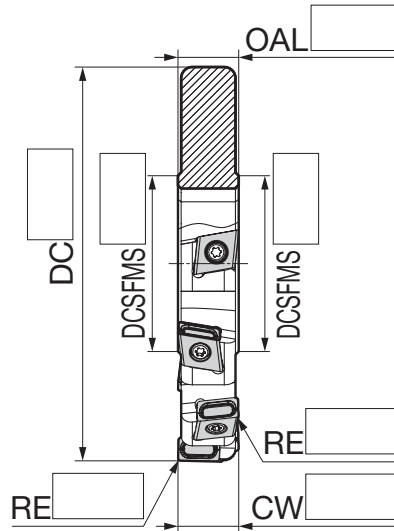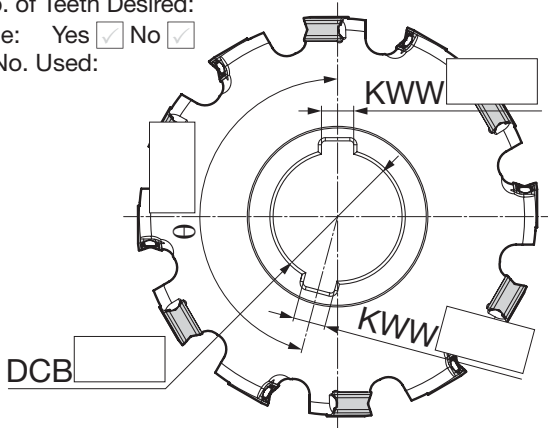

Basic specifications have two keyways. (Also available with only one)

With Boss

Effective No. of Teeth Desired:
 Coolant Hole: Yes No
 Arbor Cat. No. Used:
 Feed Direction:
 Right-handed
 Left-handed
 (Figure shows right-handed)

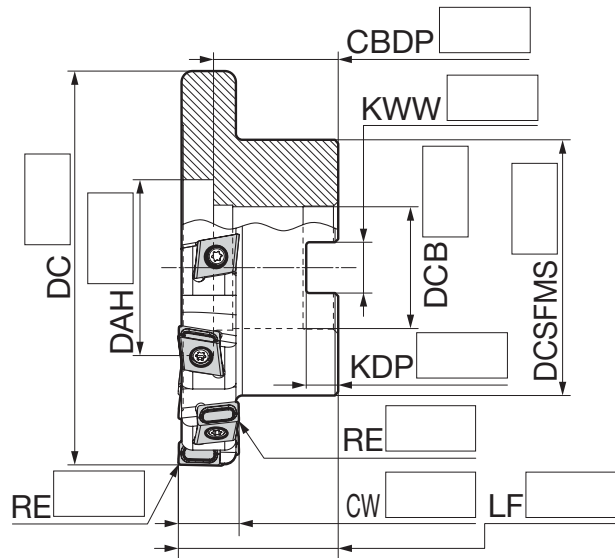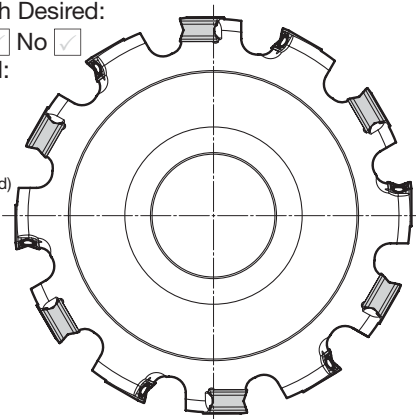

Designs for applications other than those listed above are possible, please consult us separately.




Company Name/Contact

Width of Cut CW Size Reference Specification

Width of Cut CW	Insert type
17 to 24.6mm	TGCX 13

- The above width of cut CW upper limit value is the value with insert corner radius RE0.4.
- For the width of cut CW upper limit values for each corner radius RE, see the Insert Series Configuration Table on the left.

Accessories

Flat Insert Screw	Wrench	Anti-seizure Cream
		

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling


Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

MEMO

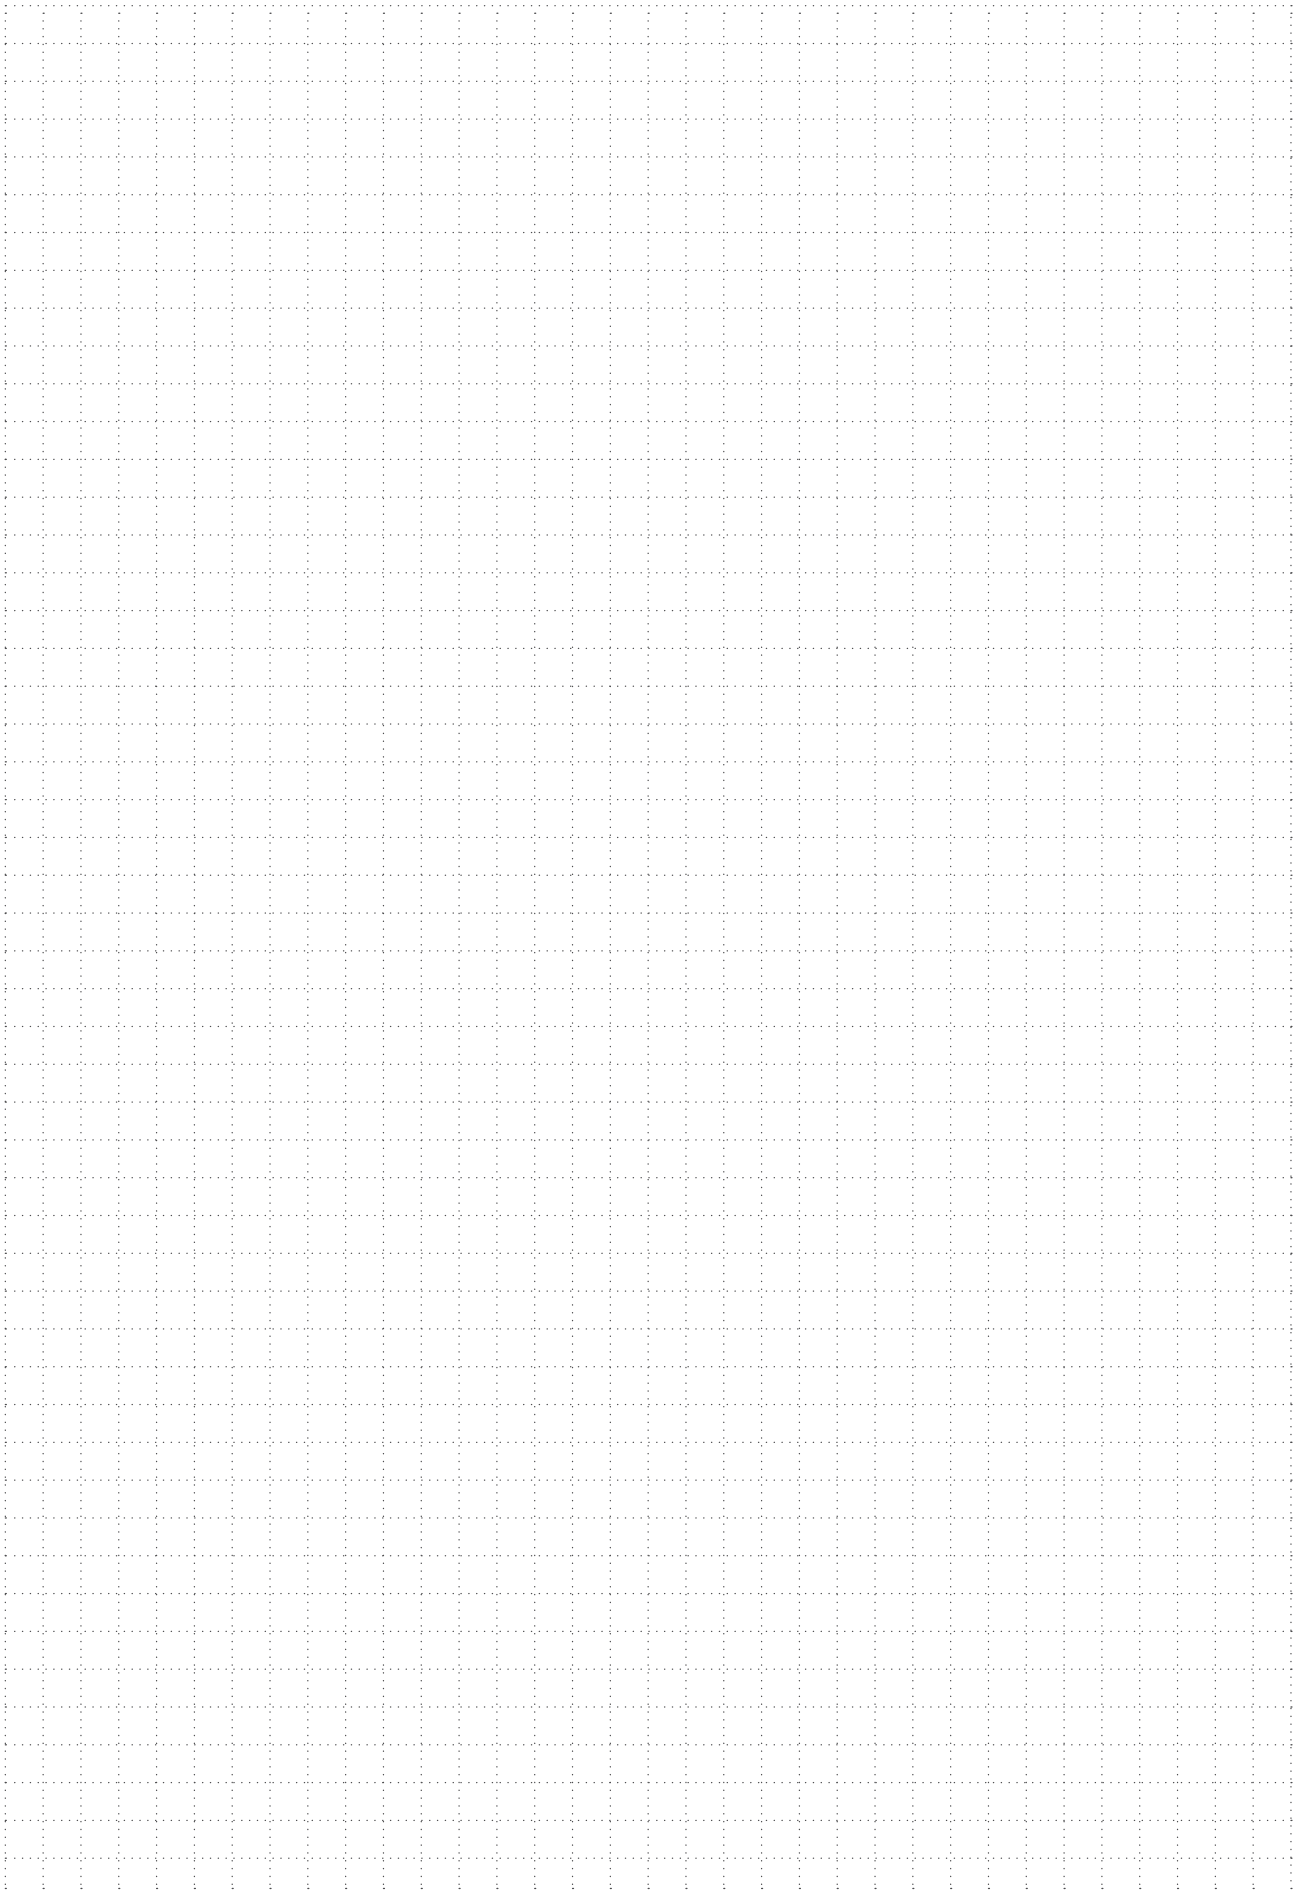

Rake Angle	Radial	0°
	Axial	0°


9.22mm 90°



Groove Milling



Fig 1

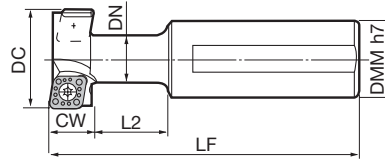

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

Body

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Diameter DN	Width CW	Length L2	Overall Length LF	Number of Teeth	Fig
TSE 2125	●	21	25	10.5	9	20	109	2	1
2525	●	25	25	12.5	11	21	112	2	1
3232	●	32	32	16.5	14	26	120	2	1
4032	●	40	32	20.5	18	32	130	2	1
5032	●	50	32	26.5	22	38	140	4	1


Inserts are sold separately.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide		Cemented Carbide						
	High-speed/Light Cutting	General-purpose	General-purpose	Roughing					
Process									
Cat. No.	AC630M	A30	G10E	Inscribed Circle IC	Thickness S	Corner Radius RE	Applicable Cutter	Fig	
CPMT 060204N-US	●	●	●	6.35	2.38	0.4	TSE 2125	1	
080308N-US	●	●	●	7.938	3.18	0.8	TSE 2525	1	
09T308N-US	●	●	●	9.525	3.97	0.8	TSE 3232	1	
CPMH 120408N-US	●	●	●	12.7	4.76	0.8	TSE 4032 TSE 5032	1	

Fig 1



Parts

Applicable Cutter	Flat Insert Screw		Wrench	Anti-seizure Cream
TSE2125	BFTX02506N	1.5	TRX08	SUMI-P
TSE2525	BFTX0307N	2.0	TRX10	
TSE3232	BFTX0407N	3.0	TRX15	
TSE4032	BFN0511T	5.0	TRX20	
TSE5032				

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grades
P	Carbon Steel	180 to 280HB	100-125-150	0.05-0.08-0.10	AC630M
P	Alloy Steel	180 to 280HB	60-80-100	0.03-0.05-0.08	AC630M
K	Cast Iron	250HB	60-80-100	0.05-0.08-0.10	G10E

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.



■ Features

The SEC-WaveMill WFXC type is a chamfering tool that uses a WFX series insert. A wide variety of grades supports various work materials.

In addition to the general-purpose grade ACU2500, applicable to various work materials, the new-generation coated carbide grades XCU2500/XCK2000 are now available.

Covering a wide variety of machining.

■ Precautions for Use


Chamfering tools use a straight cutting edge that enables the chamfering range to be changed depending on the corner radius (RE) of the insert mounted to the body.

Machining diameter: Use within the range shown in the table below, no lower than DC1 and no higher than DC2.

Depth of cut: Cutting to a depth shown by the distance from the tool tip (a) in a straight line to the cutting edge (b) is possible.



Dimensions (mm)

Body	Insert		Chamfering				Back Chamfering				Max. Dia.
			Min. Machining Dia.	Max. Machining Dia.	Minimum Depth	Maximum Depth	Min. Machining Dia.	Max. Machining Dia.	Minimum Depth	Maximum Depth	
	Cat. No.	RE	DC1	DC2	a	b	DC3	DC4	c	d	
WFXC08008E	SOMT080304	0.4	7.5	15.8	0.1	4.1	9.3	17.6	5.8	9.9	17.8
	SOMT080308	0.8	8.0	15.8	0.2	3.9	9.3	17.1	5.9	9.8	17.5
	SOMT080312	1.2	8.5	15.8	0.4	3.6	9.3	16.6	6.0	9.6	17.2
WFXC08016E WFXC08016M	SOMT080304	0.4	15.5	23.8	0.1	4.1	17.3	25.6	5.8	9.9	25.8
	SOMT080308	0.8	16.0	23.8	0.2	3.9	17.3	25.1	5.9	9.8	25.5
	SOMT080312	1.2	16.5	23.8	0.4	3.6	17.3	24.6	6.0	9.6	25.2
WFXC12025E WFXC12025M	SOMT120404	0.4	24.6	38.3	0.1	6.8	27.3	41.2	9.1	16.0	41.3
	SOMT120408	0.8	25.0	38.3	0.2	6.6	27.3	40.6	9.2	15.8	41.0
	SOMT120412	1.2	25.6	38.3	0.4	6.3	27.3	40.1	9.3	15.7	40.7
	SOMT120416	1.6	26.1	38.3	0.5	6.1	27.3	39.5	9.4	15.5	40.4
WFXC12032E WFXC12032M	SOMT120404	0.4	31.6	45.3	0.1	6.8	34.3	48.2	9.1	16.0	48.3
	SOMT120408	0.8	32.0	45.3	0.2	6.6	34.3	47.6	9.2	15.8	48.0
	SOMT120412	1.2	32.6	45.3	0.4	6.3	34.3	47.1	9.3	15.7	47.7
	SOMT120416	1.6	33.1	45.3	0.5	6.1	34.3	46.5	9.4	15.5	47.4

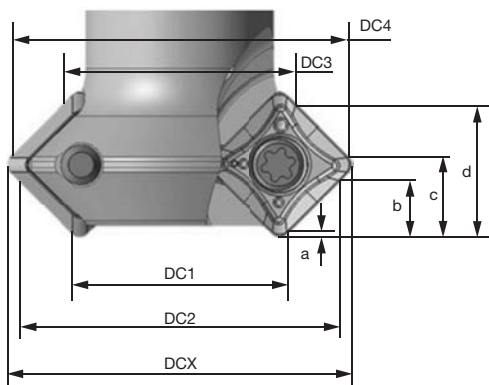

Modular type H273

WFXC 08000E type

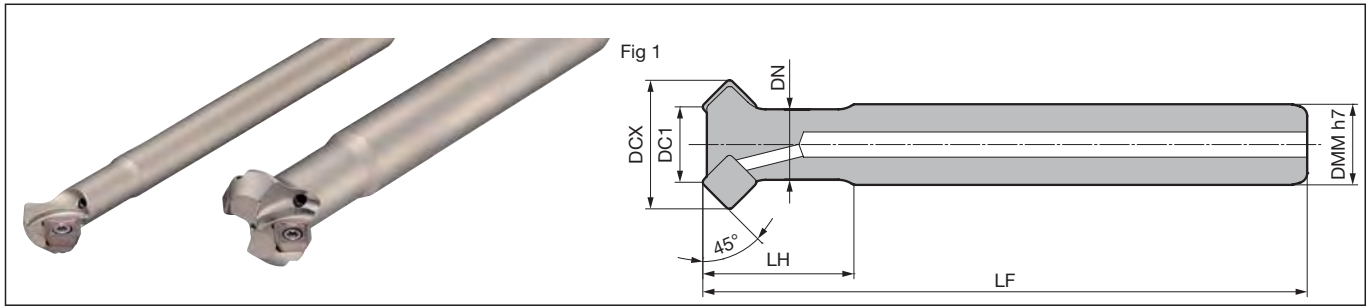

Body (Shank type)


Cat. No.	Stock	Min. Machining Dia.	Max. Dia.	Shank	Head	Overall Length	Number of Teeth	Weight (kg)	Fig
WFXC 08008E	●	DC1	DCX	DMM	LH	LF	1	0.1	1
08016E	●	16	25.5	16	30	120	2	0.2	1

DC1 and DCX values were obtained with a 0.8 corner radius insert mounted.

Insert

Grade Classification	Coated Carbide								Cemented Carbide	DLC	Cermet	Dimensions (mm)						
	High-speed/Light Cutting	Medium Cutting	Roughing	ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A	Corner Radius RE	Fig
Process	High-speed/Light Cutting	Medium Cutting	Roughing	●	●	●	●	●	●	●	●	●	●	●	●	●	0.4	1
	Medium Cutting			●	●	●	●	●	●	●	●	●	●	●	●	●	0.8	1
	Roughing			●	●	●	●	●	●	●	●	●	●	●	●	●	1.2	1
Cat. No.				●	●	●	●	●	●	●	●	●	●	●	●	●	0.4	1
SOMT 080304PZER-L	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.8	1
080308PZER-L	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.4	1
SOMT 080304PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.8	1
080308PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	1.2	1
080312PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.8	1
SOMT 080308PZER-H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	1.2	1
080312PZER-H	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.8	1
SOET 080304PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.8	1
080308PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	1.2	1
080312PZER-G	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	0.2	1
SOET 080302PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	—	0.4	1
080304PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1
080308PZFR-S	—	—	—	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1

Fig 1



Precautions for Use H219

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0306IP	2.0	TRDR08IP SUMI-P

Identification Code

WFXC 08 016 E

Series Code Insert Size Min. Machining type Dia. Shank Dia.

Recommended Cutting Conditions


ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.
P	General Steel	180 to 280 HB	150-200-250	0.05-0.10-0.15
	Mild Steel	≤ 180HB	180-265-350	0.10-0.15-0.20
	Die Steel	200 to 220 HB	100-150-200	0.05-0.10-0.15
M	Stainless Steel	—	150-200-250	0.05-0.10-0.15
K	Cast Iron	250HB	100-175-250	0.05-0.10-0.15
N	Non-Ferrous Metals	—	300-500-1,000	0.10-0.15-0.20
S	Exotic Alloy	—	30-50-80	0.08-0.13-0.18

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

WFXC 12000E type



Rake Angle	Radial	0°
	Axial	0°

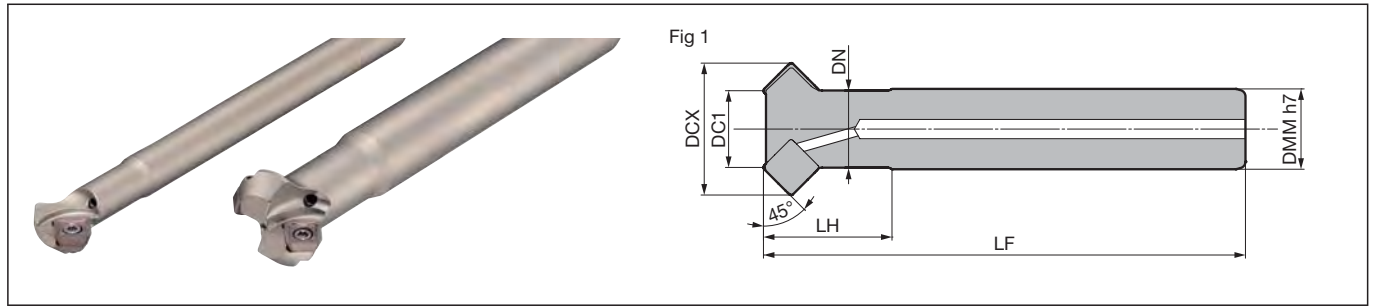

Body (Shank type)


Cat. No.	Stock	Min. Machining Dia. DC1	Max. Dia. DCX	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WFXC 12025E	●	25	41	25	40	150	3	0.6	1
12032E	●	32	48	32	40	150	3	1.0	1

DC1 and DCX values were obtained with a 0.8 corner radius insert mounted.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification		Coated Carbide							Cemented Carbide	DLC	Cermet	Dimensions (mm)				
Process	High-speed/Light Cutting											Corner Radius RE	Fig			
	Medium Cutting															
	Roughing															
Cat. No.		ACU2500	XCU2500	ACP100	ACP200	ACP300	XCK2000	ACK200	ACK300	ACM200	ACM300	H1	DL1000	T4500A		
SOMT 120408PDER-L	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOMT 120404PDER-G	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.4	1
120408PDER-G	●	●	●	●	●	●	●	●	●	●	●	—	—	●	0.8	1
120412PDER-G	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1.2	1
120416PDER-G	●	●	●	●	●	●	●	●	●	●	●	—	—	—	1.6	1
SOMT 120408PDER-H	●	●	●	●	●	●	●	●	●	●	●	—	—	—	0.8	1
SOET 120408PDER-S	—	—	—	—	—	—	—	—	—	—	—	●	●	—	0.8	1

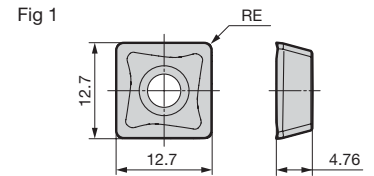

Precautions for Use H219

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX03512IP	3.0	TRDR15IP SUMI-P

Identification Code

WFXC 12 025 E

Series Code Insert Size Min. Machining type Shank Dia.

Recommended Cutting Conditions



ISO	Work Material	Hardness	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)	
			Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.
P	General Steel	180 to 280 HB	150-200-250	0.05-0.10-0.15		
	Mild Steel	≤ 180HB	180-265-350	0.10-0.15-0.20		
	Die Steel	200 to 220 HB	100-150-200	0.05-0.10-0.15		
M	Stainless Steel	—	150-200-250	0.05-0.10-0.15		
K	Cast Iron	250HB	100-175-250	0.05-0.10-0.15		
N	Non-Ferrous Metals	—	300-500-1,000	0.10-0.15-0.20		
S	Exotic Alloy	—	30- 50 -80	0.10-0.15-0.20		

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

SEC-Chamfering Cutter SMC series



Rake	Radial	0°
Angle	Axial	0°

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius


Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

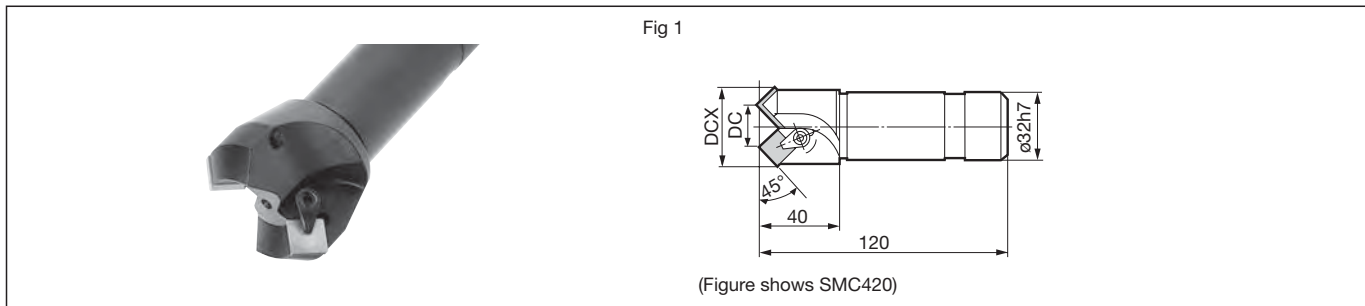

(Figure shows SMC420)

Body

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Number of Teeth	Diameter to be Chamfered	Fig
SMC 407	▲	7	24.3	1	ø11.0 to ø23.8	1
420	▲	20	37.3	2	ø21.2 to ø36.8	1
435	▲	35	52.3	2	ø36.2 to ø51.8	1

Inserts are sold separately.

Insert

Dimensions (mm)

Grade Classification	Coated Carbide		Cemented Carbide			Cermet		Corner Radius RE	Fig
	High-speed/Light Cutting	General-purpose	ST20E	A30	G10E	T1500A	T250A		
Process	K	K	P	P, K	K		P		
Roughing		K							
Cat. No.	ACK200	ACK300	ST20E	A30	G10E	T1500A	T250A	RE	Fig
SPMN 422			●	●	●	●	●	0.8	1
423	●	●						1.2	1
SPG 422			●	●	●	●		0.8	1


Parts

Clamp Plate	Flat Insert Screw		Wrench
		Size	
CCM6BR	WB616	M6 5.0	LH030

Applications

(1) Single Sided	(2) Double Sided	(3) Hole Chamfering	(4) Stepping	(5) Small Plunging, Traverse Cutting

MEMO

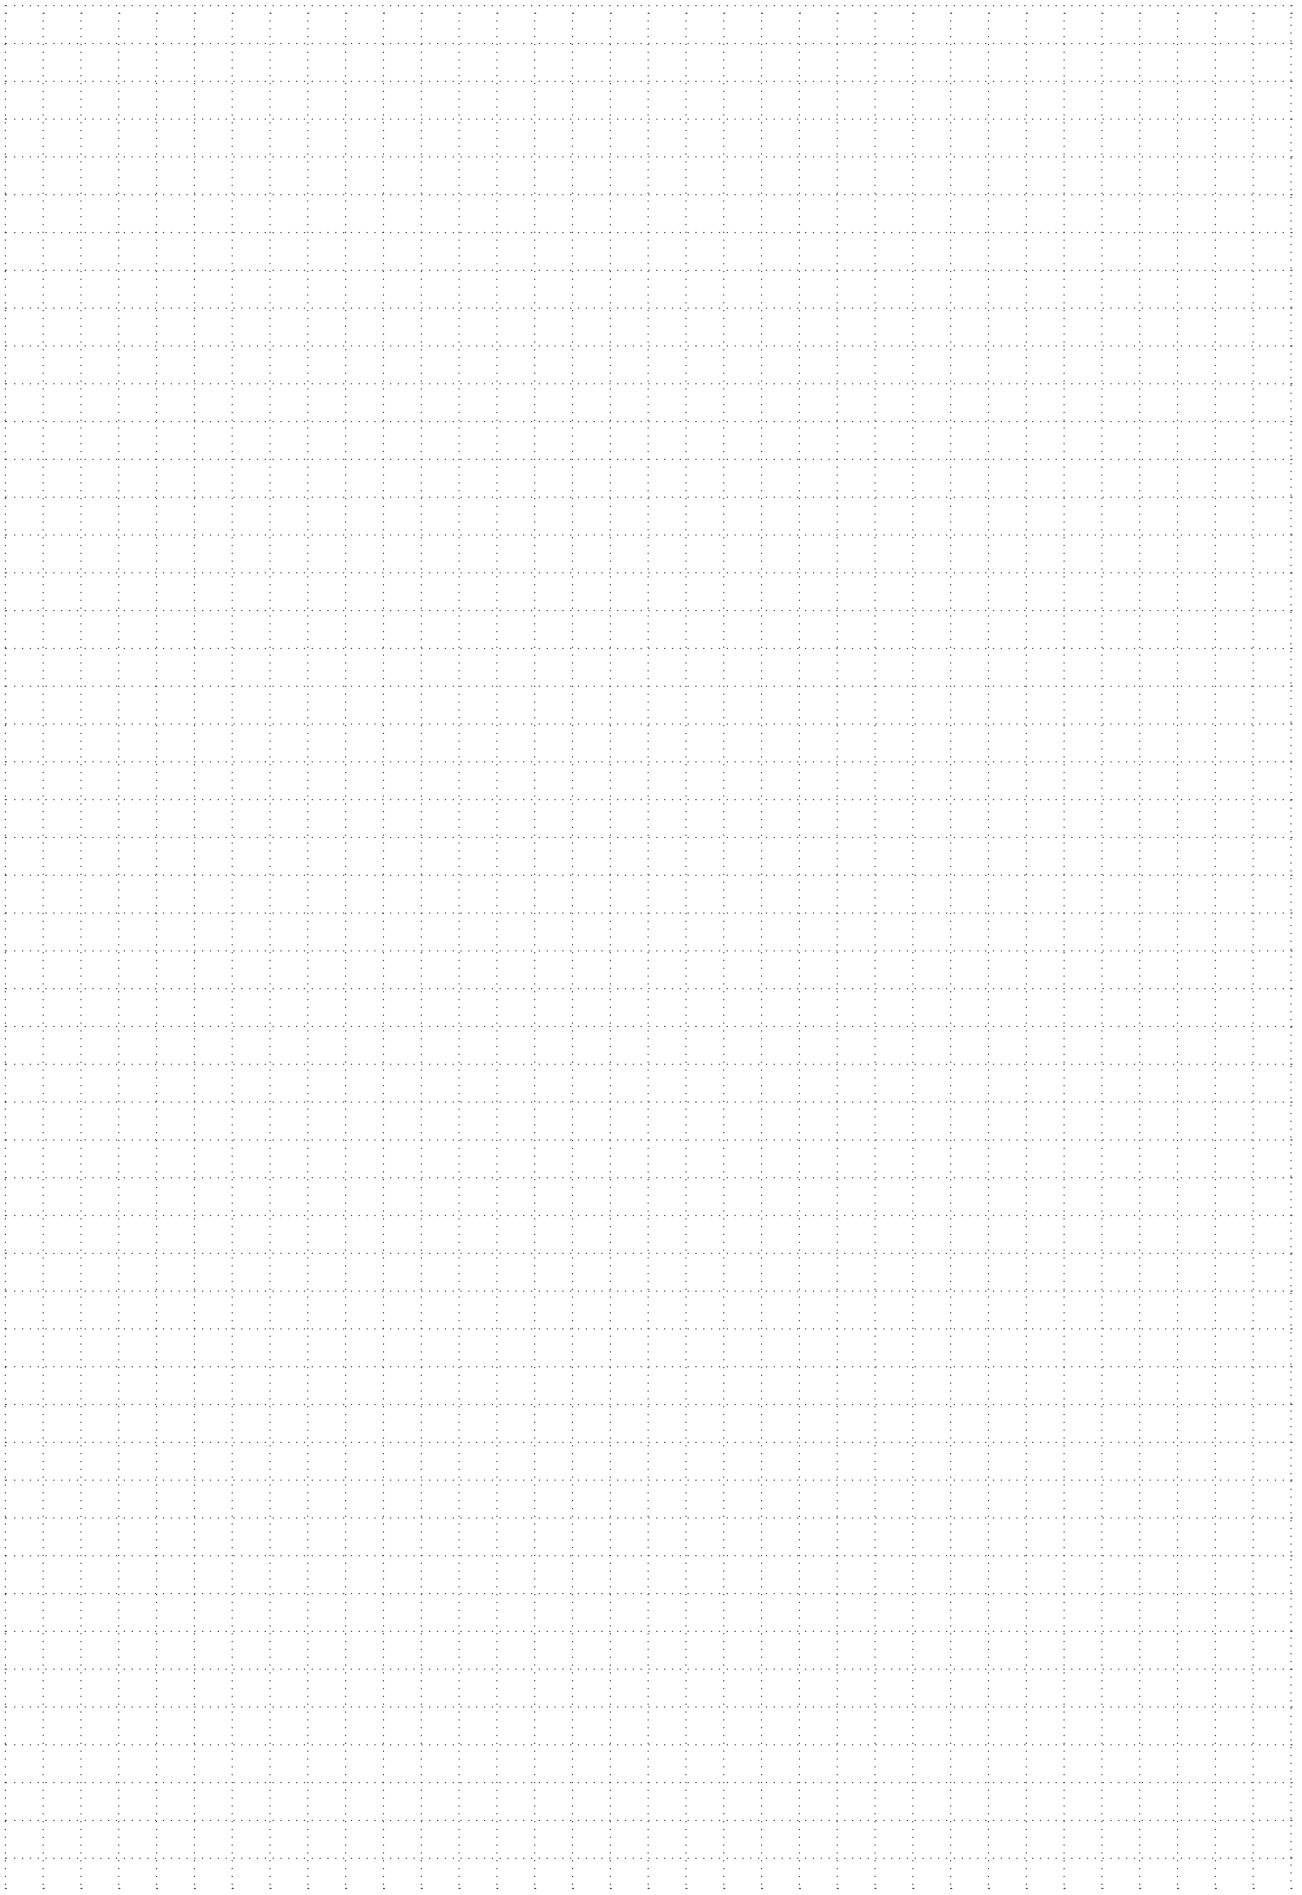



Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



■ Features

- **Drastically Reduced Runout Adjustment Time**
Simple screw-fastening structure enables fine adjustments to be made easily
- **Through-Blade Coolant**
Ensures coolant supply to the cutting edge and breaks chips
- **Lightweight Aluminum Alloy Body (ANXA type)**
Utilises aluminum alloy to achieve a total weight of less than 1.3kg for a ø125mm cutter with 22 teeth
- **Introducing the High-strength CVD Single Crystal Diamond SCV10 Wiper Blade WS type**

■ Product Range

Type	Cat. No.	Body Material	Max. Diameter (mm)																			
			ø25	ø30	ø32	ø40	ø50	ø63	ø80	ø100	ø125	ø160										
Shell	ANXA 16000R Inch	Aluminum Alloy								6	10	14	8	12	18	10	14	22	12	20	28	
	ANXA 16000RS	Aluminum Alloy								6	10	14	8	12	18	10	14	22	12	20	28	
	ANXS 16000R Inch	Steel								6	8	12	6	10	14	8	12	18	10	14	22	
	ANXS 16000RS	Steel				4	6	4	6	9	6	8	12	6	10	14	8	12	18	10	14	22
Shank	ANXS 16000E	Steel	2	3	4	3	4	4	6	4	6	9										
Modular	ANXS 16000M	Steel	2	3	4	3	4	4	6													

Number in ●●● shows the number of teeth Inch Bore


Modular type H274

■ Blade Selection Guide

Work Material	N								
Applications	Finishing/Light Cutting	General-purpose	Roughing		Composite Milling *1	Corner Radius Milling	Corner Radius Milling	Finishing	Burr-free Mirror Finish
Features	Low Cutting Force	Standard	Long Edge	High Strength	High Strength	Corner Radius 0.4	Corner Radius 0.8	Wiper	Wiper
Cutting Edge Shape	L	G	GX	H	GB			W	WS
Edge Length (*2)	6.0mm	6.0mm	9.0mm	6.0mm	6.0mm	6.0mm	6.0mm	2.0mm	1.0mm

*1 Machining of components combining aluminum alloy and cast iron. W type and WS type cannot be used together.



■ Blade Selection Reference

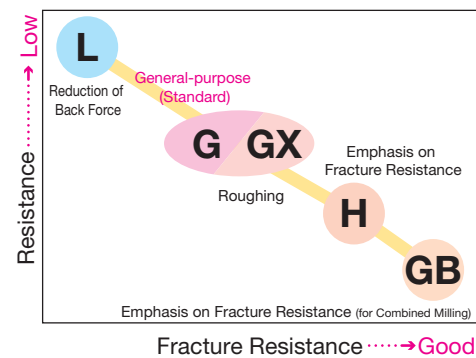

*2 Edge length

● Regrinding possible up to 1.0mm. Reduced running costs

Assuming 0.2mm of regrinding each time, an edge can be used up to 6 times. (Peripheral cutting edge and WS type cannot be reground.)




■ High-speed/High-efficiency Cutting

Realises ultra-high-efficiency machining with $vf = 30,000\text{mm/min}$




Cutter diameter ø100mm comparison

	Spindle Speed min^{-1}	Number of Teeth	Feed Rate $vf(\text{mm/min})$
ALNEX ANX series	18,000	18	32,400
Competitor's Product A	9,500	12	11,400



■ Drastically Reduced Runout Adjustment Time


- Simple screw-fastening structure ● Enables fine adjustments to be made easily ● High-rigidity body (reduces deformation due to tightening)

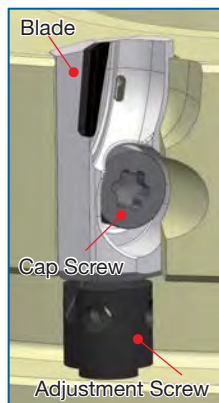

Adjustment is easy thanks to the large movable range of the height adjustment wrench.




We recommend keeping cutting edge height variation during runout adjustment to within 5µm.

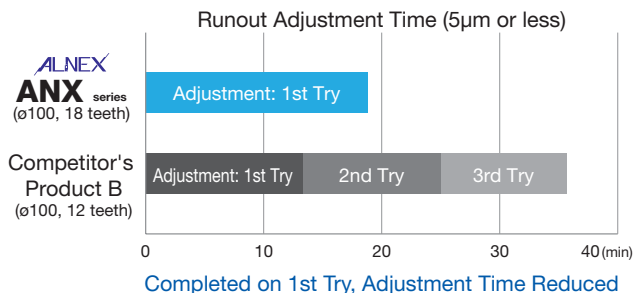

* Because the cutting edge chips off easily, care is required when mounting on the cutter body. Use a non-contact tool presetter.


■ Blade Mounting/Runout Adjustment



(1) Slide the blade into the cutter teeth groove.



(2) Lightly tighten the cap screw while pressing the blade against the restraining face. (1N·m)





(3) Adjust the blade to the required height by using the dedicated wrench to turn the height adjustment screw.




(4) Perform final tightening of the cap screw. (2N·m)

■ Chip Control

Through-Blade Coolant chip breaking

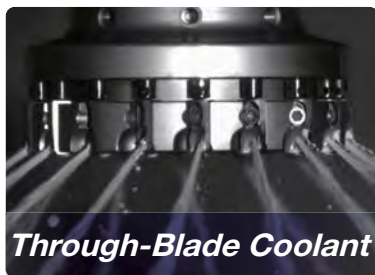

Controls the chips' scatter direction.




The chip pocket catches the chips and suppresses damage to the body.



Work Material: ADC12 Cutting Conditions: $v_c = 2,500\text{m/min}$, $f_z = 0.05\text{mm/t}$, $a_p = 0.5\text{mm}$, Wet




■ Burr Control

Reduces burrs by using a double-chamfered cutting edge (L/G/GX/H/GB type)



Drastically reduces burrs by preventing plastic deformation that causes burrs.

Work Material: A6061 Rolled Steel
Cutting Conditions: $v_c = 3,142\text{m/min}$,
 $f_z = 0.10\text{mm/t}$, $a_p = 0.5\text{mm}$ Dry




ALNEX ANX series

Conventional Tool

New CVD Single Crystal Diamond SCV10 Wiper Blade WS type

- Wiper blade adopts high-strength single-crystal diamond using Sumitomo Electric Hardmetal's vapour phase synthesis technology
- Sharp cutting edge achieves burr-free mirror finish in aluminum alloy machining
- Superior wear resistance maintains cutting edge sharpness for a long time, reducing total tool costs

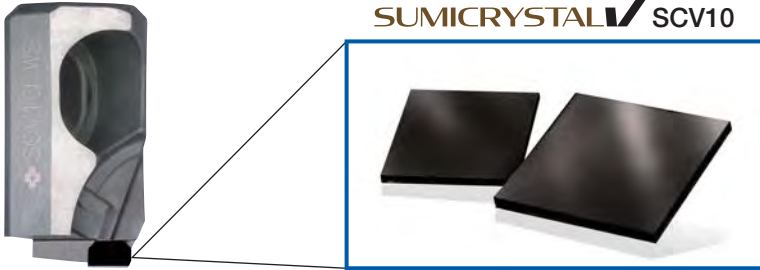

Conventional single-crystal diamond





Superb mirror surface and burr control through sharp cutting edge

Realizes a mirror finish in milling of aluminum alloys, copper alloys, and other non-ferrous metals, with long-term burr control


Mirror Finish (Wiper Blade WS type)

Sharp cutting edge achieves mirror finish with cutting alone

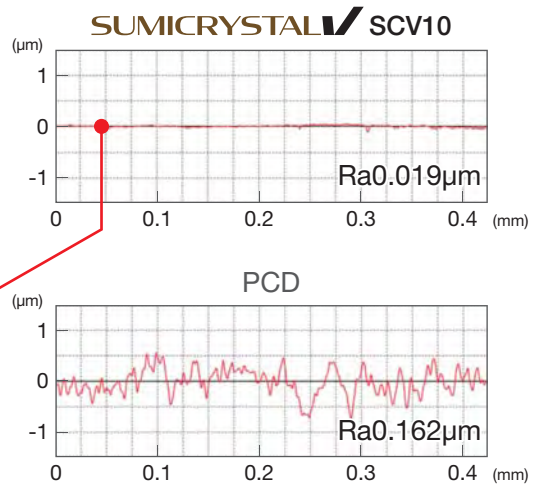
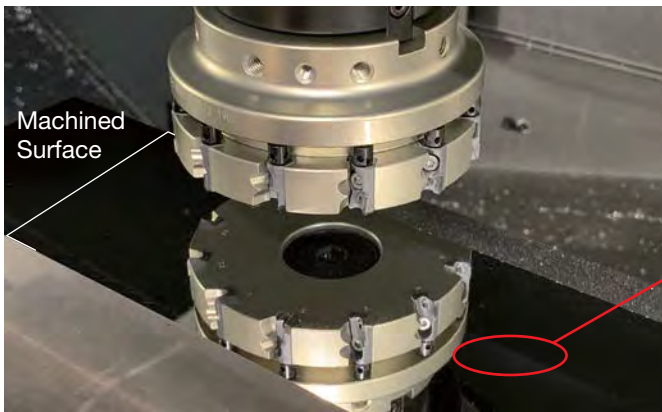


Burr-Free (Wiper Blade WS type)

Sharp cutting edge and excellent wear resistance suppress burrs over a long period

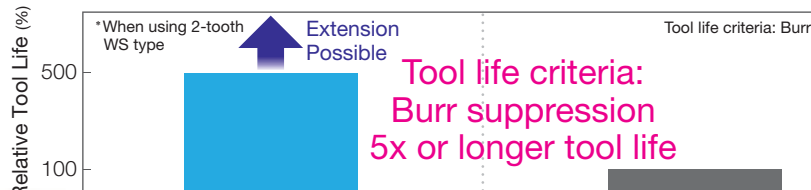

Tool life criteria: Burr
 Tool: ANXS16100R12
 When using 2-tooth wiper blade
 Work Material: A7075
 Cutting Conditions:
 vc = 2,000m/min
 fz = 0.05mm/t
 ap = 0.1mm
 Wet (water soluble)

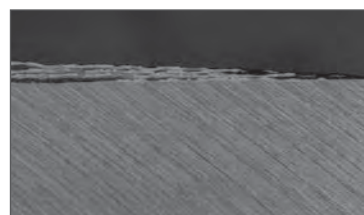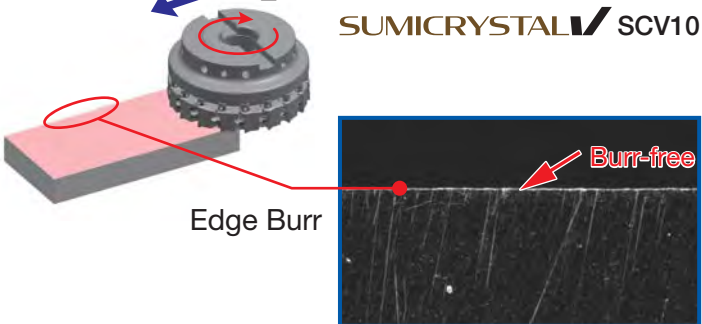

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters


Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

◆ Superior wear resistance maintains cutting edge sharpness for a long time


Wear resistance evaluation in high-silicon aluminum alloy machining

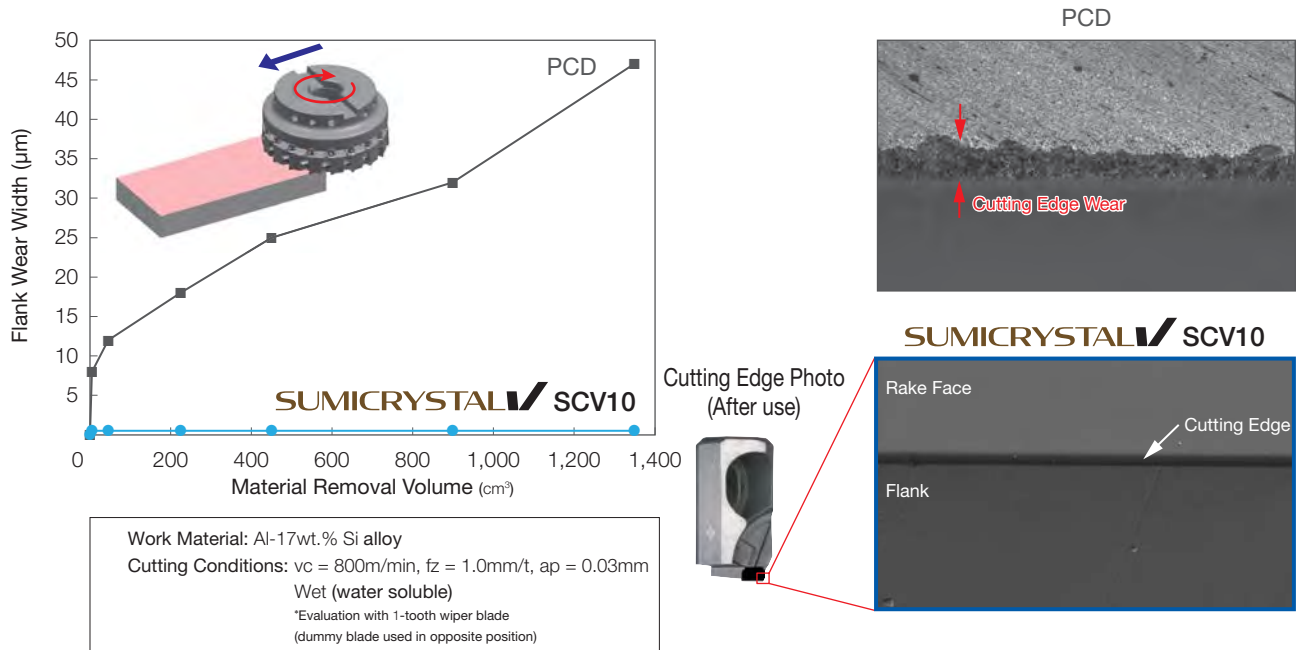

Long-term mirror finish with burrs suppressed and no flank wear progress


◆ Jet-black high-strength single-crystal diamond grade

Fracture resistance evaluation in aluminum alloy-ceramic composite machining

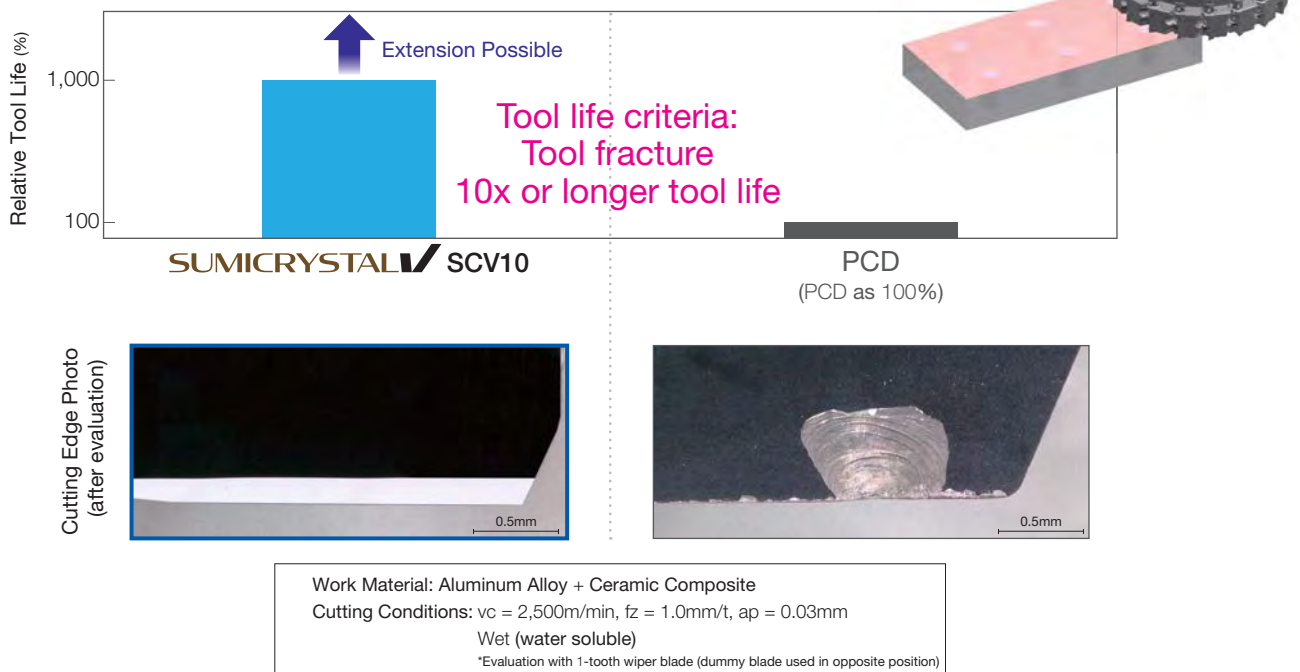

10x or more fracture resistance compared to PCD in finishing at low depth of cut (0.05 mm or less)

ANXA 16000R(S) type

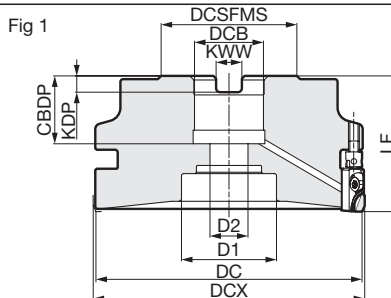

Body (Aluminum Alloy)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss Dia. DCSFMS	Overall Length LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
ANXA 16080RS06	●	80	78	50	50	27	12.4	7	22	35	14	6	0.5	1
16080RS10	●	80	78	50	50	27	12.4	7	22	35	14	10	0.5	1
16080RS14	●	80	78	50	50	27	12.4	7	22	35	14	14	0.5	1
16100RS08	●	100	98	50	50	27	12.4	7	22	35	14	8	0.8	1
16100RS12	●	100	98	50	50	27	12.4	7	22	35	14	12	0.8	1
16100RS18	●	100	98	50	50	27	12.4	7	22	35	14	18	0.8	1
16125RS10	●	125	123	50	50	27	12.4	7	22	35	14	10	1.2	1
16125RS14	●	125	123	50	50	27	12.4	7	22	35	14	14	1.2	1
16125RS22	●	125	123	50	50	27	12.4	7	22	35	14	22	1.3	1
16160RS12	●	160	158	80	63	40	16.4	9	29	52	29	12	2.6	1
16160RS20	●	160	158	80	63	40	16.4	9	29	52	29	20	2.6	1
16160RS28	●	160	158	80	63	40	16.4	9	29	52	29	28	2.6	1
ANXA 16080R06	●	80	78	50	50	25.4	9.5	6	25	35	14	6	0.5	1
16080R10	●	80	78	50	50	25.4	9.5	6	25	35	14	10	0.5	1
16080R14	●	80	78	50	50	25.4	9.5	6	25	35	14	14	0.5	1
16100R08	●	100	98	50	50	25.4	9.5	6	25	35	14	8	0.8	1
16100R12	●	100	98	50	50	25.4	9.5	6	25	35	14	12	0.9	1
16100R18	●	100	98	50	50	25.4	9.5	6	25	35	14	18	0.9	1
16125R10	●	125	123	50	50	25.4	9.5	6	25	35	14	10	1.2	1
16125R14	●	125	123	50	50	25.4	9.5	6	25	35	14	14	1.2	1
16125R22	●	125	123	50	50	25.4	9.5	6	25	35	14	22	1.3	1
16160R12	●	160	158	80	63	38.1	15.9	10	35.5	55	30	12	2.3	1
16160R20	●	160	158	80	63	38.1	15.9	10	35.5	55	30	20	2.4	1
16160R28	●	160	158	80	63	38.1	15.9	10	35.5	55	30	28	2.6	1

Blades are sold separately.

If using blades with corner radius (ANB1604R/ANB1608R), DC = DCX.

Weight indicated includes the weight with blades and other spare parts (excluding the centre bolt).

All aluminum alloy cutter bodies from (DCX) ø80 to ø125 have similar bore diameter (DCB) (metric ø27/inch ø25.4).


Note: The values in red have been changed from Rev. 3 and the 2021-2022 General Catalogue.

Identification Code



Precautions when Using Wiper Blades


· W type Setting



Precautions

In order to maintain cutter balance when using the W type wiper blade, use a cutter with an even-number of cutting teeth and place another W type wiper blade at the opposite teeth position.

· WS type Setting



Precautions

(For more details, refer to the instruction manual included with the product)

In order to maintain cutter balance when using the WS type (SCV10 wiper blade), use a cutter with an even-number of cutting teeth and place another WS type wiper blade (or dummy blade ANBD) at opposite teeth positions.


*The dummy blade is dedicated for use with WS type.



Blade

Dimensions (mm)

Grade Classification	SUMIDIA		SUMICRYSTAL V	Cutting Edge Length	Corner Radius RE	Wiper Edge Shape	Applications	Fig
	High-speed/Light Cutting	General-purpose	Roughing					
Process	N	K	N					
	N	K						
	N	K						
Cat. No.	DA1000	DA90	SCV10					
ANB 1600R-L	●		—	6.0	—	Linear	Low Cutting Force	1
ANB 1600R-G	●		—	6.0	—	Arc-Shaped	General-purpose	1
ANB 1600R-GB		●	—	6.0	—	Arc-Shaped	Composite Milling	1
ANB 1600R-H	●	—	—	6.0	—	Arc-Shaped	Strong Edge	1
ANB 1600R-GX	●	—	—	9.0	—	Arc-Shaped	Long Edge	2
ANB 1604R	●	—	—	6.0	0.4	Linear	Corner Radius	3
ANB 1608R	●	—	—	6.0	0.8	Linear	Corner Radius	3
ANB 1600R-W	●	—	—	—	—	Arc-Shaped	Wiper	4
ANB 1600R-WS	—	—	●	—	—	Arc-Shaped	Wiper	5
ANBD	—	—	● ^{*2}	—	—	—	Dummy Blade	6

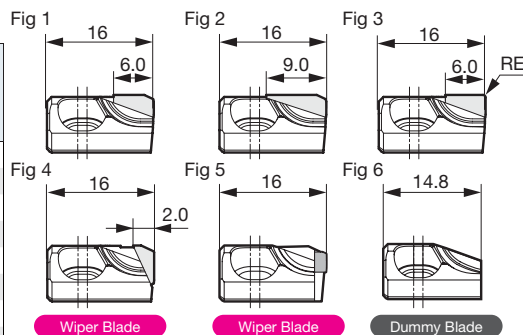

*1 Cast iron/aluminum alloy *2 Dummy blade for use with WS type (cemented carbide), refer to H228 "Precautions when Using Wiper Blades" (Mounting Precautions).

Recommended Cutting Conditions

Si content of 12.6% or less

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	—	2,000 - 2,500 - 3,000	0.05 - 0.13 - 0.20	DA1000 SCV10

Si content of over 12.6%

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	—	400 - 600 - 800	0.05 - 0.13 - 0.20	DA1000 DA90 SCV10

Combined Milling of Cast Iron/Aluminum Alloy

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
K	Cast Iron/	—	300 - 400 - 500	0.05 - 0.13 - 0.20	DA90
N	Aluminum Alloy	—			

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors. For combined milling of cast iron/aluminum alloy, we recommend DA90. When using wiper blade WS type, see the table below.

Parts

Applicable Cutter	Cap Screw		Wrench	Adjustment Screw	Adjustment Wrench	Centre Bolt	
ANXA 16080R(S)○○							
ANXA 16100R(S)○○							
ANXA 16125R(S)○○	BXA0310IP	2.0	TRXW10IP	HFJ	ANT	BXH1235-D33	50
ANXA 16160R(S)○○						BXH2036-D50	200

The adjustment wrench (ANT) can also be used for height adjustment of the High-speed Cutter RF type and High-efficiency Cutter HF type.

Wiper Blade WS type Recommended Feed Rate

WS Cutting Edge Feed Rate per Tooth ^{*1} fz _{ws} (mm/t _{ws})	D ≤ 0.5	0.5 < D ≤ 1.7	1.7 < D
Burr-free Finish	◎ Excellent		Impossible
Mirror Finishing	◎ Excellent	○ Good	
Target Surface Roughness Ra (μm)	0.015 to 0.05		

*1 Feed Rate per WS Cutting Edge Tooth fz_{ws} Feed Rate per Tooth fz

$$fz_{ws} \text{ (mm/t}_{ws}\text{)} = \frac{fz \times (\text{Total No. of Teeth})^2}{(\text{WS type No. of Teeth})^3}$$

$$fz \text{ (mm/t)} = \frac{\text{Feed Rate (vf) (mm/min)}}{\text{Spindle Speed n (min}^{-1}\text{)} \times (\text{Total No. of Teeth})}$$

*2 Total number of teeth includes dummy blade and wiper blade (WS type).


*3 WS type number of teeth does not include dummy blade.

Maximum Allowable Spindle Speed

Cat. No.	n max(min ⁻¹)
ANXA 16080RS06	20,000
16080RS10	20,000
16080RS14	20,000
16100RS08	18,000
16100RS12	18,000
16100RS18	18,000
16125RS10	16,000
16125RS14	16,000
16125RS22	16,000
16160RS12	14,000
16160RS20	14,000
16160RS28	14,000
ANXA 16080R06	20,000
16080R10	20,000
16080R14	20,000
16100R08	18,000
16100R12	18,000
16100R18	18,000
16125R10	16,000
16125R14	16,000
16125R22	16,000
16160R12	14,000
16160R20	14,000
16160R28	14,000

*The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force.

ANXS 16000R(S) type

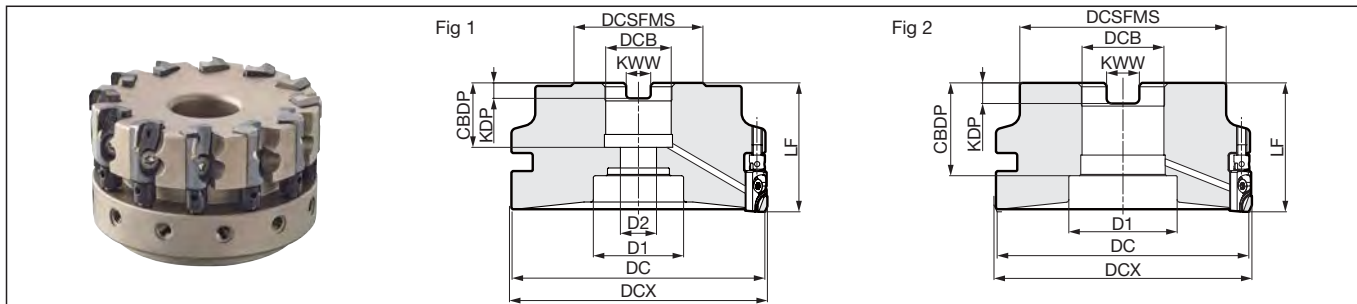

Body (Steel)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Boss Dia. DCSFMS	Overall Length LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
ANXS 16040RS04	●	40	38	38.5	40	16	8.4	5.6	18	14	9	4	0.3	1
16040RS06	●	40	38	38.5	40	16	8.4	5.6	18	14	9	6	0.3	1
16050RS04	●	50	48	48.5	40	22	10.4	6.3	20	18	11	4	0.4	1
16050RS06	●	50	48	48.5	40	22	10.4	6.3	20	18	11	6	0.4	1
16050RS09	●	50	48	48.5	40	22	10.4	6.3	20	18	11	9	0.4	1
16063RS06	●	63	61	50	40	22	10.4	6.3	20	18	11	6	0.7	1
16063RS08	●	63	61	50	40	22	10.4	6.3	20	18	11	8	0.7	1
16063RS12	●	63	61	50	40	22	10.4	6.3	20	18	11	12	0.7	1
16080RS06	●	80	78	50	50	27	12.4	7	22	35	14	6	1.2	1
16080RS10	●	80	78	50	50	27	12.4	7	22	35	14	10	1.2	1
16080RS14	●	80	78	50	50	27	12.4	7	22	35	14	14	1.2	1
16100RS08	●	100	98	80	50	32	14.4	8	32	46	—	8	1.9	2
16100RS12	●	100	98	80	50	32	14.4	8	32	46	—	12	2.0	2
16100RS18	●	100	98	80	50	32	14.4	8	32	46	—	18	2.0	2
16125RS10	●	125	123	80	63	40	16.4	9	29	52	29	10	3.8	1
16125RS14	●	125	123	80	63	40	16.4	9	29	52	29	14	3.9	1
16125RS22	●	125	123	80	63	40	16.4	9	29	52	29	22	3.9	1
ANXS 16063R06	●	63	61	50	50	25.4	9.5	6	25	20	14	6	0.9	1
16063R08	●	63	61	50	50	25.4	9.5	6	25	20	14	8	0.9	1
16063R12	●	63	61	50	50	25.4	9.5	6	25	20	14	12	0.9	1
16080R06	●	80	78	50	50	25.4	9.5	6	25	35	14	6	1.2	1
16080R10	●	80	78	50	50	25.4	9.5	6	25	35	14	10	1.2	1
16080R14	●	80	78	50	50	25.4	9.5	6	25	35	14	14	1.2	1
16100R08	●	100	98	80	50	31.75	12.7	8	36	42	—	8	1.9	2
16100R12	●	100	98	80	50	31.75	12.7	8	36	42	—	12	2.0	2
16100R18	●	100	98	80	50	31.75	12.7	8	36	42	—	18	2.0	2
16125R10	●	125	123	80	63	38.1	15.9	10	35.5	52	29	10	3.9	1
16125R14	●	125	123	80	63	38.1	15.9	10	35.5	52	29	14	3.9	1
16125R22	●	125	123	80	63	38.1	15.9	10	35.5	52	29	22	3.9	1

Blades are sold separately.
 If using blades with corner radius (ANB1604R/ANB1608R), DC = DCX.
 Weight indicated includes the weight with blades and other spare parts (excluding the centre bolt).
 Note: The values in red have been changed from Rev. 3 and the 2021-2022 General Catalogue.

Identification Code

ANX S 16 100 R S 18

Series Code Steel Body Blade Max. Dia. Feed Metric Number Direction Bore of Teeth

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals


Cast Iron, High-Speed



Blade

Dimensions (mm)

Grade Classification	SUMIDIA		SUMICRYSTAL V	Cutting Edge Length	Corner Radius RE	Wiper Edge Shape	Applications	Fig
	High-speed/Light Cutting	General-purpose	Roughing					
Process	N	K	N					
	N	K						
	N	K						
Cat. No.	DA1000	DA90	SCV10					
ANB 1600R-L	●		—	6.0	—	Linear	Low Cutting Force	1
ANB 1600R-G	●		—	6.0	—	Arc-Shaped	General-purpose	1
ANB 1600R-GB		●	—	6.0	—	Arc-Shaped	Composite Milling	1
ANB 1600R-H	●	—	—	6.0	—	Arc-Shaped	Strong Edge	1
ANB 1600R-GX	●	—	—	9.0	—	Arc-Shaped	Long Edge	2
ANB 1604R	●	—	—	6.0	0.4	Linear	Corner Radius	3
ANB 1608R	●	—	—	6.0	0.8	Linear	Corner Radius	3
ANB 1600R-W	●	—	—	—	—	Arc-Shaped	Wiper	4
ANB 1600R-WS	—	—	●	—	—	Arc-Shaped	Wiper	5
ANBD	—	—	●	—	—	—	Dummy Blade	6

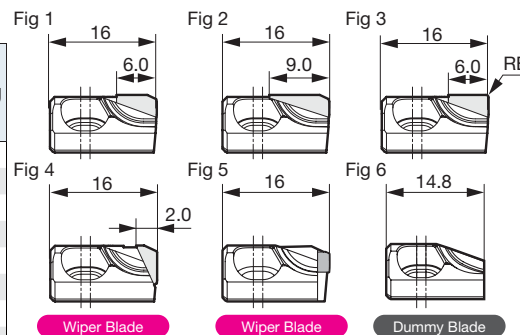

*1 Cast iron/aluminum alloy *2 Dummy blade for use with WS type (cemented carbide), refer to H228 "Precautions when Using Wiper Blades" (Mounting Precautions).

Recommended Cutting Conditions

Si content of 12.6% or less

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	—	2,000 - 2,500 - 3,000	0.05 - 0.13 - 0.20	DA1000 DA90 SCV10

Si content of over 12.6%

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	—	400 - 600 - 800	0.05 - 0.13 - 0.20	DA1000 DA90 SCV10

Combined Milling of Cast Iron/Aluminum Alloy

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
K	Cast Iron/ Aluminum Alloy	—	300 - 400 - 500	0.05 - 0.13 - 0.20	DA90
N					

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors. For combined milling of cast iron/aluminum alloy, we recommend DA90. When using wiper blade WS type, refer to page H229.

Parts

Applicable Cutter	Cap Screw	Wrench	Adjustment Screw	Adjustment Wrench	Centre Bolt	
ANXS 16040RS00					BXH0825-D13	15
ANXS 16050RS00					BXH1030-D16	25
ANXS 16063RS00	BXA0310IP	2.0	TRXW10IP	HFJ	ANT	
ANXS 16080RS00					BXH1235-D33	50
ANXS 16100RS00					BXH1635-D40	100
ANXS 16125RS00					BXH2036-D50	200
ANXS 16063R00					BXH1235-D18	40
ANXS 16080R00	BXA0310IP	2.0	TRXW10IP	HFJ	ANT	
ANXS 16100R00					BXH1235-D33	50
ANXS 16125R00					BXH1635-D40	100
					BXH2036-D50	200

The adjustment wrench (ANT) can also be used for height adjustment of the High-speed Cutter RF type and High-efficiency Cutter HF type.

Maximum Allowable Spindle Speed

Cat. No.	n max(min ⁻¹)
ANXS 16040RS04	25,000
16040RS06	25,000
16050RS04	25,000
16050RS06	25,000
16050RS09	25,000
16063RS06	22,000
16063RS08	22,000
16063RS12	22,000
16080RS06	20,000
16080RS10	20,000
16080RS14	20,000
16100RS08	18,000
16100RS12	18,000
16100RS18	18,000
16125RS10	16,000
16125RS14	16,000
16125RS22	16,000
ANXS 16063R06	22,000
16063R08	22,000
16063R12	22,000
16080R06	20,000
16080R10	20,000
16080R14	20,000
16100R08	18,000
16100R12	18,000
16100R18	18,000
16125R10	16,000
16125R14	16,000
16125R22	16,000

*The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force.

Milling Cutters
Face Milling
Shoulder Milling
High-Feed
Multi-purpose
Radius
Radial/3D Profiling
Side Cutters
T-Slot Cutters
Chamfering
Non-Ferrous Metals
Cast Iron, High-Speed

Rake Angle	Radial	-2° to 0°
	Axial	+5°

3mm 90°




Face Milling

Shoulder Milling

Groove Milling



Fig 1

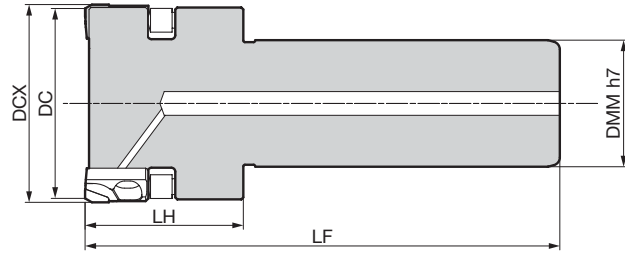

Body (Steel)

Dimensions (mm)

Cat. No.	Stock	Max. Dia. DCX	Dia. DC	Shank Dia. DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
ANXS 16025E02	●	25	23	20	35	95	2	0.2	1
16030E03	●	30	28	20	35	95	3	0.3	1
16030E04	●	30	28	20	35	95	4	0.3	1
16032E03	●	32	30	20	35	95	3	0.3	1
16032E04	●	32	30	20	35	95	4	0.3	1
16040E04	●	40	38	20	40	100	4	0.4	1
16040E06	●	40	38	20	40	100	6	0.5	1
16050E04	●	50	48	32	40	120	4	1.0	1
16050E06	●	50	48	32	40	120	6	1.0	1
16050E09	●	50	48	32	40	120	9	1.0	1

Blades are sold separately.

If using blades with corner radius (ANB1604R/ANB1608R), DC = DCX.

Weight indicated includes the weight with blades and other spare parts.

Identification Code

ANX **S** **16** **032** **E** **04**


Series Code Steel Body Blade Size Max. Dia. Shank type Number of Teeth



Blade

Dimensions (mm)

Grade Classification	SUMIDIA		SUMICRYSTAL V	Cutting Edge Length	Corner Radius RE	Wiper Edge Shape	Applications	Fig
	High-speed/Light Cutting	General-purpose	Roughing					
Process	N	K/N	N					
	N	K/N						
	N	K/N						
Cat. No.	DA1000	DA90	SCV10					
ANB 1600R-L	●		—	6.0	—	Linear	Low Cutting Force	1
ANB 1600R-G	●		—	6.0	—	Arc-Shaped	General-purpose	1
ANB 1600R-GB		●	—	6.0	—	Arc-Shaped	Composite Milling	1
ANB 1600R-H	●	—	—	6.0	—	Arc-Shaped	Strong Edge	1
ANB 1600R-GX	●	—	—	9.0	—	Arc-Shaped	Long Edge	2
ANB 1604R	●	—	—	6.0	0.4	Linear	Corner Radius	3
ANB 1608R	●	—	—	6.0	0.8	Linear	Corner Radius	3
ANB 1600R-W	●	—	—	—	—	Arc-Shaped	Wiper	4
ANB 1600R-WS	—	—	●	—	—	Arc-Shaped	Wiper	5
ANBD	—	—	● ^{*2}	—	—	—	Dummy Blade	6

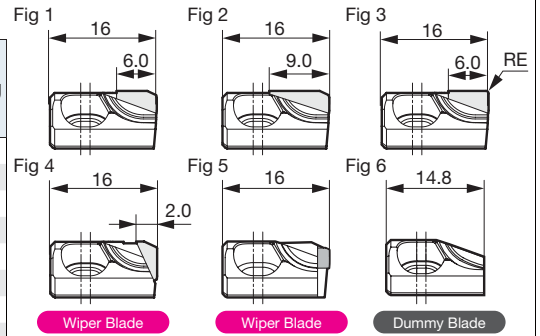

*1 Cast iron/aluminum alloy *2 Dummy blade for use with WS type (cemented carbide), refer to H228 "Precautions when Using Wiper Blades" (Mounting Precautions).

Recommended Cutting Conditions

Si content of 12.6% or less

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	—	2,000 - 2,500 - 3,000	0.05 - 0.13 - 0.20	DA1000 SCV10

Si content of over 12.6%

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	—	400 - 600 - 800	0.05 - 0.13 - 0.20	DA1000 DA90 SCV10

Combined Milling of Cast Iron/Aluminum Alloy

ISO	Work Material	Hardness	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
K	Cast Iron/ Aluminum Alloy	—	300 - 400 - 500	0.05 - 0.13 - 0.20	DA90
N					

- Note**
- The above are the recommended conditions for ANX series overall. Use within the maximum allowable spindle speed.
 - The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
 - For combined milling of cast iron/aluminum alloy, we recommend DA90.
 - When using wiper blade WS type, refer to page H229.

Parts

Cap Screw	Wrench	Adjustment Screw	Adjustment Wrench
BXA0310IP	2.0 TRXW10IP	HFJ	ANT

The adjustment wrench (ANT) can also be used for height adjustment of the High-speed Cutter RF type and High-efficiency Cutter HF type.

Maximum Allowable Spindle Speed

Cat. No.	n max(min ⁻¹)
ANXS 16025E02	10,000
16030E03	10,000
16030E04	10,000
16032E03	10,000
16032E04	10,000
16040E04	10,000
16040E06	10,000
16050E04	10,000
16050E06	10,000
16050E09	10,000

*The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force.



Milling Cutters



■ Features

The HF type high-efficiency aluminum alloy cutter employs a unique blade design to achieve machining without burrs.

HFFH type with coolant holes is now available as a BBT30 (BIG-PLUS™) arbor integrated version.

Work Material

- Aluminum and aluminum alloys
 - Other non-ferrous metals
- (Not suited for cast iron or steel.)

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters


Chamfering

Non-Ferrous Metals


Cast Iron, High-Speed



High-feed, High-efficiency Milling with Multi-blade Design



Workpiece: Aluminum Case (Frame Milling)
Tool: **HFF12080R-25.4** (ø80 10-tooth),
Conventional Tool (ø80 6-tooth)

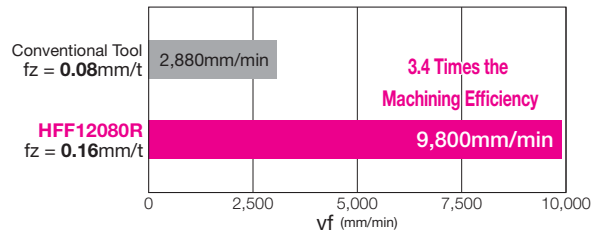

■ Maximum Allowable Spindle Speed and Feed Rate


Cutter Dia. (mm)	n _{max} (min ⁻¹)	vc (m/min)	fz (mm/t)	Max. No. of Teeth (pcs.)	vf (mm/min)
ø80	11,000	2,763	up to 0.2	10	up to 22,000
ø100	9,500	2,983	up to 0.2	12	up to 22,800
ø125	7,500	2,944	up to 0.2	15	up to 22,500

* The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force.


● Reduces burrs by using a double-chamfered blade type

Drastically reduces burrs by preventing plastic deformation that causes burrs.

Work Material: **A6061** Rolled Steel
Cutting Conditions: vc = **3,142**m/min,
fz = **0.10**mm/t,
ap = **0.5**mm, Dry

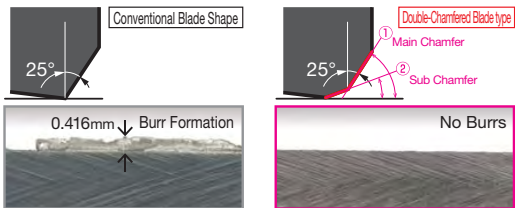

● Wedge clamp with anti-fly-out mechanism ensures safety and operability


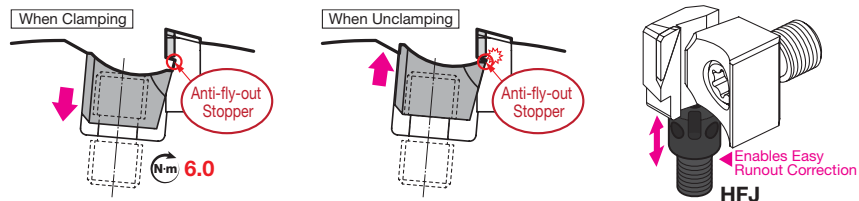


Ensure that the maximum allowable spindle speed (n_{max}) specified for each cutter diameter is not exceeded. (See the table at upper right)

● Reduces running costs by drastically increasing blade regrinding allowance (to 1.8mm)

Assuming 0.2mm of regrinding each time, an edge can be used up to 10 times.

(Given conditions of normal wear with ap = 1.4mm or less)

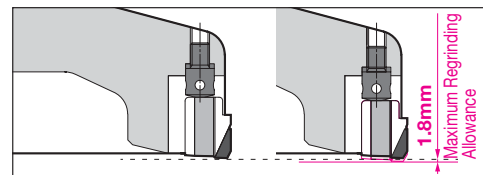

The regrinding allowance has been drastically increased compared to conventional screw-lock types.

● Internal coolant improves chip evacuation performance (HFFH type, HFFH-BBT30 type)

The internal coolant effectively prevents chips from becoming clogged or biting into the work material and achieves longer tool life. (Use an internal coolant compatible arbor)



*1: BIG-PLUS™ is a registered trademark of BIG DAISHOWA Co., Ltd.
*2: Can also be used with BT30 spindle machines.

HF series

Product Range



Type	Cat. No.	Dia. (mm)		
		ø80	ø100	ø125
Shell	HFM 12000RS	6*	8	10*
	HFM 12000R	6	8*	10*
	HFF 12000RS	10*	12	15*
	HFF 12000R	10	12*	15*
	HFFH 12000RS	10*	12	15*
	HFFH 12000R	10	12*	15*
	HFFH 12000R-BBT30	10	12	15

Number in ● shows the number of teeth Inch Bore *mark: Different diameter shanks in stock


Blade Selection Guide

Work Material	N				
Applications	Reduction of Back Force	General-purpose	Roughing	Emphasis on Fracture Resistance	Finishing
Features	Low Cutting Force	Standard	Long Edge	High Strength	Wiper
Type	L type	G type	GX type	H type	W type
Cutting Edge Shape					
Edge Length (mm)	6.0mm	6.0mm	9.0mm	6.0mm	2.0mm

Blade Selection Reference

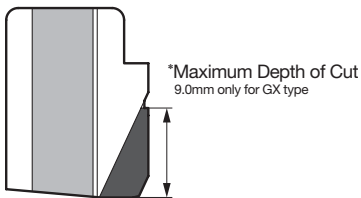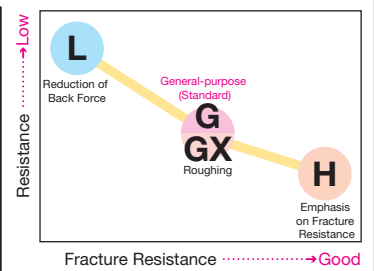


Wiper Blade Step Amount

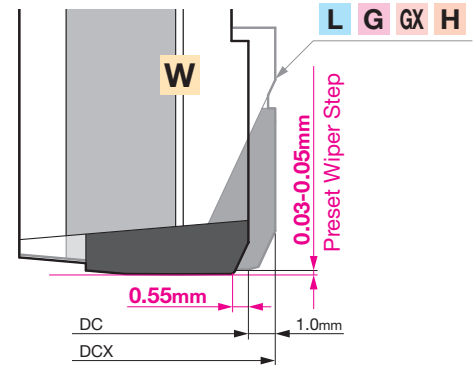

Structure of HF type


The axial set screw and balance adjustment screw hole have an embedded special part that prevents the insertion of screwdrivers or hex wrenches.

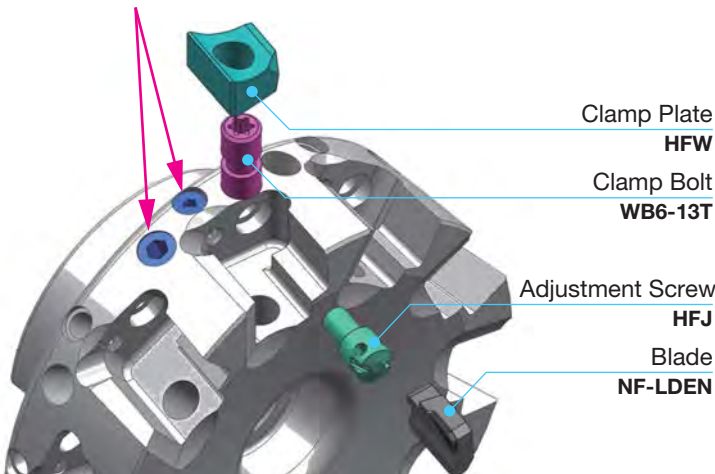

Blade Mounting Direction

Loosen the screw by one turn before removing the blade.

Note that if the insert is forcibly removed in the wrong direction, the part may break.

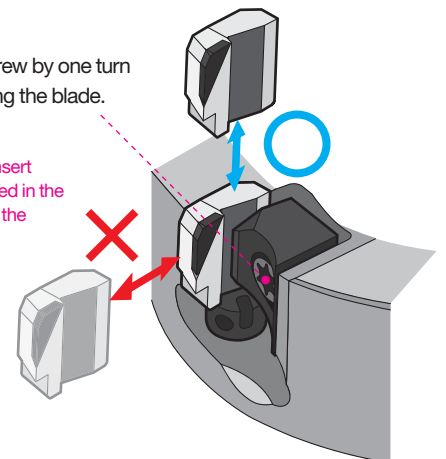


HFM 12000RS/R type



Rake Angle	Radial	4°
	Axial	10°

3mm	90°
-----	-----

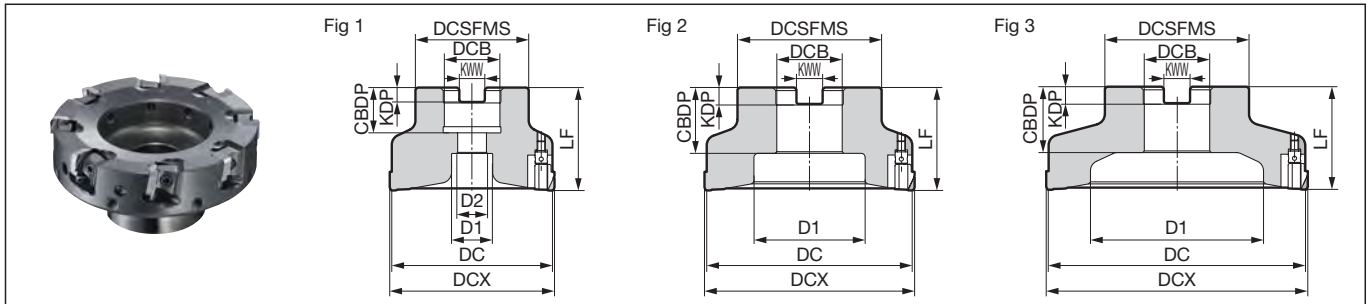

Body (Fine Pitch: 2-teeth/Inch)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Overall Length LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
HFM 12080RS-22	●	80	82	50	40	22	10.4	6.3	20	18	11	6	1.0	1
12080RS-27	●	80	82	55	50	27	12.4	7	22	20	14	6	1.2	1
12100RS-32	●	100	102	70	50	32	14.4	8	32	54	—	8	1.7	2
12125RS-32	●	125	127	70	50	32	14.4	8	32	84	—	10	2.2	3
12125RS-40	●	125	127	90	63	40	16.4	9	35	84	—	10	2.8	3
HFM 12080R-25.4	●	80	82	50	50	25.4	9.5	6	30	35	—	6	1.0	2
12100R-25.4	●	100	102	50	50	25.4	9.5	6	30	54	—	8	1.5	2
12100R-31.75	●	100	102	70	50	31.75	12.7	8	32	54	—	8	1.7	2
12125R-25.4	●	125	127	50	50	25.4	9.5	6	30	84	—	10	2.0	3
12125R-31.75	●	125	127	70	50	31.75	12.7	8	32	84	—	10	2.2	3
12125R-38.1	●	125	127	80	63	38.1	15.9	10	36	84	—	10	2.5	3

Blades are sold separately.

Blade

Dimensions (mm)

Grade Classification		SUMIDIA
Process	High-speed/Light Cutting	
	General-purpose	
	Roughing	

Cat. No.	DA1000	Cutting Edge Length	Wiper Edge Shape	Applications	Fig
NF-LDEN 12T3ZDFR-L	●	6.0	Linear	Low Cutting Force	1
12T3ZDFR-G	●	6.0	Arc-Shaped	General-purpose	1
12T3ZDTR-H	●	6.0	Arc-Shaped	Strong Edge	1
12T3ZDFR-GX	●	9.0	Arc-Shaped	Long Edge	2
12T3ZDFR-W	●	2.0	Arc-Shaped	Wiper	3

Parts

(Sold Separately)

Clamp Plate	Bolt	Adjustment Screw	Wrench	Wrench	Assembly Wrench
HFV	WB6-13T	6.0	HFJ	TTX20	RFT
					HFVT

Identification Code

HF M 12 080 R S - 22

Series Code Fine Pitch Blade Size Dia. Feed Direction Metric Bore Hole Dia.

Recommended Cutting Conditions

Si content of 12.6% or less

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
	Aluminum Alloy	2,000-2,500-3,000	0.05-0.13-0.20	DA1000

Note · The cutting conditions are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
· The above are the recommended conditions for HF type overall. Use within the maximum allowable spindle speed.

Si content of over 12.6%

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
	Aluminum Alloy	400-600-800	0.05-0.13-0.20	DA1000

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


HFF 12000RS/R type



Rake Angle	Radial	4°
	Axial	10°

3mm	90°
-----	-----

Face Milling

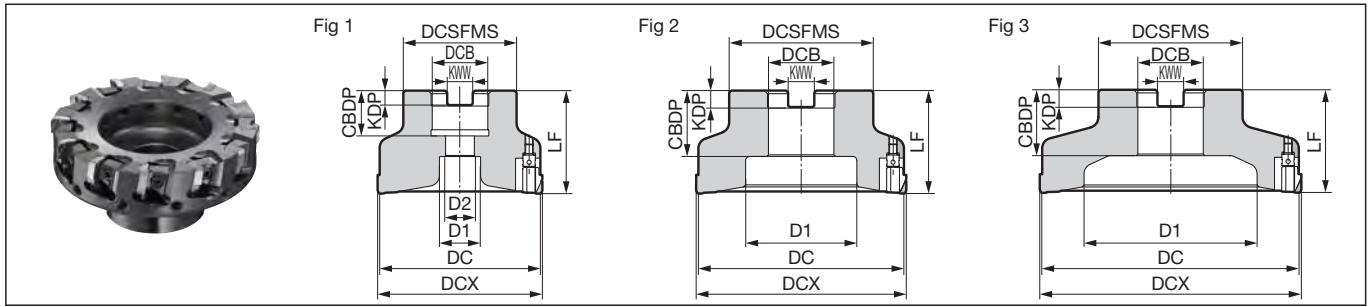

Body (Extra Fine Pitch: 3-Tooth/Inch)

Dimensions (mm)

Metric	Cat. No.	Stock	Dia.	Max. Dia.	Boss	Overall Length	Hole Dia.	Keyway Width	Keyway Depth	Mounting Depth	Bolt	Bolt	Number of Teeth	Weight (kg)	Fig
			DC	DCX	DCSFMS	LF	DCB	KWW	KDP	CBDP	D1	D2			
	HFF 12080RS-22	●	80	82	50	40	22	10.4	6.3	20	18	11	10	1.0	1
	12080RS-27	●	80	82	55	50	27	12.4	7	22	20	14	10	1.2	1
	12100RS-32	●	100	102	70	50	32	14.4	8	32	54	—	12	1.7	2
	12125RS-32	●	125	127	70	50	32	14.4	8	32	84	—	15	2.2	3
	12125RS-40	●	125	127	90	63	40	16.4	9	35	84	—	15	2.8	3
Inch	HFF 12080R-25.4	●	80	82	50	50	25.4	9.5	6	30	35	—	10	1.0	2
	12100R-25.4	●	100	102	50	50	25.4	9.5	6	30	54	—	12	1.5	2
	12100R-31.75	●	100	102	70	50	31.75	12.7	8	32	54	—	12	1.7	2
	12125R-25.4	●	125	127	50	50	25.4	9.5	6	30	84	—	15	2.0	3
	12125R-31.75	●	125	127	70	50	31.75	12.7	8	32	84	—	15	2.2	3
	12125R-38.1	●	125	127	80	63	38.1	15.9	10	36	84	—	15	2.5	3

Blades are sold separately.

Blade

Dimensions (mm)

Grade Classification		SUMIDIA
Process	High-speed/Light Cutting	N
	General-purpose	N
	Roughing	N

Cat. No.	DA1000	Cutting Edge Length	Wiper Edge Shape	Applications	Fig
NF-LDEN 12T3ZDFR-L	●	6.0	Linear	Low Cutting Force	1
12T3ZDFR-G	●	6.0	Arc-Shaped	General-purpose	1
12T3ZDTR-H	●	6.0	Arc-Shaped	Strong Edge	1
12T3ZDFR-GX	●	9.0	Arc-Shaped	Long Edge	2
12T3ZDFR-W	●	2.0	Arc-Shaped	Wiper	3

Parts

(Sold Separately)

Clamp Plate	Bolt	Adjustment Screw	Wrench	Wrench	Assembly Wrench
HFW	WB6-13T	6.0	HFJ	TTX20	RFT
					HFVT

Identification Code

HF F 12 080 R S - 22

Series Code Extra Blade Dia. Feed Metric Hole
Fine Pitch Size Direction Bore Dia.

Recommended Cutting Conditions

Si content of 12.6% or less

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	2,000-2,500-3,000	0.05-0.13-0.20	DA1000



Note · The cutting conditions are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
· The above are the recommended conditions for HF type overall. Use within the maximum allowable spindle speed.

Si content of over 12.6%

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	400-600-800	0.05-0.13-0.20	DA1000

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

HFFH 12000RS/R type

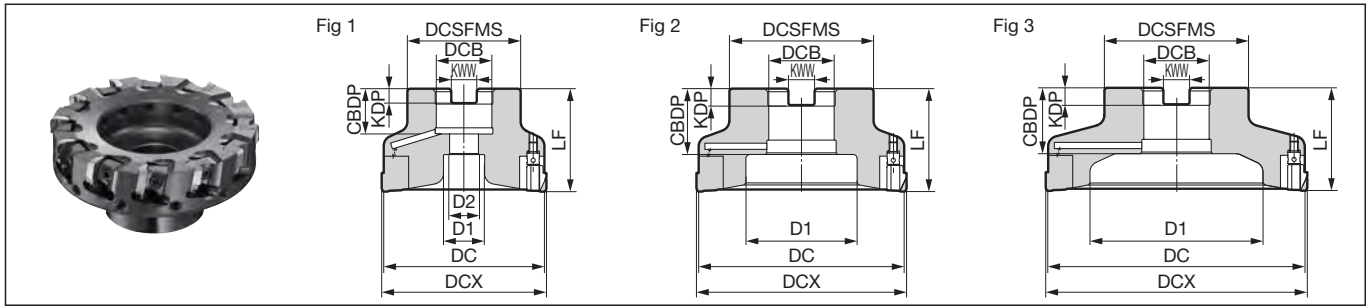

Body (Extra Fine Pitch: 3-Tooth/Inch) With Coolant Holes

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Overall Length LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
HFFH 12080RS-22	●	80	82	50	40	22	10.4	6.3	20	18	11	10	1.0	1
12080RS-27	●	80	82	55	50	27	12.4	7	22	20	14	10	1.2	1
12100RS-32	●	100	102	70	50	32	14.4	8	32	54	—	12	1.7	2
12125RS-32	●	125	127	70	50	32	14.4	8	32	84	—	15	2.2	3
12125RS-40	●	125	127	90	63	40	16.4	9	35	84	—	15	2.8	3
HFFH 12080R-25.4	●	80	82	50	50	25.4	9.5	6	30	35	—	10	1.0	2
12100R-25.4	●	100	102	50	50	25.4	9.5	6	30	54	—	12	1.5	2
12100R-31.75	●	100	102	70	50	31.75	12.7	8	32	54	—	12	1.7	2
12125R-25.4	●	125	127	50	50	25.4	9.5	6	30	84	—	15	2.0	3
12125R-31.75	●	125	127	70	50	31.75	12.7	8	32	84	—	15	2.2	3
12125R-38.1	●	125	127	80	63	38.1	15.9	10	36	84	—	15	2.5	3

Blades are sold separately.

Blade

Dimensions (mm)

Grade Classification		SUMIDIA				
Process	High-speed/Light Cutting	N				
	General-purpose	N				
	Roughing	N				
Cat. No.		DA1000	Cutting Edge Length	Wiper Edge Shape	Applications	Fig
NF-LDEN 12T3ZDFR-L		●	6.0	Linear	Low Cutting Force	1
12T3ZDFR-G		●	6.0	Arc-Shaped	General-purpose	1
12T3ZDTR-H		●	6.0	Arc-Shaped	Strong Edge	1
12T3ZDFR-GX		●	9.0	Arc-Shaped	Long Edge	2
12T3ZDFR-W		●	2.0	Arc-Shaped	Wiper	3

Parts

(Sold Separately)

Clamp Plate	Bolt	Wrench	Adjustment Screw	Wrench	Assembly Wrench
HFV	WB6-13T	6.0	TTX20	HFJ	RFT
					HFVT

Identification Code

HF F H 12 080 R S - 22

Series Code Extra With Blade Dia. Feed Metric Hole
 Fine Pitch Oil Size Direction Bore Dia.

Recommended Cutting Conditions

Si content of 12.6% or less

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	2,000-2,500-3,000	0.05-0.13-0.20	DA1000

Note - The above are the recommended conditions for HF type overall. Use within the maximum allowable spindle speed.
 - The cutting conditions are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Si content of over 12.6%

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	400-600-800	0.05-0.13-0.20	DA1000


Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

HFFH 12000R-BBT30 type



Rake Angle	Radial	4°
	Axial	10°

3mm 90° Face Milling

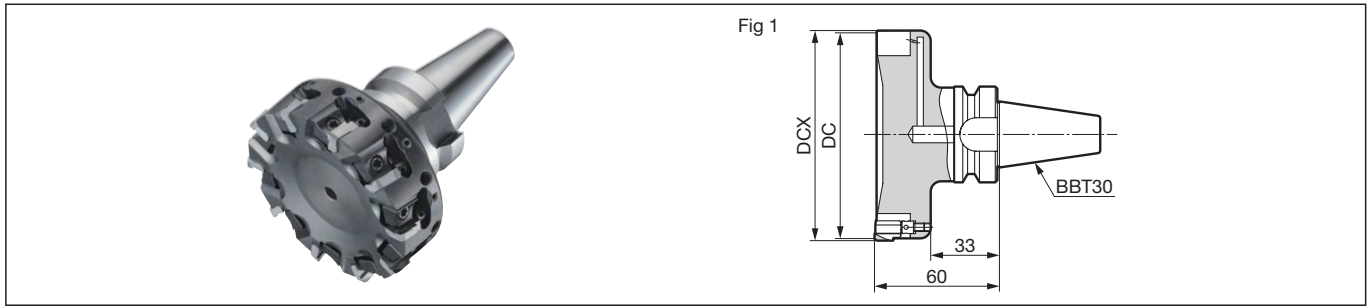

Body (Extra Fine Pitch: 3-Tooth/Inch) With Coolant Holes

Dimensions (mm)

Cat. No.		Stock	Dia. DC	Max. Dia. DCX	Number of Teeth	Weight (kg)	Fig
Inch	HFFH 12080R-BBT30	●	80	82	10	1.6	1
	12100R-BBT30	●	100	102	12	2.4	1
	12125R-BBT30	●	125	127	15	2.6	1

Blades are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Blade

Dimensions (mm)

Grade Classification		SUMIDIA				
Process	High-speed/Light Cutting	N				
	General-purpose	N				
	Roughing	N				
Cat. No.		DA1000	Cutting Edge Length	Wiper Edge Shape	Applications	Fig
NF-LDEN 12T3ZDFR-L		●	6.0	Linear	Low Cutting Force	1
12T3ZDFR-G		●	6.0	Arc-Shaped	General-purpose	1
12T3ZDTR-H		●	6.0	Arc-Shaped	Strong Edge	1
12T3ZDFR-GX		●	9.0	Arc-Shaped	Long Edge	2
12T3ZDFR-W		●	2.0	Arc-Shaped	Wiper	3

Fig 1

Fig 2

Fig 3 Wiper Blade

Parts

(Sold Separately)

Clamp Plate	Bolt	Wrench	Adjustment Screw	Wrench	Assembly Wrench
HFW	WB6-13T	6.0	TTX20	HFJ	RFT

Identification Code

HF F H 12 080 R - BBT30

Series Code	Extra Fine Pitch	With Oil Hole	Blade Size	Dia.	Feed Direction	Supported Arbor Symbol
-------------	------------------	---------------	------------	------	----------------	------------------------

Recommended Cutting Conditions

Si content of 12.6% or less

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	2,000- 2,500 -3,000	0.05- 0.13 -0.20	DA1000

Note · The above are the recommended conditions for HF type overall. Use within the maximum allowable spindle speed.
· The cutting conditions are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Si content of over 12.6%

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Blade Grade
N	Aluminum Alloy	400- 600 -800	0.05- 0.13 -0.20	DA1000

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

* BIG-PLUS™ is a registered trademark of BIG DAISHOWA Co., Ltd.

* Can also be used with BT30 spindle machines.

RF series

Milling Cutters



■ Features

The RF series cutter has a lightweight body designed for high-speed, high-performance roughing to finish milling of aluminum alloys and other non-ferrous metals.

■ Work Material

- Aluminum and aluminum alloys (Not suited for cast iron or steel.)
- Other Non-Ferrous Metals

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed

- From Roughing to Finishing Processes: Roughing: Economical carbide insert / Finishing: High-precision SUMIDIA insert
- Strong and Lightweight Body: Special aluminum alloy body. 40% lighter than steel cutters. Hard anodizing. Improved efficiency with higher spindle speeds, lower spindle loads and shorter tool change time
- Safety Design: Prevents inserts from dislodging from cutter due to centrifugal force. (Speeds must be within max. recommended conditions)
To prevent warping, wedges are not used in the cutter construction
- Easy Runout Adjustment: External setting gauge is used for easy tool presetting. High-precision cutter construction - units fitted are within 10µm runout even before setting

■ Surface Finish

<ul style="list-style-type: none"> · Process: Finish Milling · Machine: Vertical Machining Centre · Arbor: HSK63A · Work Material: Si 10 to 12% Al Alloy · Cutter: RF4100R 6-Tooth (1 Wiper) · Grade: SUMIDIA (DA1000) 	<ul style="list-style-type: none"> · $vc = 4,990\text{m/min}$ · $n = 15,900\text{min}^{-1}$ · $vf = 11,400\text{mm/min}$ · $fz = 0.12\text{mm/t}$ · $ap = 0.5\text{mm}$, Wiper $ap = 0.03\text{mm}$, Dry
--	---


Rz (Highest Peak): 0.69µm Ra: 0.092µm

● Maximum Allowable Spindle Speed

Cat. No.	n max (min ⁻¹)
RF4080R	17,000
RF4100R	15,900
RF4125R	13,500
RF4160R	11,000
RF4200R	9,000
RF4250R	7,600
RF4315R	6,000

* The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force.

■ Structure of RF type

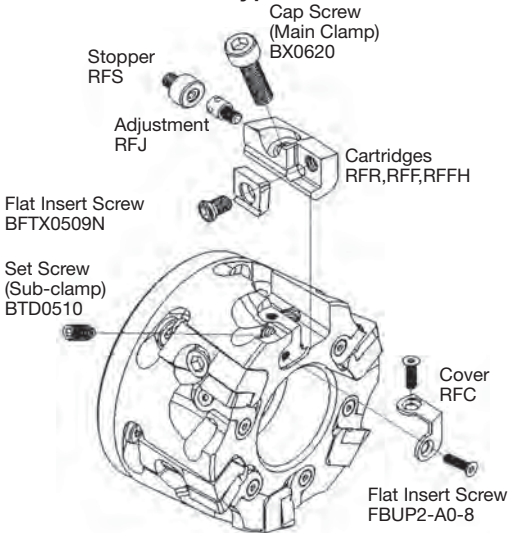

■ Product Range

Type	Cat. No.	Dia. (mm)						
		ø80	ø100	ø125	ø160	ø200	ø250	ø315
Shell	RF 4000R	6	6	8	10	12	16	18

Number in ●○ shows the number of teeth Inch Bore

■ Recommended Cutting Conditions

Si content of 12% or less

ISO	Work Material	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
		Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
N	Aluminum Alloy	2,000-2,500-3,000	0.05-0.13-0.20	DA1000	DA2200	
		300-650-1,000	0.05-0.13-0.20	H1		

Note The above are the recommended conditions for RF type overall. Use within the maximum allowable spindle speed.
The cutting conditions are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Si content of over 12%


ISO	Work Material	Cutting Speed vc (m/min)		Feed Rate fz (mm/t)		Insert Grade
		Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	Min. - Optimum - Max.	
N	Aluminum Alloy	400-600-800	0.05-0.13-0.20	DA1000	DA2200	
		200-300-400	0.05-0.13-0.20	H1		

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.


● Recommended Cutting Edge Position

We recommend positioning as in the figure below when mounting carbide inserts or SUMIDIA inserts (blades).

- When roughing and finishing in the same process



- When using wiper edge



⚠ CAUTIONS (For more details, refer to the instruction manual included with the product)


As it is possible to mix different types of inserts/blades, it is important to take note of the following.

- Do not mix reground and new inserts or inserts with a different regrinding allowance on the same cutter.
- Carbide and SUMIDIA inserts must be arranged alternately.
- When using a combination of SUMIDIA blades and inserts, ensure proper balance by mounting the same type of cutting edges on opposite sides of the cutter.

RF 4000R type



Rake Angle	Radial	4°	3mm	90°	10mm	87°	
	Axial	10°	(SUMIDIA Insert)	(Carbide Insert)			

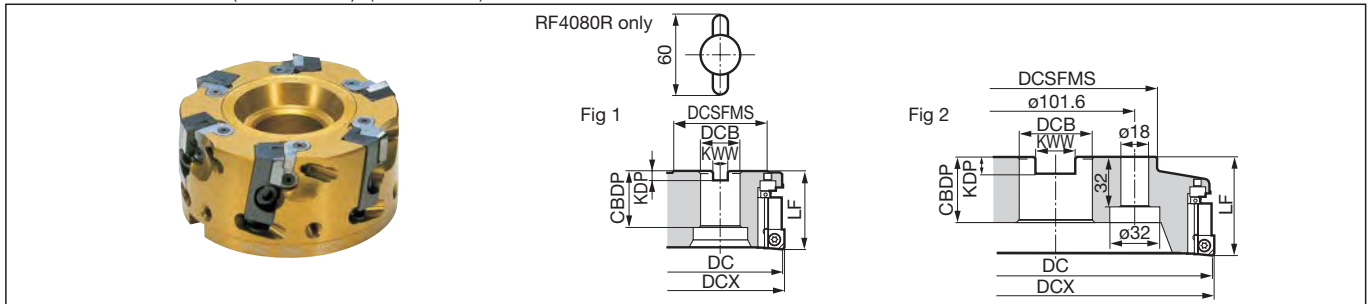

Body

												Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Overall Length LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CDBP	Number of Teeth	Weight (kg)	Fig	
RF 4080R	●	80	82	60	50	25.4	9.5	6	30	6	0.7	1	
4100R	●	100	102	75	50	31.75	12.7	8	38	6	1.0	1	
4125R	●	125	127	75	63	38.1	15.9	10	38	8	1.6	1	
4160R	●	160	162	100	63	50.8	19.1	11	38	10	2.6	1	
4200R	●	200	202	130	63	47.625	25.4	14	42	12	3.6	2	
4250R	●	250	252	130	63	47.625	25.4	14	42	16	6.0	2	
4315R	●	315	317	240	80	47.625	25.4	14	42	18	11.0	2	

Cartridges, blades and inserts are sold separately.
Use a flanged bolt to mount the cutter to the arbor.

Insert/Cartridge

Grade Classification		Cemented Carbide	DLC	SUMIDIA	SUMICRYSTAL	Dimensions (mm)						
Process	High-speed/Light Cutting	N	N	N	N	Refer to page M64 for details of SUMICRYSTAL.						
	General-purpose	N	N	N	N	*When using large depth of cut (ap = 3mm or longer) with RF4080R, use the RFFH cartridge. (RFF is possible for normal cutting.)						
	Roughing	N	N	N	N							
Cat. No.	H	DL1000	DA1000	DA2200	SC10	Fig	Cartridges Cat. No.	Cartridges Stock	Fig			
SDET 1204ZDFR	●	—	—	—	—	3	RFR	●	1			
NF-SNEW 1204ADFR	—	—	●	▲	—	4	RFF	●	2			
120404ADFR-H	—	—	●	—	—	5	RFF (Others) RFFH(RF4080R)	●	2			
1204ADFR-W	—	—	●	▲	—	6	RFF	●	2			
SNEW 1204ADFR-WS	—	—	—	—	●	7	RFF	●	2			

An "H" at the end of the part number indicates large depth of cut type, while "W" or "WS" indicates a wiper insert.

Parts

Cover	Stopper	Cap Screw	Set Screw	Flat Insert Screw	Adjustment	Flat Insert Screw	Wrench	Wrench			
		Main Clamp 	Sub-clamp 	Cover Mounting 							
RFC	RFS	BX0620	10.0	BTD 0510	3.0	FBUP2-A0-8	RFJ	BFTX 0509N	5.0	TH050 TH025 RFT	TTX20


Blades/Dummy Blades

Product Name	Cat. No.	SUMIDIA
SUMIDIA Blade	RFB	●
SUMIDIA Wiper Blade	RFBW	●
Dummy Blade	RFD	●(Steel)

Use dummy blades for unused teeth to protect the body as well as maintaining balance.

Setting Parts

Cartridge design allows inserts to be attached outside the machine with high precision.



Setting Gauge RF-SET (Sold Separately/ Standard Stock)
Clamp Jig RF-JIG (Sold Separately/ Standard Stock)

*Dial gauge is not included.

Internal Coolant Attachments

For internal coolant supply, use an internal coolant holder or a commercially available clamp bolt with coolant holes. Typical examples are given in the table below. For specifications, contact each manufacturer directly.

Body Cat. No.	Internal Coolant Holder	Standard Clamp Bolt with Coolant Hole (Example)
RF 4080R	—	MBC-M12 TMBA-M12
RF 4100R	—	MBC-M16 TMBA-M16
RF 4125R	—	MBC-M20 TMBA-M20
RF 4160R	—	MBC-M24 TMBA-M24
RF 4200R	RF-CLT	—
RF 4250R	RF-CLT	—
RF 4315R	RF-CLT	—

Internal Coolant Holders RF-CLT (Standard Stock)

Standard Clamp Bolt with Coolant Hole [Typical Example] MBC-M12 to M24 (Sold Separately)



Direction of Coolant Streams

SRF series

Milling Cutters

H

Face Milling

Shoulder Milling

High-Feed

Multi-purpose

Radius

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Cast Iron, High-Speed



■ Features

The SRF type is ideal for aluminum alloy machining on high-performance small machines.

- **Ideal for small machines**
Especially reliable on BT30 class small machines.
- **From roughing to finishing processes**
Utilises SUMIDIA DA1000 inserts with effective cutting edge length of 5mm.
- **Economical NF type inserts:**
NF type SUMIDIA inserts with tough DA1000 grade lower tooling costs.
- **High-speed cutting with SUMIDIA:**
Maximum spindle speeds of up to $n = 20,000\text{min}^{-1}$
(Please operate within the maximum allowable spindle speed of the machine and holder used)
*The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force.
- **Simple runout adjustment mechanism:**
Simple direct insert mounting design with easy fine-adjustment for runout precision.

■ Recommended Cutting Conditions

Si content of 12% or less

ISO	Work Material	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grade
N	Aluminum Alloy	2,000- 3,000 -4,000	0.05- 0.13 -0.20	DA1000



Note · The above are the recommended conditions for SRF type overall. Use within the maximum allowable spindle speed.
· The cutting conditions are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

Si content of over 12%

ISO	Work Material	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grade
N	Aluminum Alloy	400- 600 -800	0.05- 0.13 -0.20	DA1000

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

SRF series

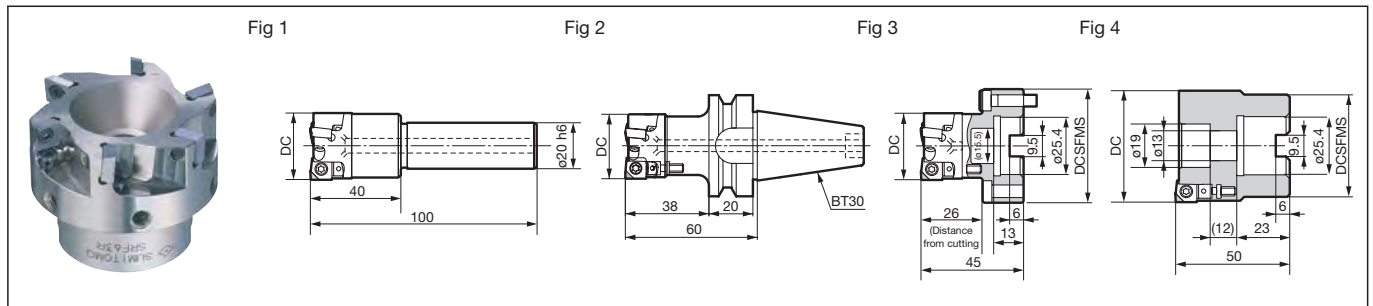

Body

Cat. No.		Stock	Dimensions (mm)				
			Dia. DC	Boss DCSFMS	Number of Teeth	Weight (kg)	Fig
Inch	SRF 30R-ST	●	30	—	3	0.34	1
	40R-ST	●	40	—	4	0.50	1
	SRF 30R-BT30	●	30	—	3	0.57	2
	40R-BT30	●	40	—	4	0.72	2
	SRF 30R	●	30	50.0	3	0.27	3
	40R	●	40	50.0	4	0.35	3
	50R	●	50	46.5	5	0.59	4
	63R	●	63	45.0	6	0.67	4

Inserts are sold separately.

Product Range


Type	Cat. No.	Dia. (mm)			
		ø30	ø40	ø50	ø63
Shell	SRF 30R(-ST)	3			
	SRF 40R(-ST)		4		
	SRF 30R-BT30	3			
	SRF 40R-BT30		4		
	SRF 50R <small>inch</small>			5	
	SRF 63R <small>inch</small>				6

Number in ● shows the number of teeth inch Inch Bore

Note For mounting the cutters marked with * to an arbor, use a hex socket bolt (JIS B1176) M12 x 30 to 35mm.


Insert

Grade Classification		SUMIDIA		Cutting Edge Shape	Fig
Process	High-speed/Light Cutting	N	N		
	General-purpose	N	N		
	Roughing	N	N		
Cat. No.		DA1000	DA2200		
NF-SNEW 09T3ADTR		●	▲	Standard	1
09T3ADTR-U		●	▲	Wiper Flat	2
09T3ADTR-R		●	▲	Corner Radius	3

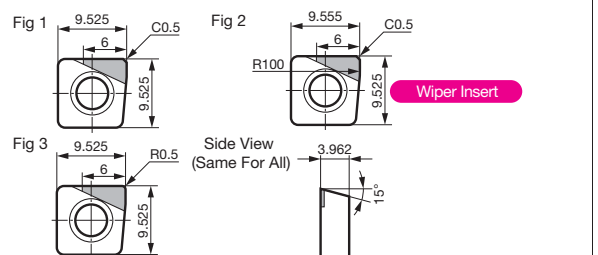

Recommended Cutting Conditions **H242**

- Standard inserts and wiper inserts can be used on the same cutter body.
- Standard inserts with corner radius should be used where chatter is present. These cannot be used with wiper inserts.
- Inserts can be reground 3 times (up to minimum IC diameter of 9.225mm), but the cutting edge height changes by the reground amount.
- Do not mix new and reground inserts or inserts with different regrind amounts on the same cutter.
- When using reground inserts, it is advisable to re-confirm cutting edge position with a tool pre-setter.
- Arbor for SRF30R, SRF40R




When using SRF30R and SRF40R cutters, the arbor needs to be modified as shown above.

(1. Reduce part of the arbor's adapter shaft length from ø25.4 to ø15. 2. Add 4 tap holes for (M5) mounting bolts.) Use hex socket bolts M5 x 20mm for securing the body.

Parts

Flat Insert Screw	Adjustment Screw	Wrench
BFTX0409N	SRFJ	TH015 TTX15W



Maximum Depth of Cut (SRF50R, 5-Tooth)

The table below contains guidelines on the maximum depth of cut, determined from internal tests. 'O' marks indicate the possible application range. Actual cutting conditions should be set based on the actual machine and workpiece characteristics.

Depth of Cut ap (mm)	Feed Rate	Feed Rate (vf) (mm/min)		
		2,500	4,000	5,000
		Feed Rate Per Tooth fz (mm/t)		
		0.05	0.08	0.10
0.5		○	○	○
1.0		○	○	○
1.5		○	○	○
2.0		○	○	○
2.5		○	○	○
3.0		○	○	○
3.5		○	○	○
4.0		○	○	○
4.5		○	○	○
5.0		○	○	○

Cutting Conditions

Cutter : SRF50R
 Insert : NF-SNEW 09T3ADTR (DA1000)
 n = 10,000min⁻¹
 Arbor : BT30 FMA25.4-45
 Workpiece : A-5052
 Width : Maximum depth of cut at 35mm





■ Features


- Ideal for Roughing to Finishing of Non-ferrous Metals such as Aluminum Alloy
- Excellent Adhesion Resistance
Top rake face of the insert has a lapped finish AURORA (DLC) Coat grade - DL1000, for improved adhesion resistance also available
- Safety Design
Prevents dislodging of inserts caused by centrifugal force
- Coolant Compatible
Coolant holes are a standard feature for the whole series

■ Product Range


Type	Cat. No.	Dia. (mm)								
		ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100	ø125
Shell	WAX 3000-3.2					4	5			
	WAX 3000-3.2 <small>Inch</small>							5	6	7
	WAX 3000-4.0					4	4			
	WAX 3000-4.0 <small>Inch</small>							5	6	7
	WAX 4000-3.2					2	3			
	WAX 4000-3.2 <small>Inch</small>							4	5	6
Shank	WAX 3000E-3.2	1	2	2	3					
	WAX 3000EL-3.2		2	2	3					
	WAX 3000E-4.0	1	2	2	3					
	WAX 3000EL-4.0		2	2	3					
	WAX 4000E-3.2		1	1	2					
	WAX 4000EL-3.2		1	1	2					
	WAX 4000E-4.0		1	1	2					
	WAX 4000EL-4.0		1	1	2					

Number in ● shows the number of teeth Inch Inch Bore

■ Suitable for Various Applications

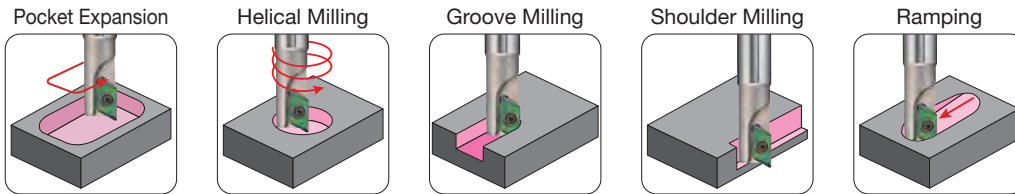

■ Ramping/Helical Milling Upper Limit and Allowable Maximum Spindle Speed

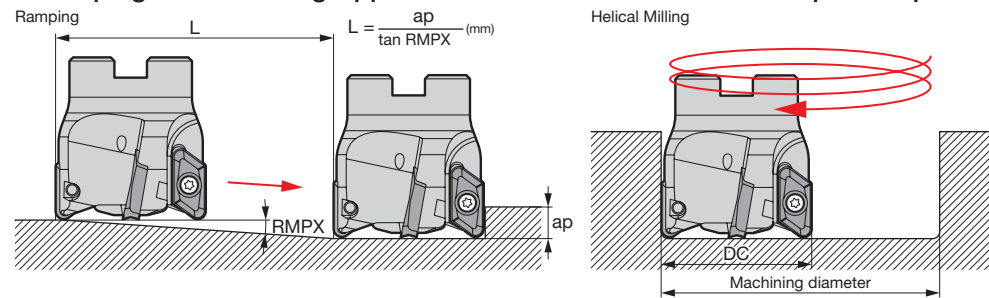

Dia. DC (mm)	Ramping		Helical Milling				Maximum Allowable Spindle Speed			
	WAX3000 type	WAX4000 type	WAX3000 type		WAX4000 type		WAX3000 type		WAX4000 type	
	Max. Ramping Angle RMPX (°)		Min. Machining Dia. (mm)	Max. Bore Dia. (mm)	Min. Machining Dia. (mm)	Max. Bore Dia. (mm)	n max (min ⁻¹)	vc (m/min)	n max (min ⁻¹)	vc (m/min)
20	28	—	22	33	—	—	14,000	880	—	—
25	17	26	29	43	27	43	29,000	2,200	11,000	860
32	12	18.5	43	57	38	57	25,000	2,500	9,000	900
40	9	13	59	73	54	73	23,000	2,900	20,000	2,500
50	7	9.5	79	93	74	93	20,000	3,100	18,000	2,800
63	5	7	105	119	100	119	18,000	3,500	16,000	3,100
80	3	5	139	153	134	153	16,000	4,000	14,000	3,500
100	3	4	179	193	174	193	14,000	4,400	12,000	3,700
125	2	3	229	243	224	243	13,000	5,100	11,000	4,300


*Maximum ramping angle (RMPX) depends on cutter diameter DC (mm). Minimum milling distance (L) for any depth of cut can be calculated by the equation above.
*The maximum allowable spindle speeds are set to prevent the inserts from dislodging by centrifugal force.

■ Grade Features

Work Material	Grade	Coating Thickness (µm)	Features
	DL1000	0.5	Coating with an extremely low coefficient of friction and excellent resistance to aluminum adhesion, provides stable cutting edge sharpness and chip evacuation. In combination with a dedicated carbide substrate for non-ferrous metals, wear resistance is further improved.

■ Grade Application Range

Work Material	Finishing to Light Cutting	Medium Cutting	Rough to Heavy Cutting
	DL1000		

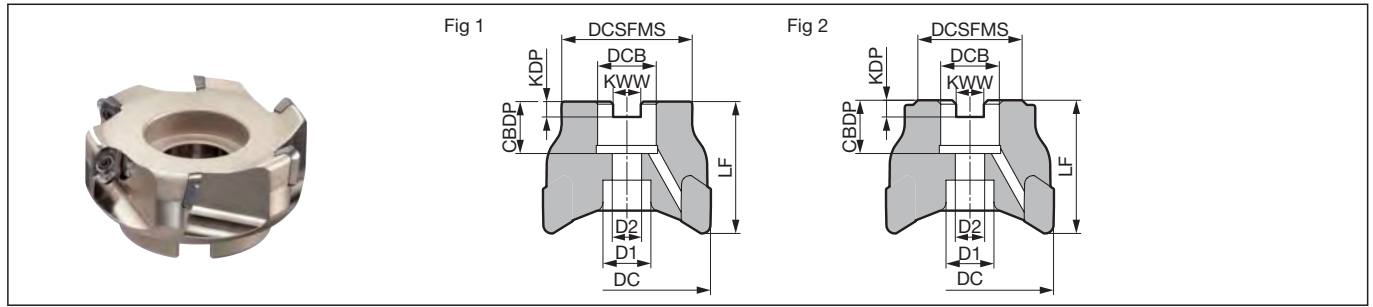

Body (Shell Type for RE = 3.2 and below)

													Dimensions (mm)	
	Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	WAX 3050-3.2	●	50	42	50	22	10.4	6.3	21	18	11	4	0.34	1
	3063-3.2	●	63	42	50	22	10.4	6.3	21	18	11	5	0.6	2
Inch	WAX 3080-3.2	●	80	57	50	25.4	9.5	6	25	26	14	5	1.0	1
	3100-3.2	●	100	67	63	31.75	12.7	8	32	28	17	6	2.2	1
	3125-3.2	●	125	87	63	38.1	15.9	10	35	30	21	7	3.5	1

Body (Shell Type for RE = 4.0 and above)

													Dimensions (mm)	
	Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
Metric	WAX 3050-4.0	●	50	42	50	22	10.4	6.3	21	18	11	4	0.34	1
	3063-4.0	●	63	42	50	22	10.4	6.3	21	18	11	4	0.6	2
Inch	WAX 3080-4.0	●	80	57	50	25.4	9.5	6	25	26	14	5	1.0	1
	3100-4.0	●	100	67	63	31.75	12.7	8	32	28	17	6	2.2	1
	3125-4.0	●	125	87	63	38.1	15.9	10	35	30	21	7	3.5	1

Inserts are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Grade Classification			Cemented Carbide	DLC						Dimensions (mm)	
Process	High-speed/Light Cutting		N	N							
	General-purpose			N							
	Roughing										
Cat. No.	H1	DL1000	Max. Depth of Cut APMX	Wiper BS	Corner Radius RE	Fig					
AECT 160404PEFRA	●	●	18	1.4	0.4	1					
160408PEFRA	●	●	18	1.0	0.8	1					
160412PEFRA	●	●	18	0.6	1.2	1					
160416PEFRA	●	●	17.5	0.5	1.6	1					
160420PEFRA	●	●	17.5	0.5	2.0	1					
160430PEFRA	●	●	17	0.7	3.0	1					
160432PEFRA	●	●	17	0.5	3.2	1					
AECT 160440PEFRA	●	●	16.5	0.5	4.0	1					
160450PEFRA	●	●	16	0.4	5.0	1					

Inserts with a corner radius of RE = 4.0 or greater are for use with bodies that have a "-4.0" part number suffix.

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0408	3.0 TRD15	SUMI-P

Recommended Cutting Conditions

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
N	Aluminum Alloy	600-900-1,200	0.05-0.15-0.25	H1 DL1000

Note - The above are the recommended conditions for WAX3000 type overall. Use within the maximum allowable spindle speed.
 - The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
 - For groove milling, adjust the feed rate to around 70% of the above values.


WAX 3000E/EL type



Rake Angle	Radial	6°
	Axial	19° to 25°

16 to 18mm 90°

Milling Cutters

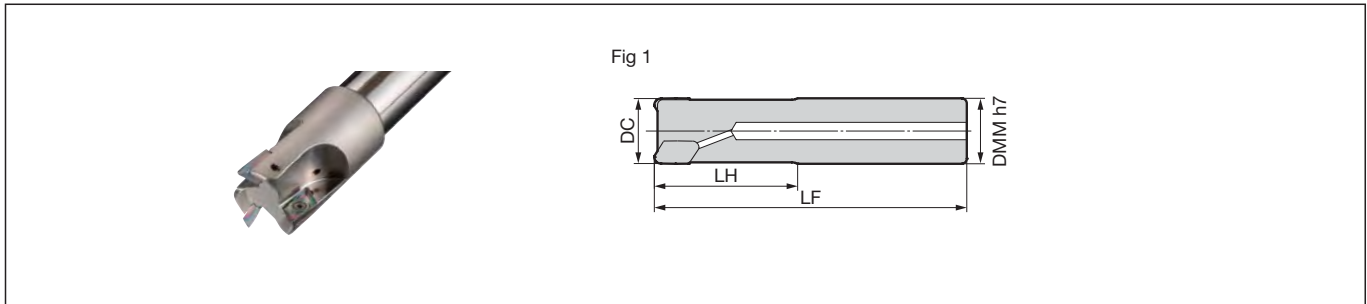

Face Milling

Body (Shank Type for RE = 3.2 and below)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Overall Length		Head LH	Number of Teeth	Weight (kg)	Fig
				LF	LF				
WAX 3020E -3.2	●	20	20	130	60	1	0.25	1	
3025E -3.2	●	25	25	140	60	2	0.42	1	
3025EL-3.2	●	25	25	200	60	2	0.63	1	
3032E -3.2	●	32	32	150	70	2	0.75	1	
3032EL-3.2	●	32	32	220	70	2	1.2	1	
3040E -3.2	●	40	32	160	70	3	1.0	1	
3040EL-3.2	●	40	32	220	70	3	1.4	1	

Inserts are sold separately.

Shoulder Milling

High-Feed

Body (Shank Type for RE = 4.0 and above)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Overall Length		Head LH	Number of Teeth	Weight (kg)	Fig
				LF	LF				
WAX 3020E -4.0	●	20	20	130	60	1	0.25	1	
3025E -4.0	●	25	25	140	60	2	0.42	1	
3025EL-4.0	●	25	25	200	60	2	0.63	1	
3032E -4.0	●	32	32	150	70	2	0.75	1	
3032EL-4.0	●	32	32	220	70	2	1.2	1	
3040E -4.0	●	40	32	160	70	3	1.0	1	
3040EL-4.0	●	40	32	220	70	3	1.4	1	

Inserts are sold separately.

Multi-purpose


Radius

Insert

Dimensions (mm)

Grade Classification	Cemented Carbide	DLC		Cat. No.	H1	DL1000	Max. Depth of Cut APMX	Wiper BS	Corner Radius RE	Fig
		N	N							
High-speed/Light Cutting	N	N								
General-purpose		N								
Roughing										
AECT 160404PEFRA	●	●	18	1.4	0.4	1				
160408PEFRA	●	●	18	1.0	0.8	1				
160412PEFRA	●	●	18	0.6	1.2	1				
160416PEFRA	●	●	17.5	0.5	1.6	1				
160420PEFRA	●	●	17.5	0.5	2.0	1				
160430PEFRA	●	●	17	0.7	3.0	1				
160432PEFRA	●	●	17	0.5	3.2	1				
AECT 160440PEFRA	●	●	16.5	0.5	4.0	1				
160450PEFRA	●	●	16	0.4	5.0	1				

Fig 1

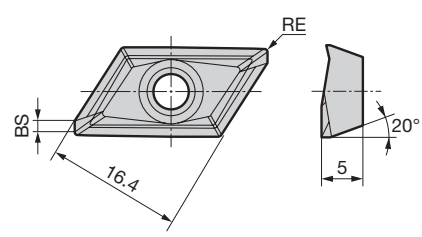

Inserts with a corner radius of RE = 4.0 or greater are for use with bodies that have a "-4.0" part number suffix.

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Parts

Applicable Cutter	Flat Insert Screw	Wrench	Anti-seizure Cream	
	WAX3020E type	BFTX0407K	3.0	TRD15
Other than above	BFTX0408			


Recommended Cutting Conditions

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
N	Aluminum Alloy	600-900-1,200	0.05-0.15-0.25	H1 DL1000

Note · The above are the recommended conditions for WAX3000 type overall. Use within the maximum allowable spindle speed.
 · The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
 · For groove milling, adjust the feed rate to around 70% of the above values.

Rake Angle	Radial	6°
	Axial	19° to 25°

22 to 24 mm 90°

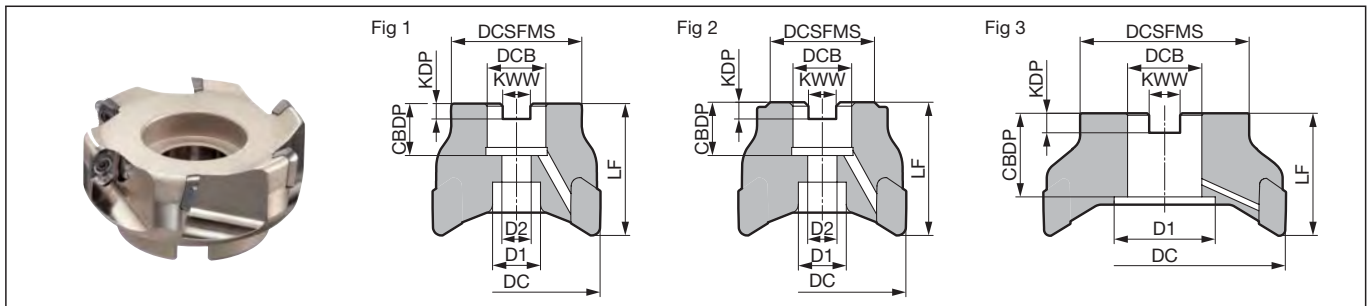

Body (Shell Type for RE = 3.2 and below)

Dimensions (mm)

Metric	Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
4063-3.2	●	63	49	50	22	10.4	6.3	21	18	11	3	0.54	2	
Inch	WAX 4080-3.2	●	80	57	50	25.4	9.5	6	25	26	14	4	0.81	1
4100-3.2	●	100	67	63	31.75	12.7	8	32	28	17	5	1.7	1	
4125-3.2	●	125	87	63	38.1	15.9	10	43	52	—	6	2.6	3	

Inserts are sold separately.

Body (Shell Type for RE = 4.0 and above)

Dimensions (mm)

Metric	Cat. No.	Stock	Dia. DC	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Bolt D1	Bolt D2	Number of Teeth	Weight (kg)	Fig
4063-4.0	●	63	49	50	22	10.4	6.3	21	18	11	3	0.54	2	
Inch	WAX 4080-4.0	●	80	57	50	25.4	9.5	6	25	26	14	4	0.81	1
4100-4.0	●	100	67	63	31.75	12.7	8	32	28	17	5	1.7	1	
4125-4.0	●	125	87	63	38.1	15.9	10	43	52	—	6	2.8	3	

Inserts are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Insert

Dimensions (mm)

Grade Classification		Cemented Carbide	DLC				
Process	High-speed/Light Cutting	N	N				
	General-purpose		N				
	Roughing						
Cat. No.	H1	DL1000	Max. Depth of Cut APMX	Wiper BS	Corner Radius RE	Fig	
AECT 220604PEFRA	●	●	24	1.5	0.4	1	
220608PEFRA	●	●	24	1.2	0.8	1	
220612PEFRA	●	●	24	0.8	1.2	1	
220616PEFRA	●	●	24	0.4	1.6	1	
220620PEFRA	●	●	24	0.5	2.0	1	
220630PEFRA	●	●	23	0.6	3.0	1	
220632PEFRA	●	●	23	0.4	3.2	1	
AECT 220640PEFRA	●	●	22	1.2	4.0	1	
220650PEFRA	●	●	22	0.4	5.0	1	

Inserts with a corner radius of RE = 4.0 or greater are for use with bodies that have a "-4.0" part number suffix.

Parts

Flat Insert Screw	Wrench	Anti-seizure Cream
BFTX0511N	5.0 TRD20	SUMI-P

Recommended Cutting Conditions


ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
N	Aluminum Alloy	600-900-1,200	0.05-0.15-0.25	H1 DL1000

Note The above are the recommended conditions for WAX4000 type overall. Use within the maximum allowable spindle speed.
 · The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
 · For groove milling, adjust the feed rate to around 70% of the above values.



Rake Angle	Radial Angle	6°							
		19° to 25°							

Milling Cutters

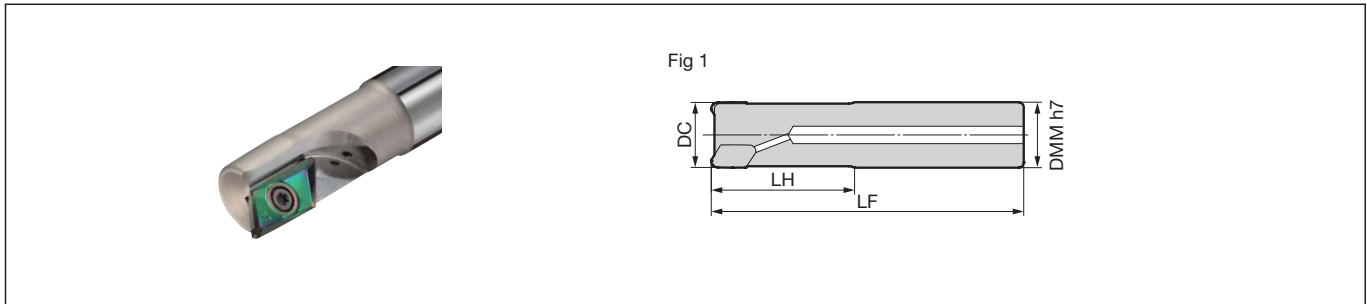

Face Milling

Body (RE = 3.2 or less)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WAX 4025E -3.2	●	25	25	60	140	1	0.41	1
4025EL-3.2	●	25	25	60	200	1	0.63	1
4032E -3.2	●	32	32	70	150	1	0.72	1
4032EL-3.2	●	32	32	70	220	1	1.2	1
4040E -3.2	●	40	32	70	160	2	0.88	1
4040EL-3.2	●	40	32	70	220	2	1.2	1

Shoulder Milling

High-Feed

Body (RE = 4.0 or more)

Dimensions (mm)

Cat. No.	Stock	Dia. DC	Shank DMM	Head LH	Overall Length LF	Number of Teeth	Weight (kg)	Fig
WAX 4025E -4.0	●	25	25	60	140	1	0.41	1
4025EL-4.0	●	25	25	60	200	1	0.63	1
4032E -4.0	●	32	32	70	150	1	0.72	1
4032EL-4.0	●	32	32	70	220	1	1.2	1
4040E -4.0	●	40	32	70	160	2	0.88	1
4040EL-4.0	●	40	32	70	220	2	1.2	1

Inserts are sold separately.

Multi-purpose


Radius

Insert

Dimensions (mm)

Grade Classification	Cemented Carbide		DLC					
	High-speed/Light Cutting							
Process	High-speed/Light Cutting	N	N					
	General-purpose		N					
	Roughing							
Cat. No.	H1	DL1000	Max. Depth of Cut APMX	Wiper BS	Corner Radius RE	Fig		
AECT 220604PEFRA	●	●	24	1.5	0.4	1		
220608PEFRA	●	●	24	1.2	0.8	1		
220612PEFRA	●	●	24	0.8	1.2	1		
220616PEFRA	●	●	24	0.4	1.6	1		
220620PEFRA	●	●	24	0.5	2.0	1		
220630PEFRA	●	●	23	0.6	3.0	1		
220632PEFRA	●	●	23	0.4	3.2	1		
AECT 220640PEFRA	●	●	22	1.2	4.0	1		
220650PEFRA	●	●	22	0.4	5.0	1		

Fig 1

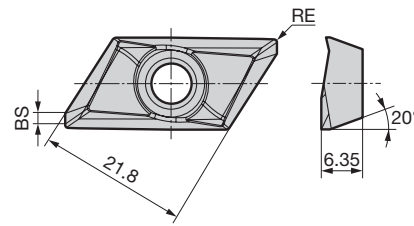

Inserts with a corner radius of RE = 4.0 or greater are for use with bodies that have a "-4.0" part number suffix.

Radial/3D Profiling

Side Cutters T-Slot Cutters

Chamfering

Non-Ferrous Metals

Parts

Applicable Cutter	Flat Insert Screw		Wrench	Anti-seizure Cream
	WAX4025E/EL type, WAX4032E/EL type	BFTX0509N	5.0	TRD20
WAX4040E/EL type	BFTX0511N			

Recommended Cutting Conditions

ISO	Work Material	Cutting Speed vc (m/min) Min. - Optimum - Max.	Feed Rate fz (mm/t) Min. - Optimum - Max.	Insert Grade
N	Aluminum Alloy	600-900-1,200	0.05-0.15-0.25	H1 DL1000

Note


- The above are the recommended conditions for WAX4000 type overall. Use within the maximum allowable spindle speed.
- The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.
- For groove milling, adjust the feed rate to around 70% of the above values.

Cast Iron, High-Speed

Expansion

Rake Angle	Radial	2°
Angle	Axial	8°

0.5mm 45°

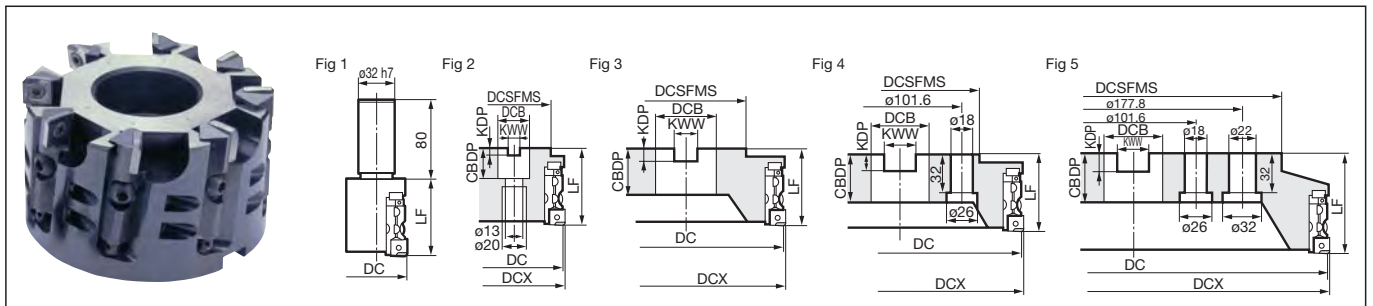


Body

												Dimensions (mm)	
Cat. No.	Stock	Dia. DC	Max. Dia. DCX	Boss DCSFMS	Overall Length LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Number of Teeth	Weight (kg)	Fig	
Inch	FMU 4040ER	●	37.2	40	—	63	—	—	—	2	1.0	1	
	4050ER	●	47.2	50	—	63	—	—	—	3	1.2	1	
	4063ER	●	60.2	63	60	63	25.4	9.5	6	25	4	1.0	2
	FMU 4080R	●	80	82.8	60	63	25.4	9.5	6	25	6	1.7	2
	4100R	●	100	102.8	76	63	31.75	12.7	8	38	8	2.5	3
	4125R	●	125	127.8	75	63	38.1	15.9	10	38	10	3.9	3
	4160R	●	160	162.8	100	63	50.8	19.1	11	38	12	6.3	3
	4200R	●	200	202.8	130	63	47.625	25.4	14	40	16	9.3	4
	4250R	●	250	252.8	130	63	47.625	25.4	14	40	20	14.5	4
	4315R	●	315	317.8	240	80	47.625	25.4	14	40	24	25.0	5


Inserts are sold separately.

Note: The values in red have been changed from the 2021-2022 General Catalogue.

Max. Depth of Cut

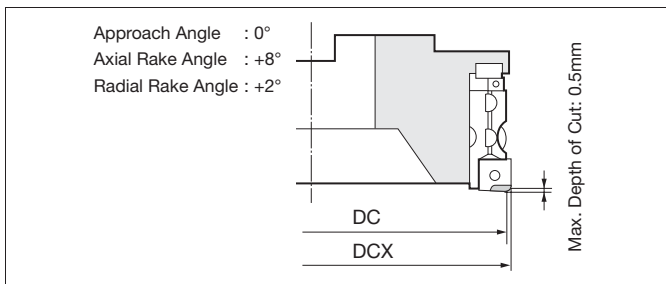

Structure

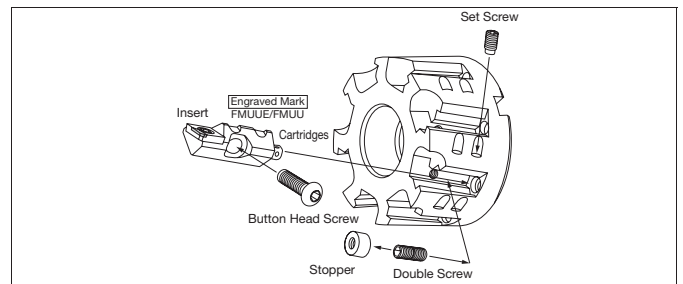

Insert

Grade Classification		SUMIBORON			
Process	High-speed/Light Cutting	K	K	K	
	General-purpose	K	K	K	
	Roughing				
Cat. No.		BN7125	BN7000	BN700	Fig
SNEW1203ADTR	○	●	▲	1	
1203ADTR-S	○	●	▲	2	

-S denotes a low-thrust insert.

Fig 1





Fig 2




Cartridges

Cartridges	Flat Insert Screw	Adjustment Bolt	O-ring	Wrench	Wrench
FMUU(E)	BFTX0509N	5.0	FMUJ	P3	TTX20
					TH015

* FMU4040ER/4050ER/4063ER use FMUUE type cartridges.

* FMUU/FMUUE are pre-assembled with flat screws and adjustment screws (with O-rings attached).

Setting Gauge



FMU-SET (Sold Separately)

*Dial gauge is not included.

Parts

Bolt	Set Screw	Stopper	Double Screw	Wrench	Wrench	Wrench (Radial)	Anti-seize Cream
BH0620	BTD0609	FMUE	WB5-10	TH040	LH030	LH025	SUMI-P

*FMU4040ER, 4050ER and 4063ER use BH0615 bolts.

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed vc (m/min)	Feed Rate fz (mm/t)	Insert Grades
K	Grey Cast Iron	250HB	800-1,400-2,000	0.10-0.20-0.30	BN7125(Dry)

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

FM series/FMF series




Expansion

Rake Angle	Radial	2°
Angle	Axial	8°

0.5mm **45°**

Face Milling

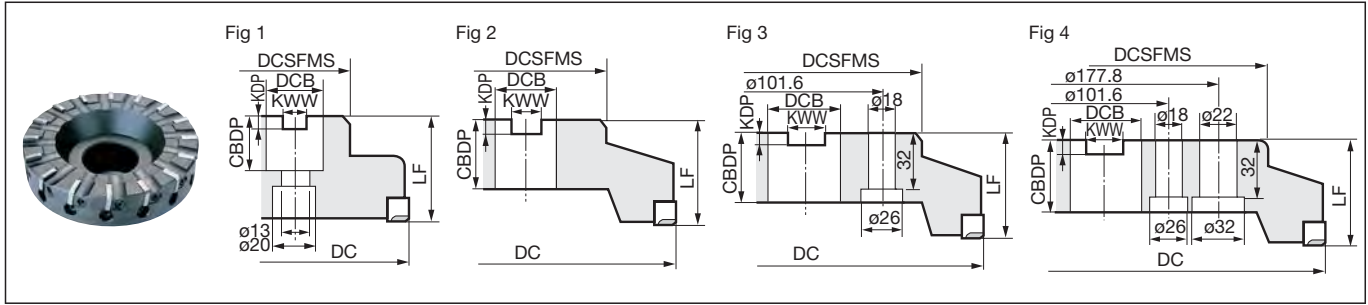

High-speed Finishing for Cast Iron

- Specially designed cutting edge shape combined with SUMIBORON grade for cast iron machining, realising high-speed milling of gray cast iron.

Body


Dimensions (mm)

Cat. No.	Stock		Dia. DC	Max. Dia. DCX	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBBDP	Number of Teeth	Weight (kg)	Fig
	R	L											
FM 5080 R/L	●		80	82.8	60	50	25.4	9.5	6	25	6	1.6	1
5100 R/L	●		100	102.8	75	50	31.75	12.7	8	32	8	2.4	2
5125 R/L	●		125	127.8	75	63	38.1	15.9	10	38	10	3.4	2
5160 R/L	●		160	162.8	100	63	50.8	19.1	11	38	12	5.6	2
5200 R/L			200	202.8	130	63	47.625	25.4	14	40	16	8.3	3
5250 R/L			250	252.8	130	63	47.625	25.4	14	40	20	14.3	3
5315 R/L			315	317.8	240	80	47.625	25.4	14	40	24	27.8	4
FMF 5125 R/L			125	127.8	75	63	38.1	15.9	10	38	12	3.4	2
5160 R/L			160	162.8	100	63	50.8	19.1	11	38	16	5.6	2
5200 R/L			200	202.8	130	63	47.625	25.4	14	40	20	8.3	3
5250 R/L			250	252.8	130	63	47.625	25.4	14	40	24	14.3	3
5315 R/L			315	317.8	240	80	47.625	25.4	14	40	28	27.8	4


Inserts are sold separately.

Body

Approach Angle : 0°
Axial Rake Angle : +8°
Radial Rake Angle : +2°




Structure



Insert

Dimensions (mm)

Grade Classification		SUMIBORON					
Process	High-speed/Light Cutting	K		K		K	
	General-purpose	K		K		K	
	Roughing						
Cat. No.		BN7125		BN7000		BN700	
		R	L	R	L	R	L
Cat. No.	SNEN 1504ADT R/L	○		●		▲	
	1504ADT R/L-S	○		●		▲	

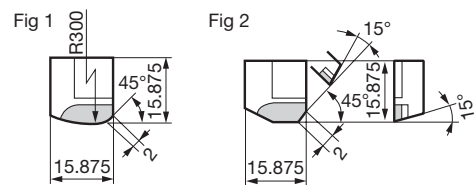


Parts

Applicable Cutter	Insert Clamp Plate	Adjustment Clamp	Adjustment Screw	Double Screw	Wrench	Wrench
FM5080R/L FM5100R/L FM5315R/L	FMW	FME	FMJ	WB7F-20TL	TT25	1.8 x 45

RM series



Rake Angle	Radial	-6° 45'	3mm	75°	
	Axial	-5° 45'			

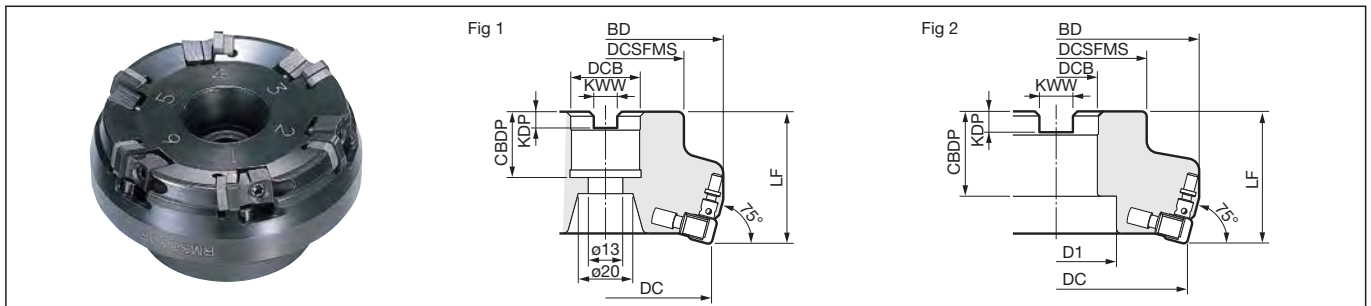

For High-speed, High-efficiency Milling of Cast Iron

- **High-efficiency Milling of Gray Cast Iron**
 - Utilises Solid SUMIBORON for high-speed cutting of $v_c = 1,500\text{m/min}$
 - High speed roughing with depth of cut up to 3.0mm
 - Wiper insert for high-speed finishing
- **Low Cost**
 - Economical double-sided insert with 8 usable corners
 - Insert can be reground and used again
- **Simple Runout Adjustment Mechanism**
 - Simple design for direct insert mounting
 - Easy yet precise runout precision adjustment



Body

Cat. No.		Stock	Di. DC	External Dia. BD	Boss DCSFMS	Height LF	Hole Dia. DCB	Keyway Width KWW	Keyway Depth KDP	Mounting Depth CBDP	Bolt D1	Number of Teeth	Maximum Spindle Speed (min ⁻¹)	Weight (kg)	Fig
Inch	RM 3080R		80	90	60	50	25.4	9.5	6	25	—	6	9,000	1.6	1
	RM 3100R		100	110	70	50	31.75	12.7	8	32	46	8	8,000	2.1	2
	3125R		125	135	80	63	38.1	15.9	10	38	59	10	7,000	3.9	2
	3160R		160	170	100	63	50.8	19.1	11	38	80	12	6,000	5.9	2

Inserts are sold separately.

Insert

Grade Classification		SUMIBORON		Fig
Process	High-speed/Light Cutting	K	K	
	General-purpose	K	K	
	Roughing	K	K	
Cat. No.		BNS8125	BNC8115	Fig
SNGN 090308		●	●	1
090312		●	●	1
SNEN 090308W		●	●	2

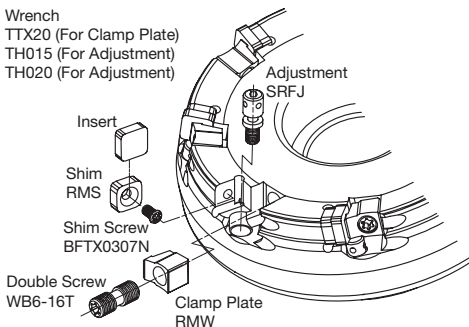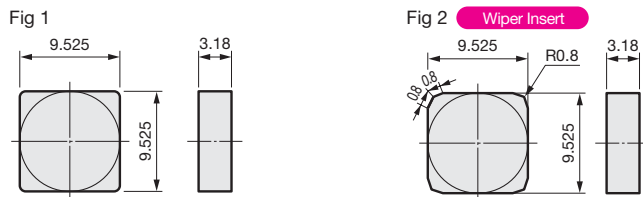

Parts

Shim	Shim Screw	Clamp Plate	Double Screw	Adjustment	Wrench (For Clamp Plate)	Wrench (For Adjustment)	Wrench (For Adjustment)	
RMS	BFTX0307N	2.0	RMW	WB6-16T	SRFJ	TTX20	TH015	TH020

⚠ Precautions for Use

- Do not use inserts with different catalogue numbers, such as a mix of standard and wiper inserts, on a single cutter setting.
- New and reground inserts cannot be mixed for use. Use either only new inserts or only reground inserts.
- Inserts can only be reground once (inscribed circle dimension must be at least 9.125mm).

For hardened steel machining, use the SEC-ACE MILL DNF type.

Body: **H47**

Insert: **L118**

Recommended Cutting Conditions

ISO	Work Material	Hardness	Cutting Speed v_c (m/min) Min. - Optimum - Max.	Feed Rate f_z (mm/t) Min. - Optimum - Max.	Insert Grades
K	Gray Cast Iron	250HB	800- 1,150 -1,500	0.05- 0.13 -0.20	BNS8125 (Dry)

Note The cutting conditions above are a guide. Actual conditions will need to be adjusted according to machine rigidity, work clamp rigidity, depth of cut and other factors.

MEMO

